



# OIL ANALYSIS REPORT

WEAR	<b>NORMAL</b>
CONTAMINATION	<b>NORMAL</b>
FLUID CONDITION	<b>NORMAL</b>



Machine Id  
**CATERPILLAR 980K 6058 (S/N W7K00517)**  
Component  
**Transmission (Manual)**  
Fluid  
**TULCO LUBSOIL TO-4 30 (17 GAL)**

## RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		<b>TO10003318</b>	TO10002971	TO10002781
Sample Date		Client Info		<b>06 Apr 2024</b>	26 Jan 2024	20 Oct 2023
Machine Age	hrs	Client Info		<b>19983</b>	19449	18890
Oil Age	hrs	Client Info		<b>1093</b>	559	994
Filter Age	hrs	Client Info		<b>534</b>	559	487
Oil Changed		Client Info		<b>Changed</b>	Not Changed	Changed
Filter Changed		Client Info		<b>Changed</b>	Changed	Changed
Sample Status				<b>NORMAL</b>	NORMAL	NORMAL

## WEAR

All component wear rates are normal.

PQ	UOM	Method	Limit/Abn	Current	History1	History2
Iron	ppm	ASTM D5185m	>200	<b>8</b>	4	4
Chromium	ppm	ASTM D5185m	>5	<b>0</b>	<1	<1
Nickel	ppm	ASTM D5185m	>5	<b>0</b>	0	<1
Titanium	ppm	ASTM D5185m		<b>0</b>	<1	<1
Silver	ppm	ASTM D5185m	>7	<b>0</b>	0	0
Aluminum	ppm	ASTM D5185m	>25	<b>&lt;1</b>	1	1
Lead	ppm	ASTM D5185m	>45	<b>0</b>	<1	0
Copper	ppm	ASTM D5185m	>225	<b>2</b>	2	4
Tin	ppm	ASTM D5185m	>10	<b>1</b>	<1	<1
Vanadium	ppm	ASTM D5185m		<b>0</b>	<1	0
White Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE

## CONTAMINATION













There is no indication of any contamination in the fluid.

Silicon	ppm	ASTM D5185m	>125	<b>8</b>	7	9
Potassium	ppm	ASTM D5185m	>20	<b>0</b>	0	2
Water		WC Method	>0.1	<b>NEG</b>	NEG	NEG
Silt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Debris	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Appearance	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Odor	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Emulsified Water	scalar	*Visual	>0.1	<b>NEG</b>	NEG	NEG

## FLUID CONDITION

The AN level is acceptable for this fluid. The condition of the fluid is suitable for further service.

Sodium	ppm	ASTM D5185m		<b>5</b>	2	<1
Boron	ppm	ASTM D5185m		<b>&lt;1</b>	<1	0
Barium	ppm	ASTM D5185m		<b>0</b>	0	0
Molybdenum	ppm	ASTM D5185m		<b>2</b>	3	<1
Manganese	ppm	ASTM D5185m		<b>0</b>	<1	0
Magnesium	ppm	ASTM D5185m	9	<b>33</b>	48	7
Calcium	ppm	ASTM D5185m	4500	<b>3016</b>	2934	2817
Phosphorus	ppm	ASTM D5185m	1150	<b>843</b>	908	876
Zinc	ppm	ASTM D5185m	1250	<b>943</b>	1063	1050
Sulfur	ppm	ASTM D5185m	4500	<b>4499</b>	4009	4524
Acid Number (AN)	mg KOH/g	ASTM D8045	0.28	<b>0.98</b>	0.92	0.56
Visc @ 40°C	cSt	ASTM D445	108	<b>102</b>	99.8	106
Visc @ 100°C	cSt	ASTM D445	11.6	<b>11.5</b>	11.5	11.7
Viscosity Index (VI)	Scale	ASTM D2270	94	<b>99</b>	102	97

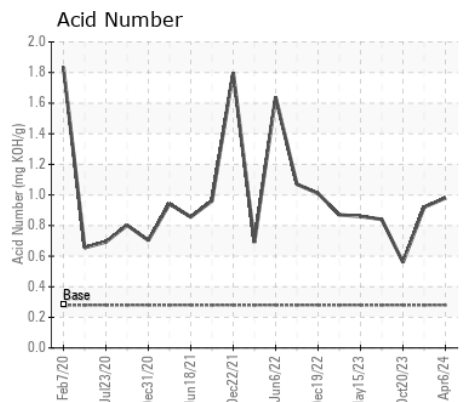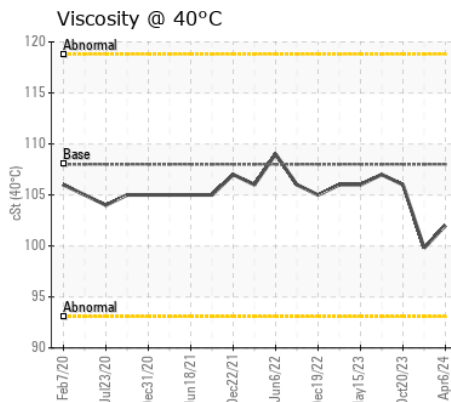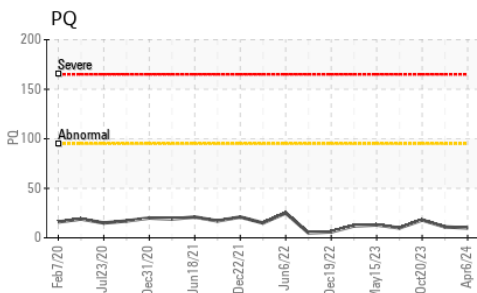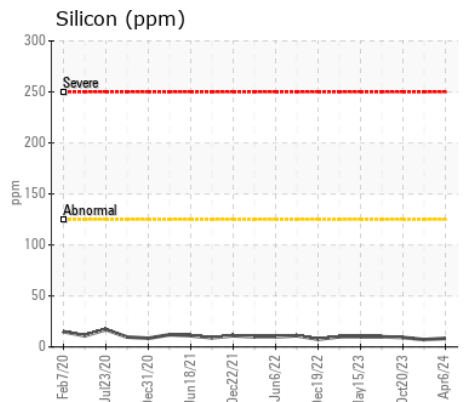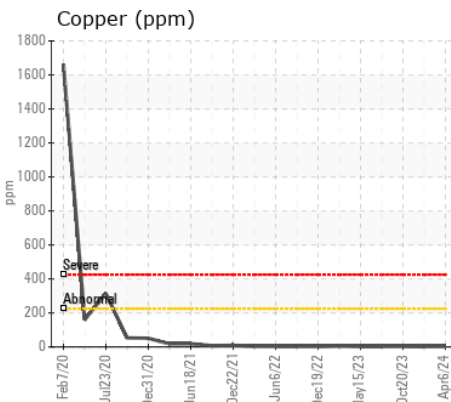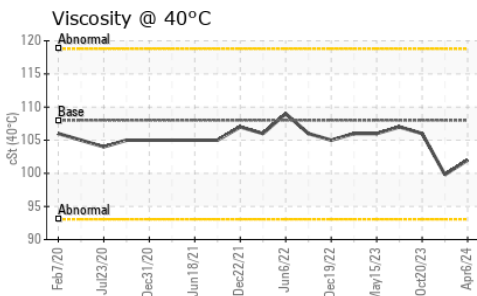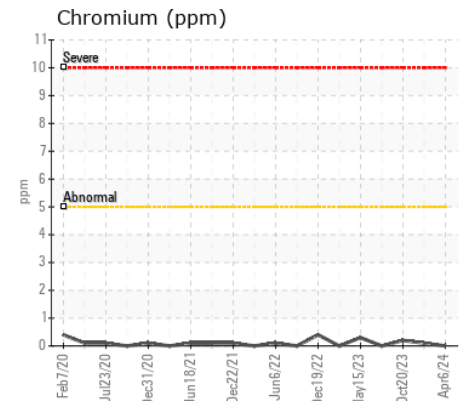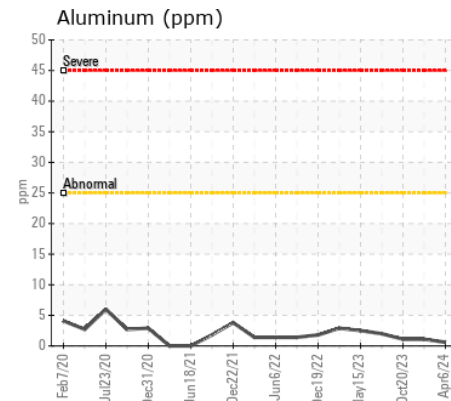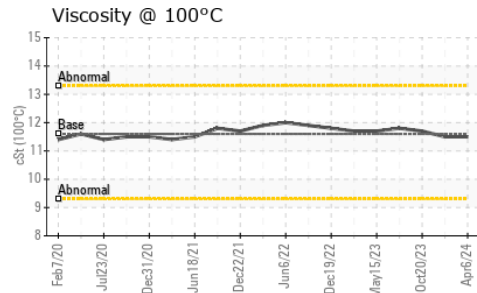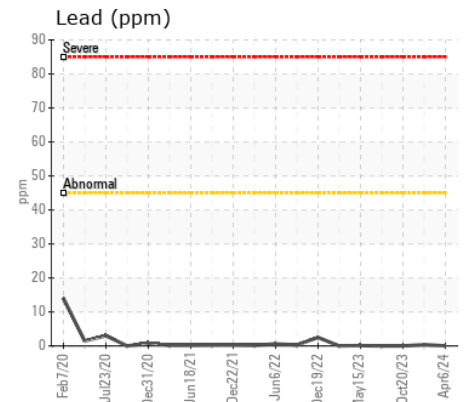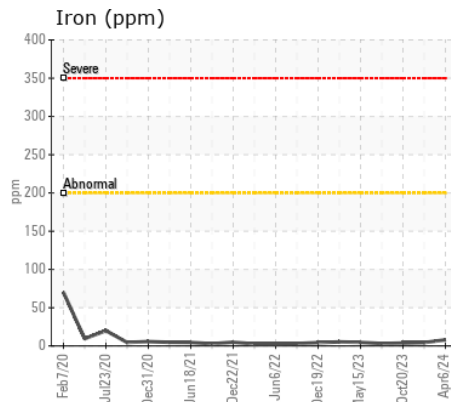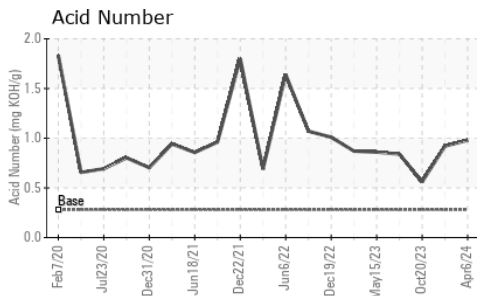

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513

Sample No. : TO10003318

Lab Number : 06149575

Unique Number : 10979653

Test Package : MOB 2 ( Additional Tests: KV100, PQ, VI )

Received : 15 Apr 2024

Tested : 16 Apr 2024

Diagnosed : 16 Apr 2024 - Wes Davis

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

**ANCHOR STONE TULSA ROCK**

TULSA ROCK QUARRY, 66TH ST N 145TH AVENUE

TULSA, OK

US 74137

Contact: MIKE SNYDER

msnyder@anchorstoneco.com

T: (417)850-9635

F: