



WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Machine Id
JOHN DEERE 650P 1T0650PAVPLX05080

Component
Right Final Drive
Fluid
{not provided} (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor. Please specify the brand, type, and viscosity of the oil on your next sample.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		JR0206251	JR0206677	---
Sample Date		Client Info		11 Apr 2024	11 Apr 2024	---
Machine Age	hrs	Client Info		465	465	---
Oil Age	hrs	Client Info		465	465	---
Filter Age	hrs	Client Info		0	0	---
Oil Changed		Client Info		Not Changd	Not Changd	---
Filter Changed		Client Info		N/A	N/A	---
Sample Status				NORMAL	NORMAL	---

WEAR

All component wear rates are normal.

PQ		ASTM D8184		110	53	---
Iron	ppm	ASTM D5185m	>500	126	70	---
Chromium	ppm	ASTM D5185m	>10	2	2	---
Nickel	ppm	ASTM D5185m	>10	<1	<1	---
Titanium	ppm	ASTM D5185m		<1	<1	---
Silver	ppm	ASTM D5185m		0	0	---
Aluminum	ppm	ASTM D5185m	>25	12	3	---
Lead	ppm	ASTM D5185m	>25	0	<1	---
Copper	ppm	ASTM D5185m	>50	<1	1	---
Tin	ppm	ASTM D5185m	>10	<1	<1	---
Vanadium	ppm	ASTM D5185m		0	<1	---
White Metal	scalar	*Visual	NONE	NONE	NONE	---
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	---

CONTAMINATION







There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>75	40	11	---
Potassium	ppm	ASTM D5185m	>20	1	2	---
Water		WC Method	>0.2	NEG	NEG	---
Silt	scalar	*Visual	NONE	NONE	NONE	---
Debris	scalar	*Visual	NONE	NONE	NONE	---
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	NORML	---
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG	---

FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185m		3	1	---
Boron	ppm	ASTM D5185m		1	<1	---
Barium	ppm	ASTM D5185m		3	4	---
Molybdenum	ppm	ASTM D5185m		<1	1	---
Manganese	ppm	ASTM D5185m		4	4	---
Magnesium	ppm	ASTM D5185m		96	112	---
Calcium	ppm	ASTM D5185m		3185	3666	---
Phosphorus	ppm	ASTM D5185m		933	1119	---
Zinc	ppm	ASTM D5185m		1077	1327	---
Sulfur	ppm	ASTM D5185m		3794	3996	---
Visc @ 40°C	cSt	ASTM D445		52.6	52.5	---

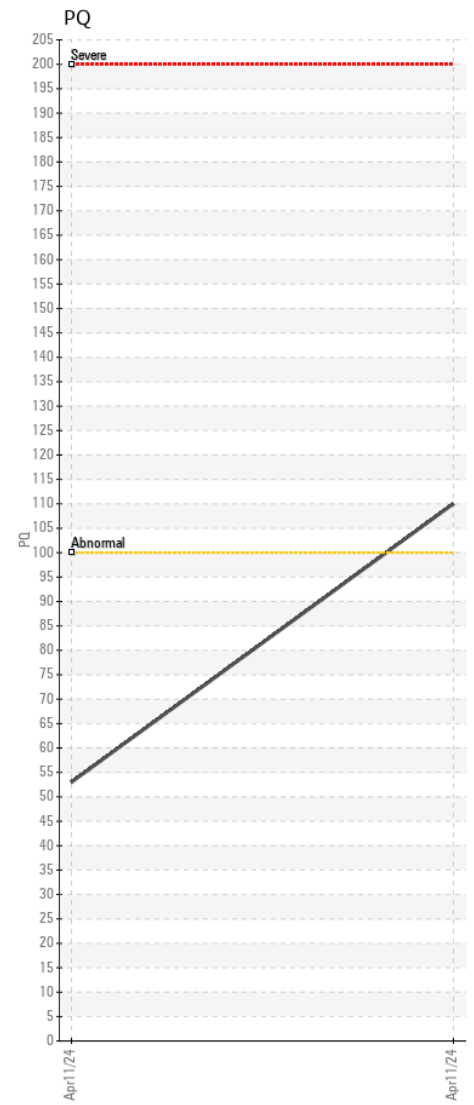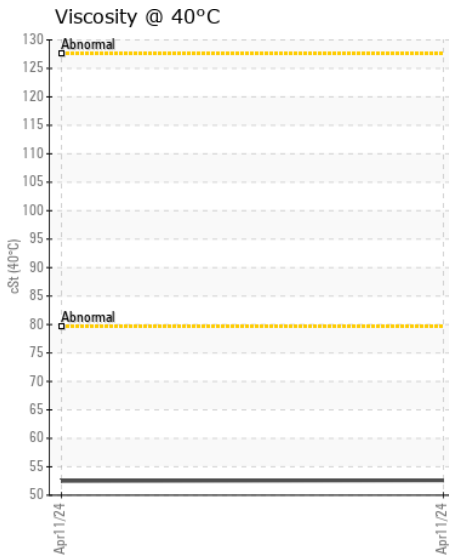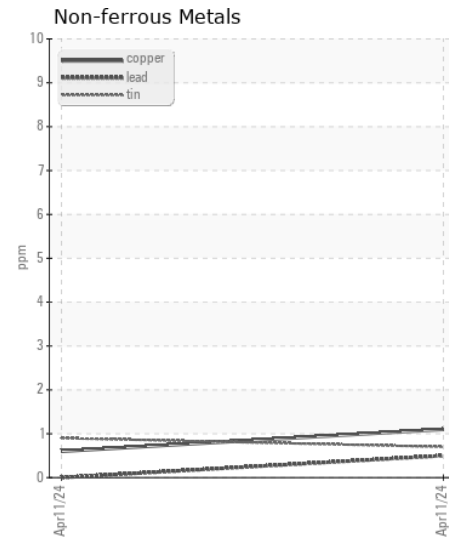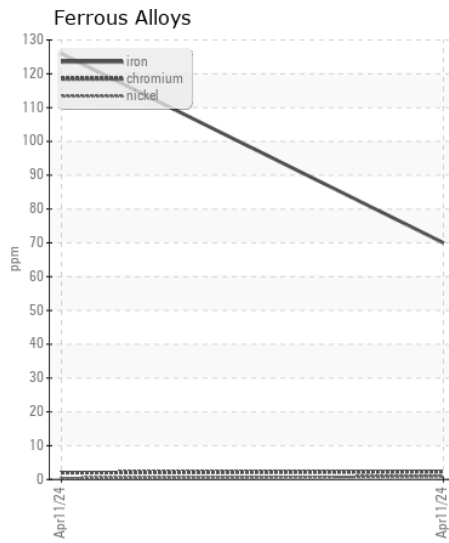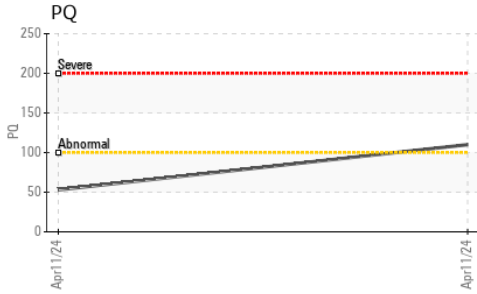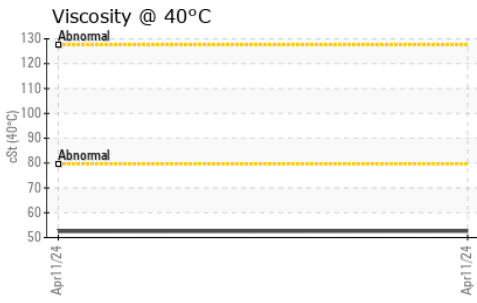

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : JR0206251 **Received** : 15 Apr 2024
Lab Number : 06149620 **Tested** : 16 Apr 2024
Unique Number : 10979698 **Diagnosed** : 18 Apr 2024 - Sean Felton
Test Package : CONST (Additional Tests: PQ)

JRE - CHARLOTTE
 9550 STATESVILLE ROAD
 CHARLOTTE, NC
 US 28269

Contact: CHARLOTTE SHOP
 myoung@jamesriverequipment.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T: (704)597-0211
 F: (704)596-6198