



WEAR  
CONTAMINATION  
FLUID CONDITION

**SEVERE**

**SEVERE**

**NORMAL**



Machine Id  
**JOHN DEERE 130G 1FF130GXHKF042303**  
Component  
**Right Final Drive**  
Fluid  
**JOHN DEERE GL-5 80W90 (--- GAL)**

### RECOMMENDATION

We advise that you check all areas where dirt can enter the system. The oil change at the time of sampling has been noted. We advise that you inspect for the source(s) of wear. We recommend an early resample to monitor this condition.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		<b>JR0211105</b>	JR0037907	---
Sample Date		Client Info		<b>11 Apr 2024</b>	19 Mar 2020	---
Machine Age	hrs	Client Info		<b>3831</b>	564	---
Oil Age	hrs	Client Info		<b>3831</b>	564	---
Filter Age	hrs	Client Info		<b>0</b>	0	---
Oil Changed		Client Info		<b>Changed</b>	Not Changd	---
Filter Changed		Client Info		<b>None</b>	N/A	---
Sample Status				<b>SEVERE</b>	ABNORMAL	---

### WEAR

Gear wear is indicated.

PQ		ASTM D8184	>1250	<b>▲ 1374</b>	247	---
Iron	ppm	ASTM D5185m	>750	<b>▲ 7250</b>	290	---
Chromium	ppm	ASTM D5185m	>9	<b>▲ 63</b>	4	---
Nickel	ppm	ASTM D5185m	>10	<b>▲ 26</b>	2	---
Titanium	ppm	ASTM D5185m		<b>▲ 53</b>	4	---
Silver	ppm	ASTM D5185m		<b>0</b>	0	---
Aluminum	ppm	ASTM D5185m	>40	<b>● 394</b>	● 39	---
Lead	ppm	ASTM D5185m	>15	<b>&lt;1</b>	0	---
Copper	ppm	ASTM D5185m	>40	<b>18</b>	<1	---
Tin	ppm	ASTM D5185m	>10	<b>1</b>	0	---
Vanadium	ppm	ASTM D5185m		<b>1</b>	<1	---
White Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	---
Yellow Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	---

### CONTAMINATION










Elemental levels of silicon (Si) and aluminum (Al) indicate alumina-silicate (coarse dirt) ingress.

Silicon	ppm	ASTM D5185m	>75	<b>▲ 2560</b>	▲ 221	---
Potassium	ppm	ASTM D5185m	>20	<b>116</b>	14	---
Water		WC Method	>0.075	<b>NEG</b>	NEG	---
Silt	scalar	*Visual	NONE	<b>NONE</b>	NONE	---
Debris	scalar	*Visual	NONE	<b>NONE</b>	▲ MODER	---
Sand/Dirt	scalar	*Visual	NONE	<b>NONE</b>	NONE	---
Appearance	scalar	*Visual	NORML	<b>NORML</b>	NORML	---
Odor	scalar	*Visual	NORML	<b>NORML</b>	NORML	---
Emulsified Water	scalar	*Visual	>0.075	<b>NEG</b>	NEG	---

### FLUID CONDITION

The oil is no longer serviceable due to the presence of contaminants.

Sodium	ppm	ASTM D5185m	>51	<b>29</b>	3	---
Boron	ppm	ASTM D5185m		<b>73</b>	50	---
Barium	ppm	ASTM D5185m		<b>10</b>	6	---
Molybdenum	ppm	ASTM D5185m		<b>6</b>	0	---
Manganese	ppm	ASTM D5185m		<b>63</b>	5	---
Magnesium	ppm	ASTM D5185m		<b>39</b>	4	---
Calcium	ppm	ASTM D5185m		<b>66</b>	10	---
Phosphorus	ppm	ASTM D5185m		<b>418</b>	434	---
Zinc	ppm	ASTM D5185m		<b>57</b>	27	---
Sulfur	ppm	ASTM D5185m		<b>43936</b>	10530	---
Visc @ 40°C	cSt	ASTM D445		<b>249</b>	186	---

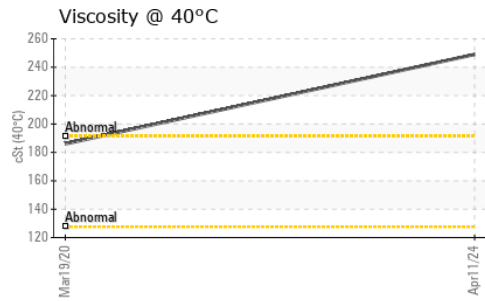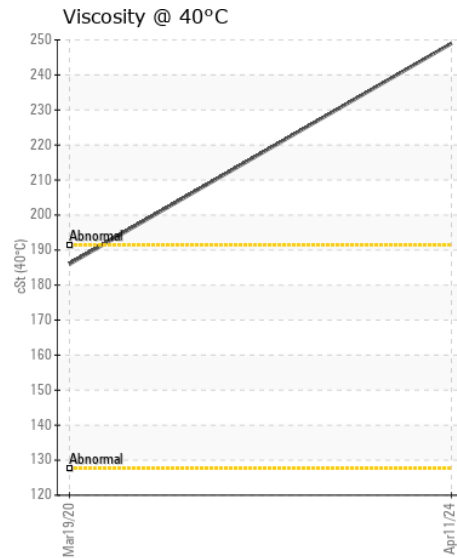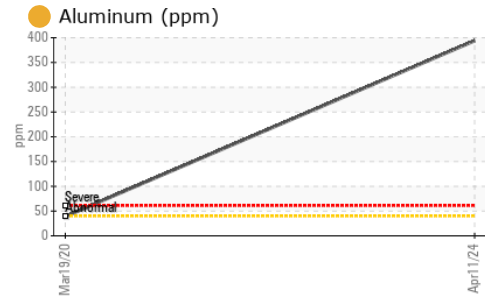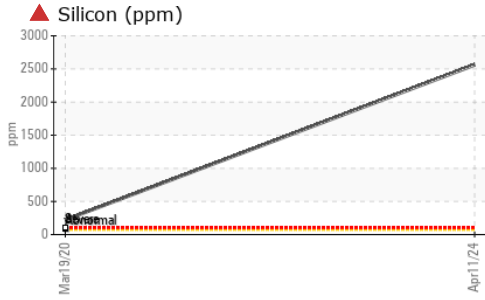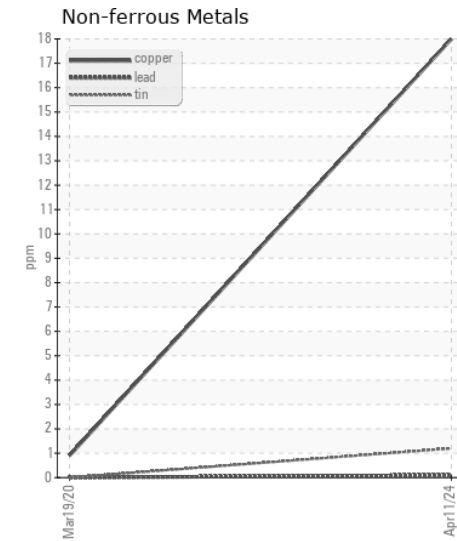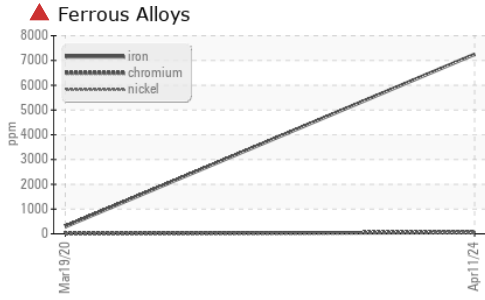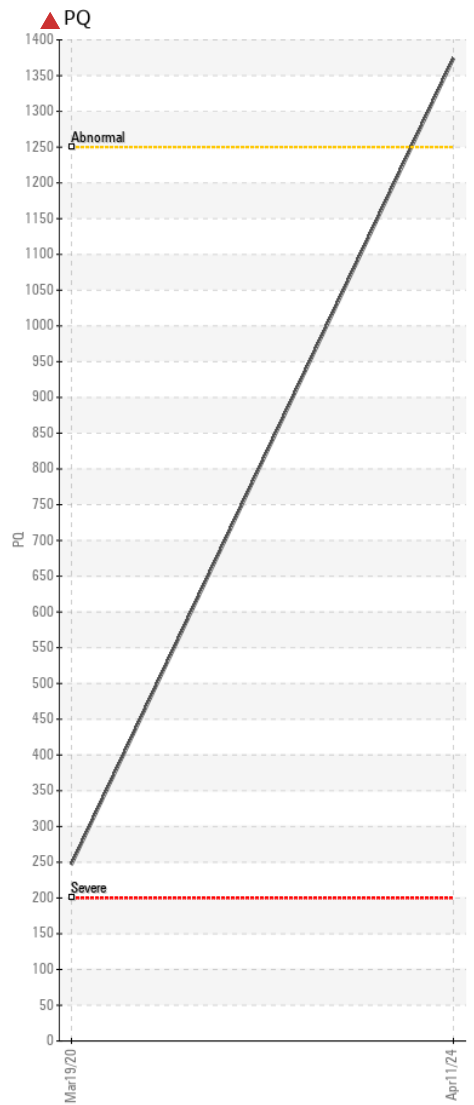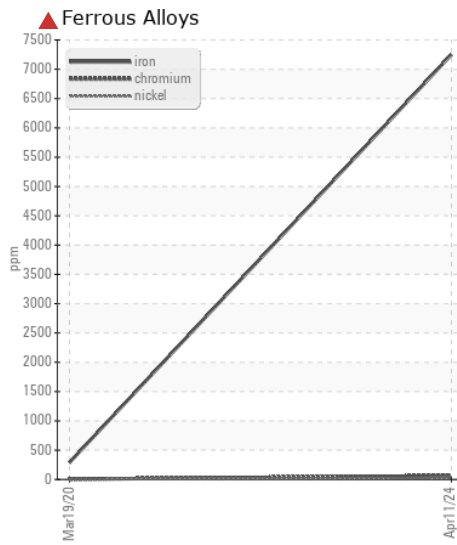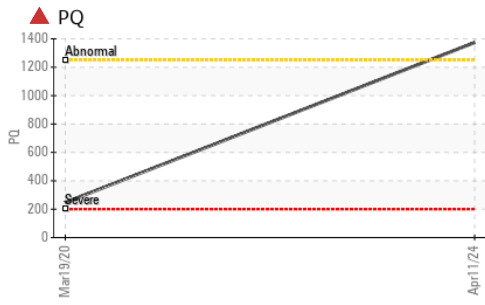

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : JR0211105 **Received** : 15 Apr 2024  
**Lab Number** : 06149665 **Tested** : 16 Apr 2024  
**Unique Number** : 10979743 **Diagnosed** : 18 Apr 2024 - Jonathan Hester  
**Test Package** : CONST ( Additional Tests: PQ )

**JRE - MANASSAS PARK**  
 9107 OWENS DRIVE  
 MANASSAS PARK, VA  
 US 20111  
 Contact: DON VEST  
 dvest@jamesriverequipment.com  
 T: (703)631-8500  
 F: (703)631-4715

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)