



WEAR	<b>NORMAL</b>
CONTAMINATION	<b>NORMAL</b>
FLUID CONDITION	<b>NORMAL</b>



Area  
**[05W46080]**  
 Machine Id  
**JOHN DEERE 160G 1FF160GXPKF057672**  
 Component  
**Swing Drive**  
 Fluid  
**JOHN DEERE GL-5 80W90 (6 QTS)**

### RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		<b>JR0211161</b>	JR0037879	---
Sample Date		Client Info		<b>11 Apr 2024</b>	19 Mar 2020	---
Machine Age	hrs	Client Info		<b>4338</b>	487	---
Oil Age	hrs	Client Info		<b>4338</b>	487	---
Filter Age	hrs	Client Info		<b>0</b>	0	---
Oil Changed		Client Info		<b>Changed</b>	Not Changd	---
Filter Changed		Client Info		<b>N/A</b>	N/A	---
Sample Status				<b>NORMAL</b>	NORMAL	---

### WEAR

All component wear rates are normal.

PQ		ASTM D8184		<b>23</b>	42	---
Iron	ppm	ASTM D5185m	>151	<b>70</b>	43	---
Chromium	ppm	ASTM D5185m	>11	<b>&lt;1</b>	1	---
Nickel	ppm	ASTM D5185m	>10	<b>0</b>	0	---
Titanium	ppm	ASTM D5185m		<b>&lt;1</b>	<1	---
Silver	ppm	ASTM D5185m		<b>0</b>	0	---
Aluminum	ppm	ASTM D5185m	>21	<b>&lt;1</b>	<1	---
Lead	ppm	ASTM D5185m	>51	<b>0</b>	0	---
Copper	ppm	ASTM D5185m	>51	<b>&lt;1</b>	<1	---
Tin	ppm	ASTM D5185m	>10	<b>&lt;1</b>	0	---
Vanadium	ppm	ASTM D5185m		<b>0</b>	0	---
White Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	---
Yellow Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	---

### CONTAMINATION







There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>31	<b>24</b>	19	---
Potassium	ppm	ASTM D5185m	>20	<b>2</b>	2	---
Water		WC Method	>0.1	<b>NEG</b>	NEG	---
Silt	scalar	*Visual	NONE	<b>NONE</b>	NONE	---
Debris	scalar	*Visual	NONE	<b>NONE</b>	NONE	---
Sand/Dirt	scalar	*Visual	NONE	<b>NONE</b>	NONE	---
Appearance	scalar	*Visual	NORML	<b>NORML</b>	NORML	---
Odor	scalar	*Visual	NORML	<b>NORML</b>	NORML	---
Emulsified Water	scalar	*Visual	>0.1	<b>NEG</b>	NEG	---

### FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185m	>51	<b>3</b>	<1	---
Boron	ppm	ASTM D5185m		<b>81</b>	63	---
Barium	ppm	ASTM D5185m		<b>5</b>	4	---
Molybdenum	ppm	ASTM D5185m		<b>0</b>	0	---
Manganese	ppm	ASTM D5185m		<b>2</b>	2	---
Magnesium	ppm	ASTM D5185m		<b>&lt;1</b>	0	---
Calcium	ppm	ASTM D5185m		<b>10</b>	8	---
Phosphorus	ppm	ASTM D5185m		<b>545</b>	438	---
Zinc	ppm	ASTM D5185m		<b>0</b>	5	---
Sulfur	ppm	ASTM D5185m		<b>17885</b>	10314	---
Visc @ 40°C	cSt	ASTM D445		<b>184</b>	184	---

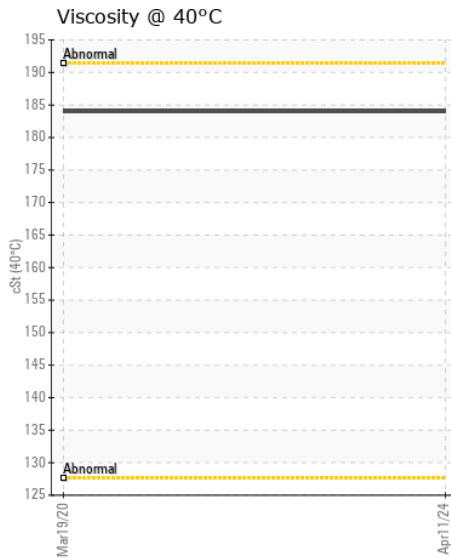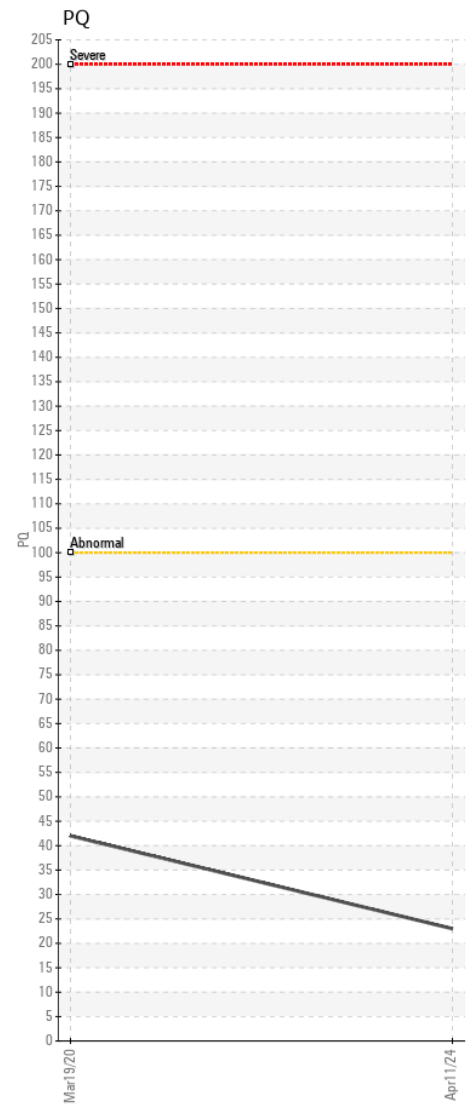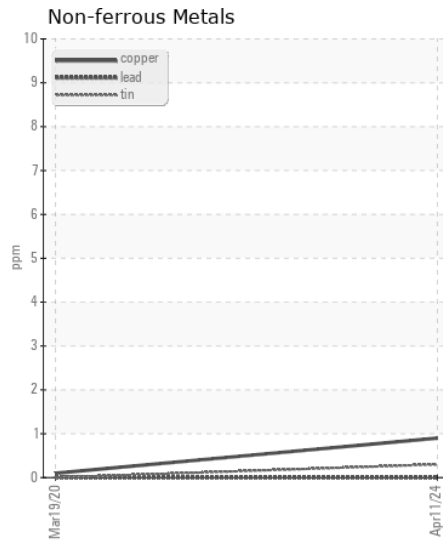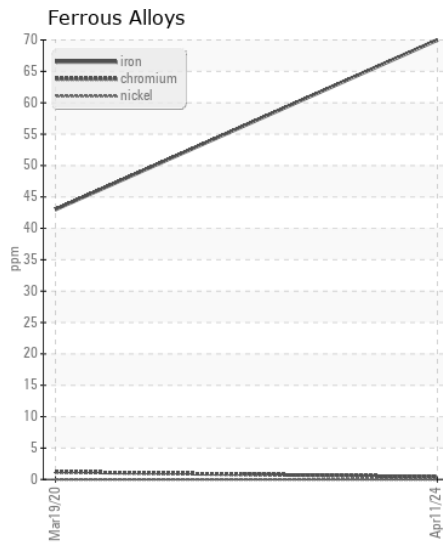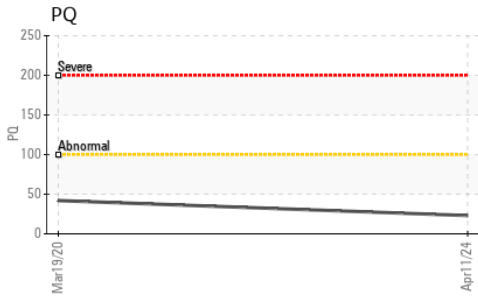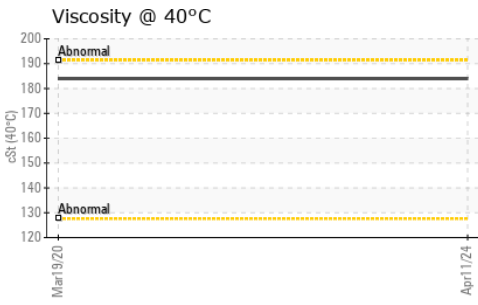

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : JR0211161 **Received** : 15 Apr 2024  
**Lab Number** : 06149668 **Tested** : 19 Apr 2024  
**Unique Number** : 10979746 **Diagnosed** : 19 Apr 2024 - Jonathan Hester  
**Test Package** : CONST ( Additional Tests: PQ )

**JRE - MANASSAS PARK**  
 9107 OWENS DRIVE  
 MANASSAS PARK, VA  
 US 20111

Contact: DON VEST  
 dvest@jamesriverequipment.com  
 T: (703)631-8500  
 F: (703)631-4715

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)