



WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL



Area
KEMP QUARRIES / PRYOR STONE [69258]
Machine Id
WL137
Component
Rear Left Final Drive
Fluid
PETRO CANADA PRODURO TO-4 SAE 50 (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor. (Customer Sample Comment: Pm3 performed. All oil samples taken. Engine oil, engine oil filters, fuel filters, air filters, and cabin air filters changed.)

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		PCA0086633	PCA0084403	PCA0086229
Sample Date		Client Info		02 Apr 2024	16 Dec 2023	06 Oct 2023
Machine Age	hrs	Client Info		33333	32690	32269
Oil Age	hrs	Client Info		1548	905	484
Filter Age	hrs	Client Info		0	0	0
Oil Changed		Client Info		Oil Added	Oil Added	Oil Added
Filter Changed		Client Info		N/A	N/A	N/A
Sample Status				NORMAL	NORMAL	NORMAL

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>800	11	4	4
Chromium	ppm	ASTM D5185m	>10	<1	0	0
Nickel	ppm	ASTM D5185m	>5	<1	0	0
Titanium	ppm	ASTM D5185m	>15	<1	0	0
Silver	ppm	ASTM D5185m	>2	0	0	0
Aluminum	ppm	ASTM D5185m	>75	3	1	1
Lead	ppm	ASTM D5185m	>10	<1	<1	<1
Copper	ppm	ASTM D5185m	>75	1	1	<1
Tin	ppm	ASTM D5185m	>8	<1	<1	<1
Vanadium	ppm	ASTM D5185m		<1	0	0
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE

CONTAMINATION










There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>400	12	10	11
Potassium	ppm	ASTM D5185m	>20	1	0	<1
Water		WC Method	>0.2	NEG	NEG	NEG
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG	NEG

FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185m		1	<1	0
Boron	ppm	ASTM D5185m	2	0	<1	0
Barium	ppm	ASTM D5185m	0	<1	0	0
Molybdenum	ppm	ASTM D5185m	0	2	0	<1
Manganese	ppm	ASTM D5185m	0	<1	<1	0
Magnesium	ppm	ASTM D5185m	9	12	12	0
Calcium	ppm	ASTM D5185m	3114	3661	3377	3694
Phosphorus	ppm	ASTM D5185m	1099	936	905	1015
Zinc	ppm	ASTM D5185m	1245	1163	1108	1318
Sulfur	ppm	ASTM D5185m	7086	4600	4227	4940
Visc @ 40°C	cSt	ASTM D445	213.9	201	198	203

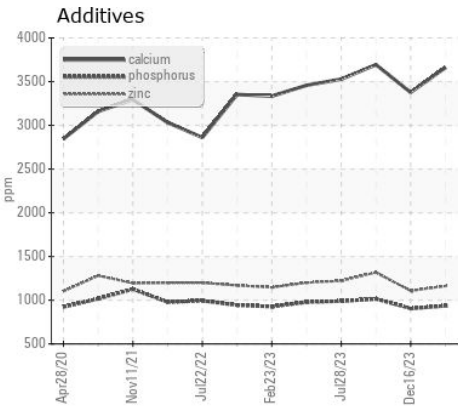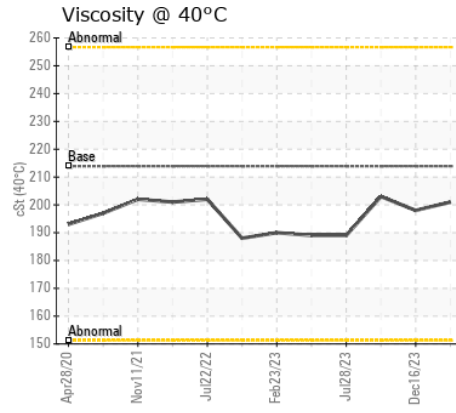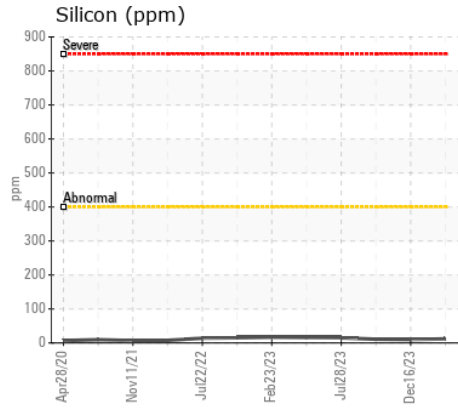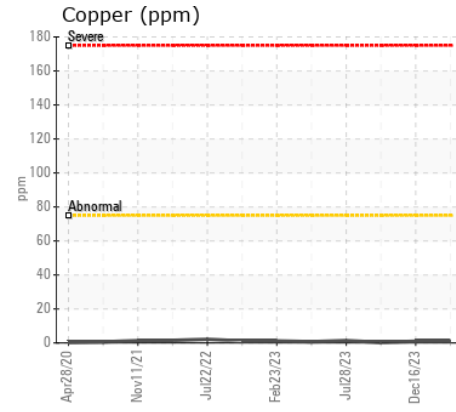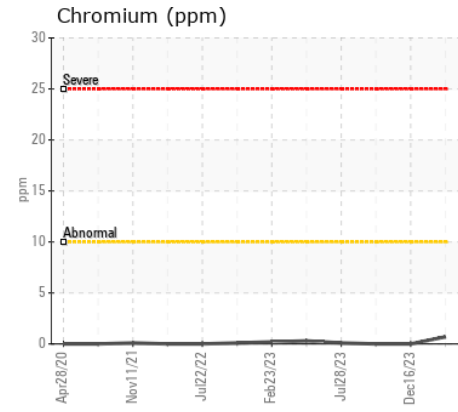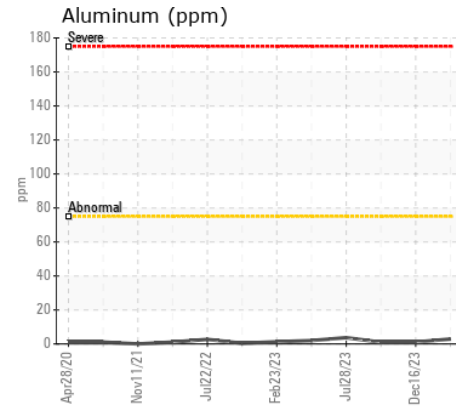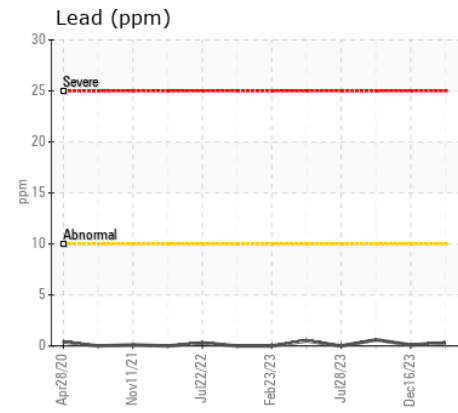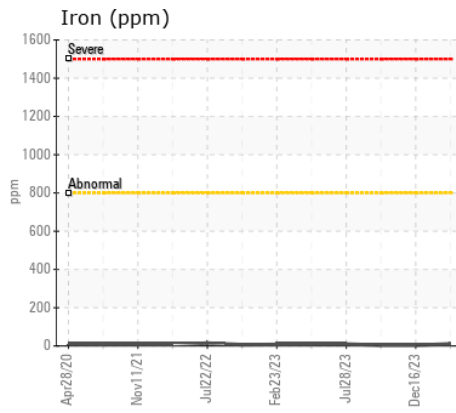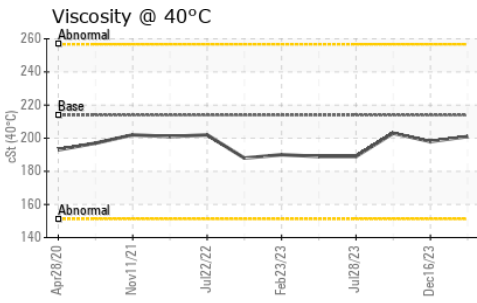

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : PCA0086633
Lab Number : 06149710
Unique Number : 10979788
Test Package : MOB 1

Received : 15 Apr 2024
Tested : 16 Apr 2024
Diagnosed : 18 Apr 2024 - Don Baldrige

Kemp Quarries - Pryor Stone - Pryor
 1050 E 520 Rd
 Pryor, OK
 US 74361
 Contact:
 pryor@pryorstone.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)