



PacLease

OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Machine Id
857-4221
 Component
Diesel Engine
 Fluid
CHEVRON DELO 400 SAE 10W30 (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		RPL0014291	RPL0004848	---
Sample Date		Client Info		05 Mar 2024	12 Oct 2022	---
Machine Age	hrs	Client Info		6855	4754	---
Oil Age	hrs	Client Info		0	0	---
Filter Age	hrs	Client Info		0	0	---
Oil Changed		Client Info		Not Chngd	Changed	---
Filter Changed		Client Info		Changed	Changed	---
Sample Status				NORMAL	NORMAL	---

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>100	14	20	---
Chromium	ppm	ASTM D5185m	>20	<1	<1	---
Nickel	ppm	ASTM D5185m	>4	<1	0	---
Titanium	ppm	ASTM D5185m		<1	<1	---
Silver	ppm	ASTM D5185m	>3	0	0	---
Aluminum	ppm	ASTM D5185m	>20	3	4	---
Lead	ppm	ASTM D5185m	>40	<1	0	---
Copper	ppm	ASTM D5185m	>330	<1	<1	---
Tin	ppm	ASTM D5185m	>15	<1	<1	---
Vanadium	ppm	ASTM D5185m		<1	0	---
White Metal	scalar	*Visual	NONE	NONE	NONE	---
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	---

CONTAMINATION








There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>25	7	8	---
Potassium	ppm	ASTM D5185m	>20	4	11	---
Fuel		WC Method	>5	<1.0	<1.0	---
Water		WC Method	>0.2	NEG	NEG	---
Glycol		WC Method		NEG	NEG	---
Soot %	%	*ASTM D7844	>3	0.2	0.2	---
Nitration	Abs/cm	*ASTM D7624	>20	8.9	11.5	---
Sulfation	Abs/.1mm	*ASTM D7415	>30	21.3	24.2	---
Silt	scalar	*Visual	NONE	NONE	NONE	---
Debris	scalar	*Visual	NONE	NONE	NONE	---
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	NORML	---
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG	---

FLUID CONDITION

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m		2	4	---
Boron	ppm	ASTM D5185m		36	23	---
Barium	ppm	ASTM D5185m		1	0	---
Molybdenum	ppm	ASTM D5185m		55	12	---
Manganese	ppm	ASTM D5185m		<1	<1	---
Magnesium	ppm	ASTM D5185m		469	715	---
Calcium	ppm	ASTM D5185m		1838	1456	---
Phosphorus	ppm	ASTM D5185m	1260	778	730	---
Zinc	ppm	ASTM D5185m	1400	952	834	---
Sulfur	ppm	ASTM D5185m		2543	3447	---
Oxidation	Abs/.1mm	*ASTM D7414	>25	20.7	20.3	---
Base Number (BN)	mg KOH/g	ASTM D2896	10.1	9.1	6.5	---
Visc @ 100°C	cSt	ASTM D445	11.1	10.9	11.4	---

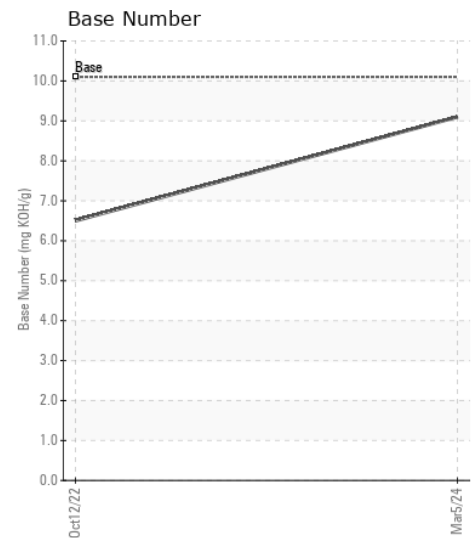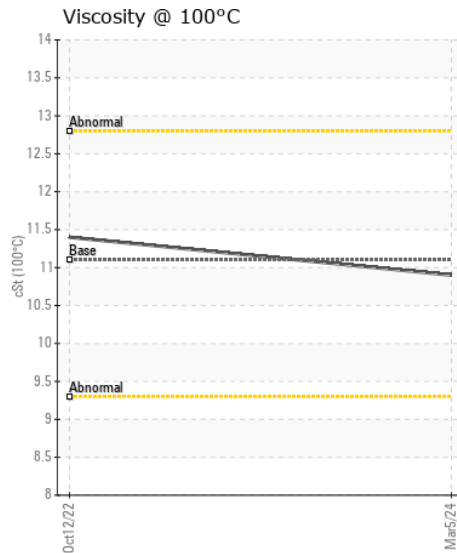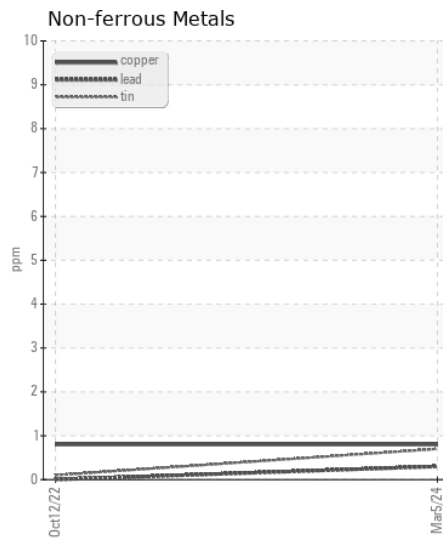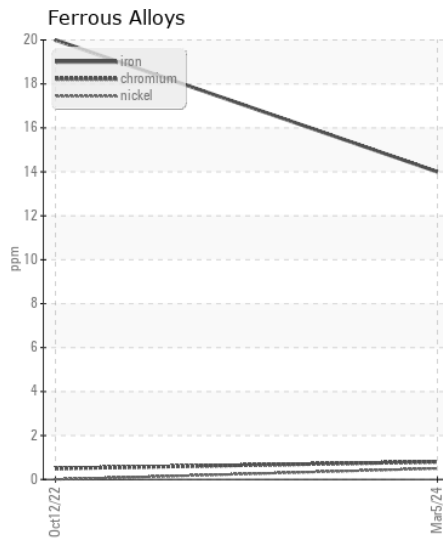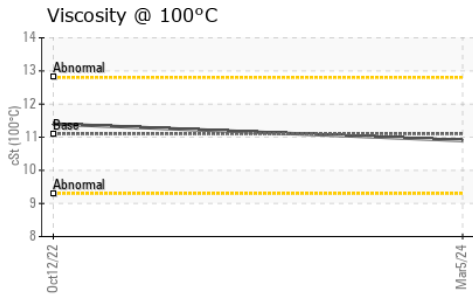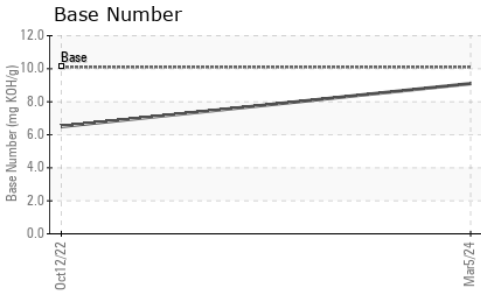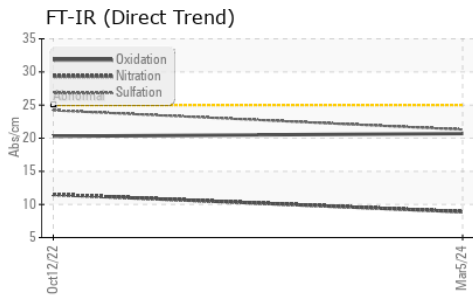

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513

Sample No. : RPL0014291

Lab Number : 06149781

Unique Number : 10979859

Test Package : FLEET

Received : 16 Apr 2024

Tested : 17 Apr 2024

Diagnosed : 18 Apr 2024 - Don Baldrige

RTL PACLEASE - 7001 - Houston

6300 N. Loop East

Houston, TX

US 77026

Contact: RODNEY BRIGGS

briggsr@rushenterprises.com

T:

F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)