



PacLease

OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Machine Id
857-4746
 Component
Diesel Engine
 Fluid
CHEVRON DELO 400 XLE 10W30 (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor. Please specify the component make and model with your next sample.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		RPL0014356	RPL0010178	---
Sample Date		Client Info		29 Feb 2024	30 Jun 2023	---
Machine Age	hrs	Client Info		6439	113042	---
Oil Age	hrs	Client Info		1283	46054	---
Filter Age	hrs	Client Info		1283	46054	---
Oil Changed		Client Info		Changed	Changed	---
Filter Changed		Client Info		Changed	Changed	---
Sample Status				NORMAL	NORMAL	---

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>100	28	66	---
Chromium	ppm	ASTM D5185m	>20	2	2	---
Nickel	ppm	ASTM D5185m	>4	1	<1	---
Titanium	ppm	ASTM D5185m		<1	<1	---
Silver	ppm	ASTM D5185m	>3	<1	0	---
Aluminum	ppm	ASTM D5185m	>20	6	16	---
Lead	ppm	ASTM D5185m	>40	7	5	---
Copper	ppm	ASTM D5185m	>330	2	7	---
Tin	ppm	ASTM D5185m	>15	2	2	---
Vanadium	ppm	ASTM D5185m		<1	0	---
White Metal	scalar	*Visual	NONE	NONE	NONE	---
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	---

CONTAMINATION









Test for glycol is negative. There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>25	8	13	---
Potassium	ppm	ASTM D5185m	>20	41	61	---
Fuel		WC Method	>5	<1.0	<1.0	---
Water		WC Method	>0.2	NEG	NEG	---
Glycol	%	*ASTM D2982		0.0	NEG	---
Soot %	%	*ASTM D7844	>3	0.4	0.8	---
Nitration	Abs/cm	*ASTM D7624	>20	10.7	12.3	---
Sulfation	Abs/.1mm	*ASTM D7415	>30	23.1	28.1	---
Silt	scalar	*Visual	NONE	NONE	NONE	---
Debris	scalar	*Visual	NONE	NONE	NONE	---
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	NORML	---
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG	---

FLUID CONDITION

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m		16	8	---
Boron	ppm	ASTM D5185m		27	14	---
Barium	ppm	ASTM D5185m		<1	0	---
Molybdenum	ppm	ASTM D5185m		11	21	---
Manganese	ppm	ASTM D5185m		1	1	---
Magnesium	ppm	ASTM D5185m		718	821	---
Calcium	ppm	ASTM D5185m	2900	1351	1669	---
Phosphorus	ppm	ASTM D5185m	1100	722	797	---
Zinc	ppm	ASTM D5185m	1200	810	949	---
Sulfur	ppm	ASTM D5185m	4000	2999	3719	---
Oxidation	Abs/.1mm	*ASTM D7414	>25	18.5	25.2	---
Base Number (BN)	mg KOH/g	ASTM D2896	10.3	5.6	4.2	---
Visc @ 100°C	cSt	ASTM D445	11.9	10.8	11.7	---

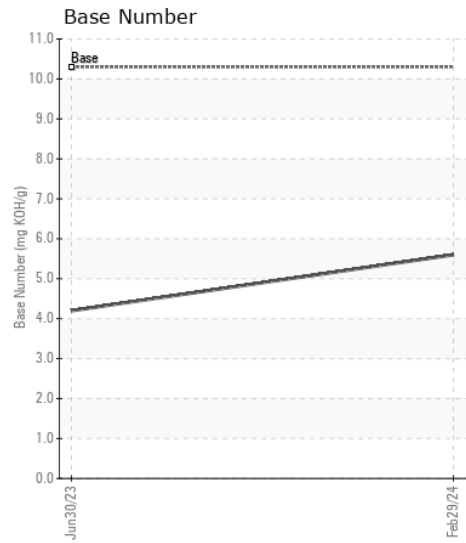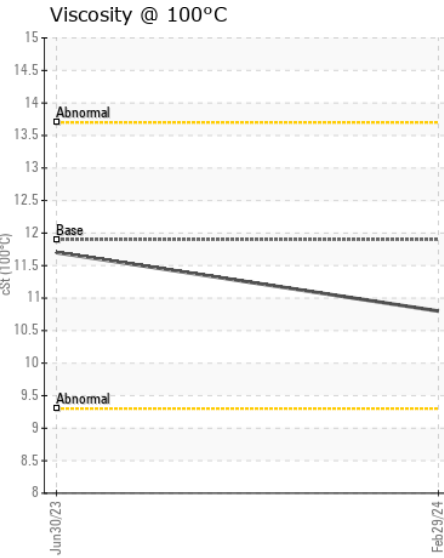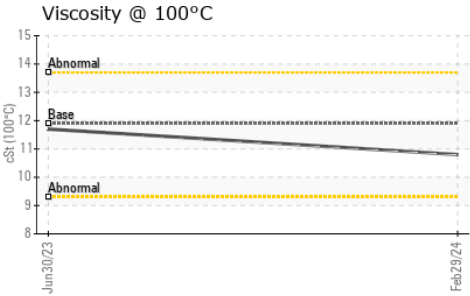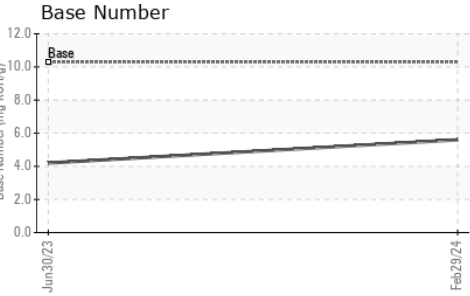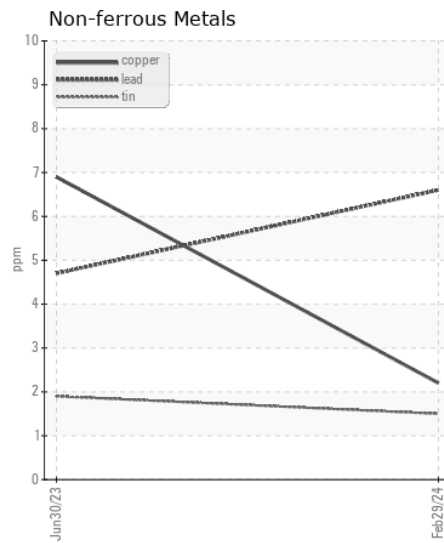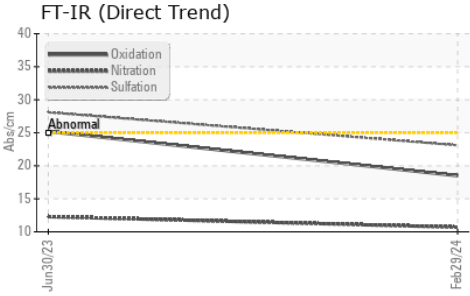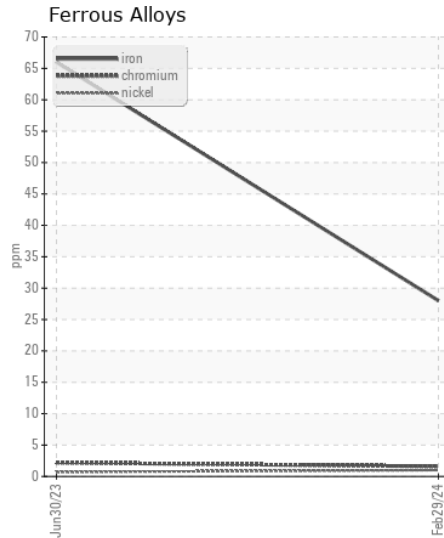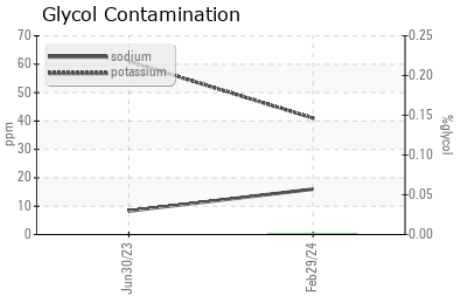

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : RPL0014356 **Received** : 16 Apr 2024
Lab Number : 06149910 **Tested** : 17 Apr 2024
Unique Number : 10979988 **Diagnosed** : 17 Apr 2024 - Wes Davis
Test Package : FLEET (Additional Tests: Glycol)

RTL PACLEASE - 7001 - Houston
 6300 N. Loop East
 Houston, TX
 US 77026
 Contact: RODNEY BRIGGS
 briggsr@rushenterprises.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:
F: