



OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Machine Id
6561
 Component
Diesel Engine
 Fluid
CITGO CITGUARD 600 15W40 (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		WC0891566	WC0891581	---
Sample Date		Client Info		12 Apr 2024	12 Feb 2024	---
Machine Age	mls	Client Info		689676	674593	---
Oil Age	mls	Client Info		15000	674593	---
Filter Age	mls	Client Info		15000	674593	---
Oil Changed		Client Info		N/A	Changed	---
Filter Changed		Client Info		N/A	Changed	---
Sample Status				NORMAL	NORMAL	---

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>100	6	6	---
Chromium	ppm	ASTM D5185m	>20	<1	<1	---
Nickel	ppm	ASTM D5185m	>4	0	0	---
Titanium	ppm	ASTM D5185m		0	0	---
Silver	ppm	ASTM D5185m	>3	0	0	---
Aluminum	ppm	ASTM D5185m	>20	2	1	---
Lead	ppm	ASTM D5185m	>40	0	<1	---
Copper	ppm	ASTM D5185m	>330	0	<1	---
Tin	ppm	ASTM D5185m	>15	<1	<1	---
Vanadium	ppm	ASTM D5185m		0	<1	---
White Metal	scalar	*Visual	NONE	NONE	NONE	---
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	---

CONTAMINATION

There is no indication of any contamination in the oil.


Silicon	ppm	ASTM D5185m	>25	5	5	---
Potassium	ppm	ASTM D5185m	>20	3	0	---
Fuel		WC Method	>5	<1.0	<1.0	---
Water		WC Method	>0.2	NEG	NEG	---
Glycol		WC Method		NEG	NEG	---
Soot %	%	*ASTM D7844	>3	0.3	0.2	---
Nitration	Abs/cm	*ASTM D7624	>20	8.0	6.7	---
Sulfation	Abs/.1mm	*ASTM D7415	>30	19.8	16.7	---
Silt	scalar	*Visual	NONE	NONE	NONE	---
Debris	scalar	*Visual	NONE	NONE	NONE	---
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	NORML	---
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG	---

FLUID CONDITION


The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m		2	<1	---
Boron	ppm	ASTM D5185m	13	24	42	---
Barium	ppm	ASTM D5185m	0	0	0	---
Molybdenum	ppm	ASTM D5185m	57	69	65	---
Manganese	ppm	ASTM D5185m		<1	0	---
Magnesium	ppm	ASTM D5185m	825	476	362	---
Calcium	ppm	ASTM D5185m	1100	1822	1700	---
Phosphorus	ppm	ASTM D5185m	933	1198	991	---
Zinc	ppm	ASTM D5185m	1089	1386	1187	---
Sulfur	ppm	ASTM D5185m	2769	4207	3161	---
Oxidation	Abs/.1mm	*ASTM D7414	>25	16.0	12.5	---
Base Number (BN)	mg KOH/g	ASTM D2896	11.0	8.3	7.3	---
Visc @ 100°C	cSt	ASTM D445	15.4	12.9	13.1	---


FT-IR (Direct Trend)

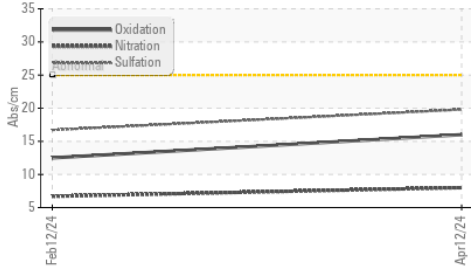


Ferrous Alloys

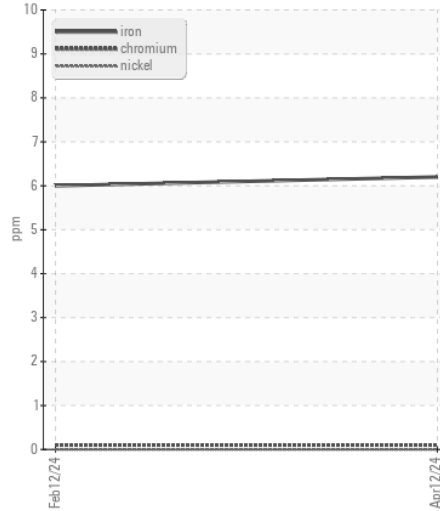


Base Number

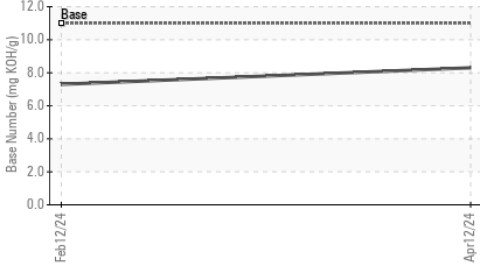


Non-ferrous Metals

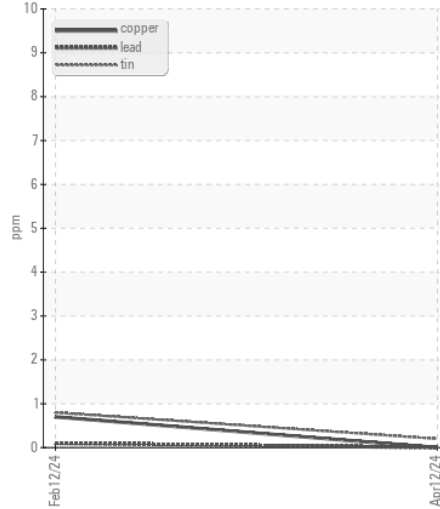


Viscosity @ 100°C

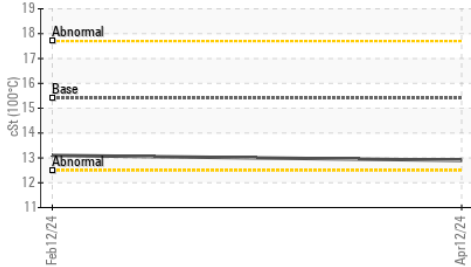

Viscosity @ 100°C

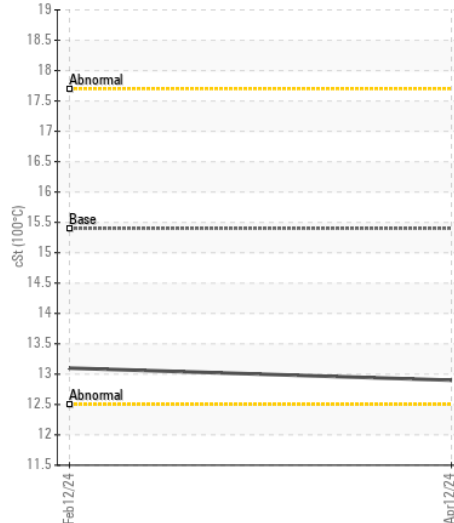

Base Number

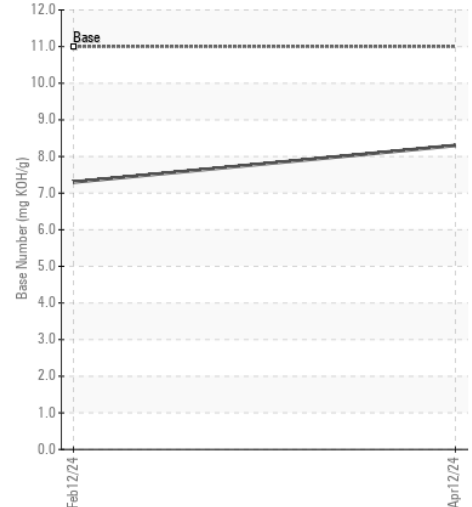

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : WC0891566
Lab Number : 06149966
Unique Number : 10980044
Test Package : FLEET

Received : 16 Apr 2024
Tested : 17 Apr 2024
Diagnosed : 17 Apr 2024 - Wes Davis

OMNISOURCE SE - JOHNSON CITY
 500 RAVINE DR
 JOHNSON CITY, TN
 US 37601

Contact: BRANDON IRISH
 brandon.irish@omnisource.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T: (423)928-1609
 F: (423)979-5922