



WEAR	ABNORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Machine Id
JOHN DEERE 1DW748LBPPL718824
 Component
Diesel Engine
 Fluid
JOHN DEERE ENGINE OIL PLUS 50 II 15W40 (28 QTS)

RECOMMENDATION

Oil and filter change at the time of sampling has been noted. No corrective action is recommended at this time. Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		JR0212000	JR0200558	---
Sample Date		Client Info		12 Apr 2024	28 Jan 2024	---
Machine Age	hrs	Client Info		1038	532	---
Oil Age	hrs	Client Info		0	532	---
Filter Age	hrs	Client Info		0	0	---
Oil Changed		Client Info		Changed	Changed	---
Filter Changed		Client Info		Changed	Changed	---
Sample Status				ABNORMAL	ABNORMAL	---

WEAR

The copper level has decreased, but is still abnormal. All other component wear rates are normal.

Iron	ppm	ASTM D5185m	>51	15	28	---
Chromium	ppm	ASTM D5185m	>11	<1	<1	---
Nickel	ppm	ASTM D5185m	>5	3	3	---
Titanium	ppm	ASTM D5185m		0	<1	---
Silver	ppm	ASTM D5185m	>3	0	0	---
Aluminum	ppm	ASTM D5185m	>31	3	6	---
Lead	ppm	ASTM D5185m	>26	<1	<1	---
Copper	ppm	ASTM D5185m	>26	▲ 135	▲ 270	---
Tin	ppm	ASTM D5185m	>4	2	2	---
Vanadium	ppm	ASTM D5185m		0	<1	---
White Metal	scalar	*Visual	NONE	NONE	NONE	---
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	---

CONTAMINATION










There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>22	7	11	---
Potassium	ppm	ASTM D5185m	>20	2	3	---
Fuel	%	ASTM D3524	>2.1	<1.0	0.4	---
Water		WC Method	>0.21	NEG	NEG	---
Glycol	%	*ASTM D2982		0.0	NEG	---
Soot %	%	*ASTM D7844	>3	0.5	0.4	---
Nitration	Abs/cm	*ASTM D7624	>20	8.3	8.6	---
Sulfation	Abs/.1mm	*ASTM D7415	>30	22.5	22.5	---
Silt	scalar	*Visual	NONE	NONE	NONE	---
Debris	scalar	*Visual	NONE	NONE	NONE	---
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	NORML	---
Emulsified Water	scalar	*Visual	>0.21	NEG	NEG	---

FLUID CONDITION

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m	>31	5	6	---
Boron	ppm	ASTM D5185m		183	193	---
Barium	ppm	ASTM D5185m		0	2	---
Molybdenum	ppm	ASTM D5185m		187	238	---
Manganese	ppm	ASTM D5185m		1	6	---
Magnesium	ppm	ASTM D5185m		670	783	---
Calcium	ppm	ASTM D5185m		1622	1373	---
Phosphorus	ppm	ASTM D5185m		837	891	---
Zinc	ppm	ASTM D5185m		1020	1102	---
Sulfur	ppm	ASTM D5185m		3275	2785	---
Oxidation	Abs/.1mm	*ASTM D7414	>25	16.0	16.6	---
Base Number (BN)	mg KOH/g	ASTM D2896	13.6	8.3	7.7	---
Visc @ 100°C	cSt	ASTM D445	15.4	12.8	● 10.5	---

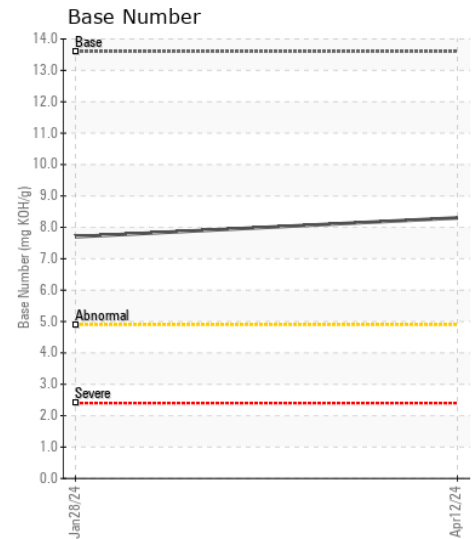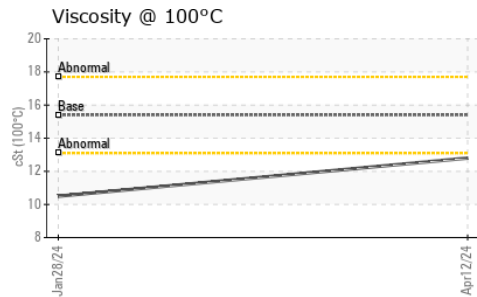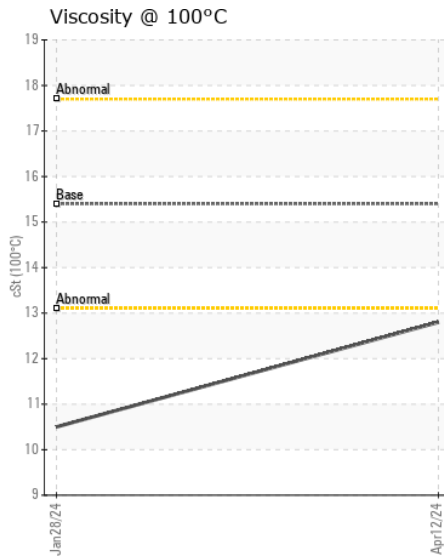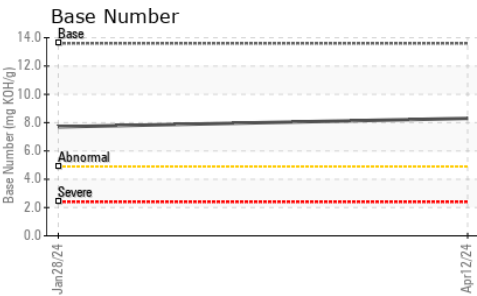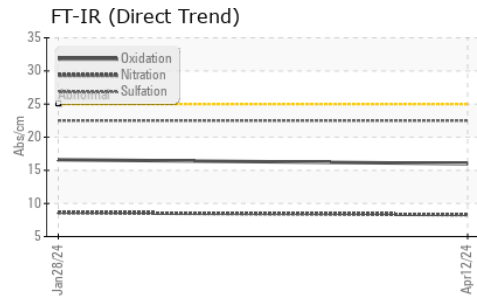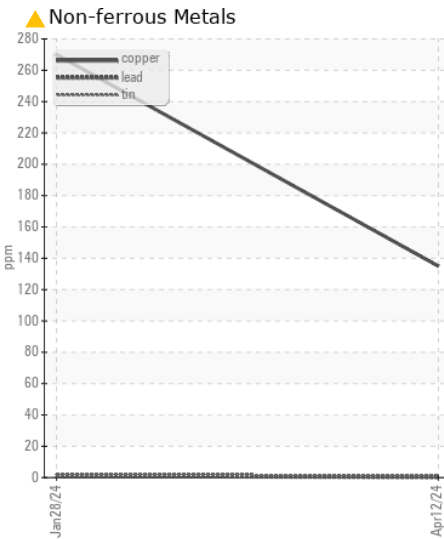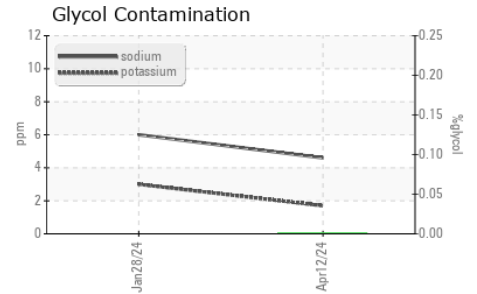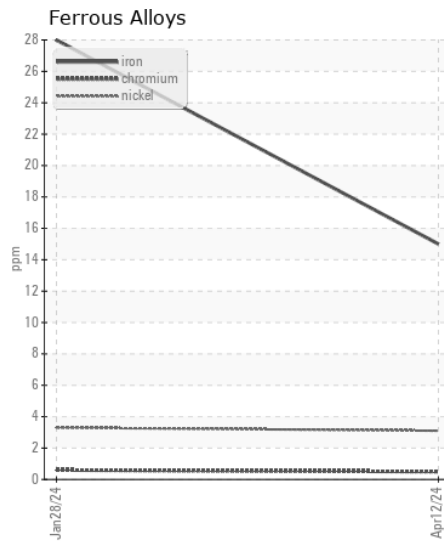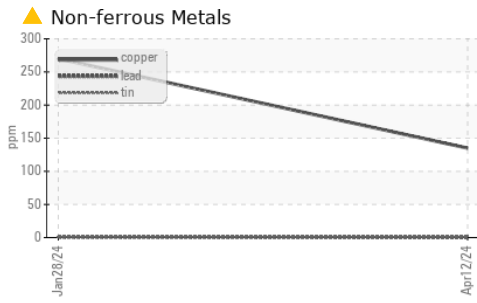

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : JR0212000 **Received** : 16 Apr 2024
Lab Number : 06150176 **Tested** : 17 Apr 2024
Unique Number : 10980254 **Diagnosed** : 18 Apr 2024 - Don Baldrige
Test Package : CONST (Additional Tests: FuelDilution, Glycol, TBN)

AMERICAN MATERIALS
P.O. BOX 16014
WICHITA, KS
US 67216
Contact: FRED THATALE

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:
F: