



WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Machine Id
JOHN DEERE 744L 1DW744LXKLF706607

Component
Hydraulic System

Fluid
JOHN DEERE HYDRAU (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		JR0199588	JR0164950	JR0147297
Sample Date		Client Info		08 Apr 2024	14 Aug 2023	23 Jan 2023
Machine Age	hrs	Client Info		2461	1938	1480
Oil Age	hrs	Client Info		2461	0	0
Filter Age	hrs	Client Info		2461	0	0
Oil Changed		Client Info		Not Chngd	Not Chngd	Not Chngd
Filter Changed		Client Info		Not Chngd	Not Chngd	Not Chngd
Sample Status				NORMAL	ATTENTION	ATTENTION

WEAR

All component wear rates are normal.

PQ	UOM	Method	Limit/Abn	Current	History1	History2
Iron	ppm	ASTM D5185m	>20	10	13	11
Chromium	ppm	ASTM D5185m	>10	4	5	3
Nickel	ppm	ASTM D5185m	>10	0	0	0
Titanium	ppm	ASTM D5185m		0	0	0
Silver	ppm	ASTM D5185m		0	0	0
Aluminum	ppm	ASTM D5185m	>10	0	1	0
Lead	ppm	ASTM D5185m	>10	0	<1	<1
Copper	ppm	ASTM D5185m	>75	3	5	3
Tin	ppm	ASTM D5185m	>10	<1	0	0
Vanadium	ppm	ASTM D5185m		0	0	0
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE

CONTAMINATION











The system cleanliness is acceptable for your target ISO 4406 cleanliness code. The system and fluid cleanliness is acceptable.

Silicon	ppm	ASTM D5185m	>20	6	9	12
Potassium	ppm	ASTM D5185m	>20	0	2	2
Water		WC Method	>0.1	NEG	NEG	NEG
Particles >4µm		ASTM D7647	>5000	4963	8251	8310
Particles >6µm		ASTM D7647	>1300	148	364	499
Particles >14µm		ASTM D7647	>160	12	28	34
Particles >21µm		ASTM D7647	>40	4	7	5
Particles >38µm		ASTM D7647	>10	0	1	0
Particles >71µm		ASTM D7647	>3	0	0	0
Oil Cleanliness		ISO 4406 (c)	>19/17/14	19/14/11	20/16/12	20/16/12
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.1	NEG	NEG	NEG

FLUID CONDITION

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m		4	0	1
Boron	ppm	ASTM D5185m		0	0	0
Barium	ppm	ASTM D5185m		0	0	0
Molybdenum	ppm	ASTM D5185m		0	<1	<1
Manganese	ppm	ASTM D5185m		0	0	0
Magnesium	ppm	ASTM D5185m		0	2	2
Calcium	ppm	ASTM D5185m	87	77	82	80
Phosphorus	ppm	ASTM D5185m	727	522	597	576
Zinc	ppm	ASTM D5185m	900	656	774	778
Sulfur	ppm	ASTM D5185m	1500	1642	1481	1315
Acid Number (AN)	mg KOH/g	ASTM D8045	1.0	0.56	0.61	0.59
Visc @ 40°C	cSt	ASTM D445	65	58.9	58.5	59.1

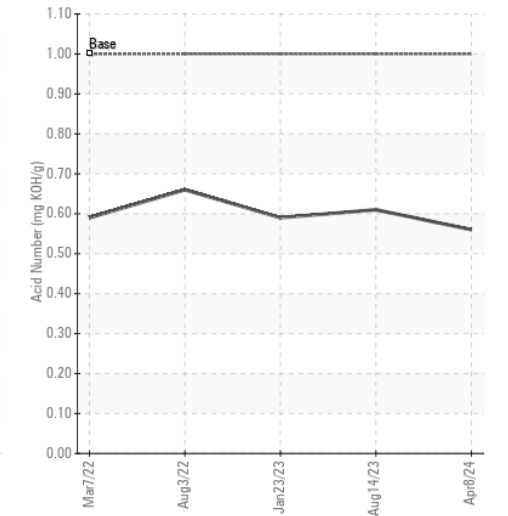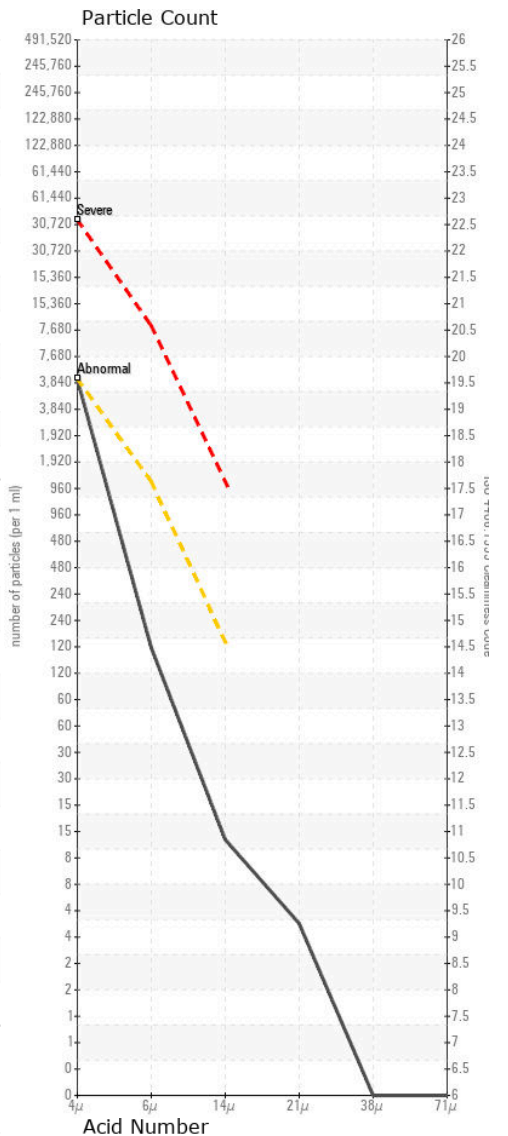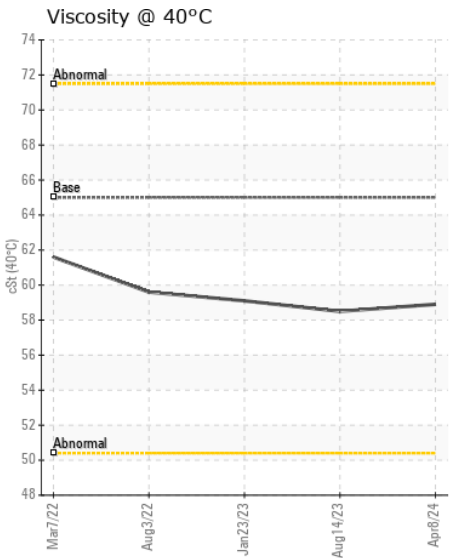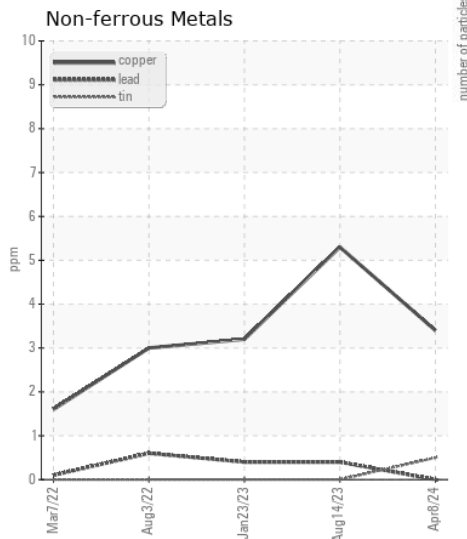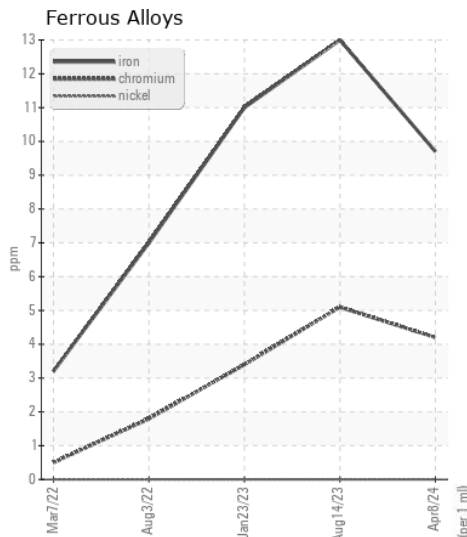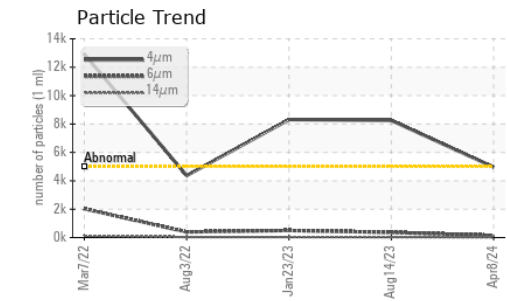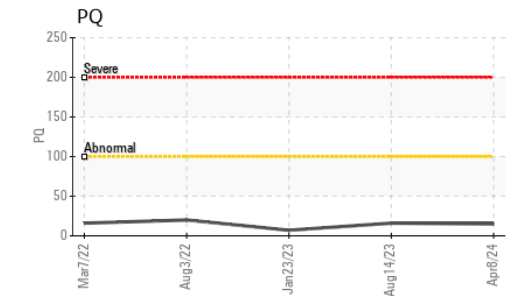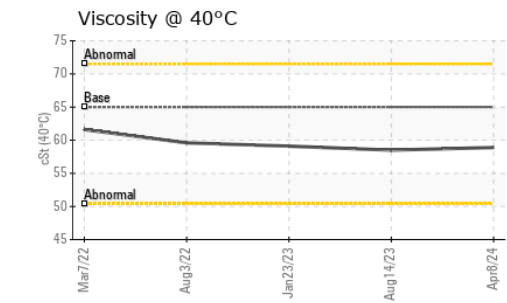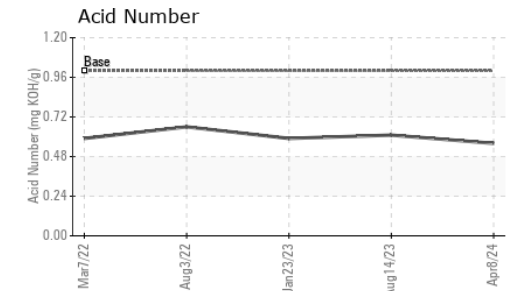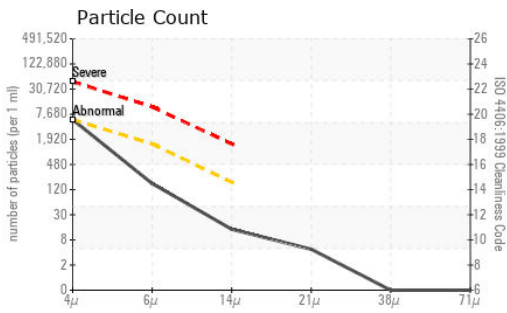

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513

Sample No. : JR0199588

Lab Number : 06150217

Unique Number : 10980295

Test Package : CONST (Additional Tests: PQ)

Received : 16 Apr 2024

Tested : 17 Apr 2024

Diagnosed : 17 Apr 2024 - Wes Davis

JRE - ASHLAND

11047 LEADBETTER RD

ASHLAND, VA

US 23005

Contact: DAVID ZIEG

dzieg@jamesriverequipment.com

T: (804)798-6001

F: (804)798-0292

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)