



VOLVO

OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Area
[SWA509793-10 LIBERTY]
 Machine Id
SKYJACK SJ111-3219 22017054
 Component
Hydraulic System
 Fluid
VOLVO AT 101 (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		VCP454253	---	---
Sample Date		Client Info		03 Apr 2024	---	---
Machine Age	hrs	Client Info		150	---	---
Oil Age	hrs	Client Info		150	---	---
Filter Age	hrs	Client Info		0	---	---
Oil Changed		Client Info		Changed	---	---
Filter Changed		Client Info		Changed	---	---
Sample Status				NORMAL	---	---

WEAR

Metal levels are typical for a new component breaking in.

Iron	ppm	ASTM D5185m	>20	12	---	---
Chromium	ppm	ASTM D5185m	>10	2	---	---
Nickel	ppm	ASTM D5185m	>10	<1	---	---
Titanium	ppm	ASTM D5185m		0	---	---
Silver	ppm	ASTM D5185m		0	---	---
Aluminum	ppm	ASTM D5185m	>10	2	---	---
Lead	ppm	ASTM D5185m	>10	0	---	---
Copper	ppm	ASTM D5185m	>75	1	---	---
Tin	ppm	ASTM D5185m	>10	<1	---	---
Vanadium	ppm	ASTM D5185m		0	---	---
White Metal	scalar	*Visual	NONE	NONE	---	---
Yellow Metal	scalar	*Visual	NONE	NONE	---	---

CONTAMINATION










The amount and size of particulates present in the system are acceptable. There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>20	24	---	---
Potassium	ppm	ASTM D5185m	>20	0	---	---
Water		WC Method	>0.1	NEG	---	---
Particles >4µm		ASTM D7647	>40000	15731	---	---
Particles >6µm		ASTM D7647	>10000	1590	---	---
Particles >14µm		ASTM D7647	>2500	104	---	---
Particles >21µm		ASTM D7647	>640	26	---	---
Particles >38µm		ASTM D7647	>160	2	---	---
Particles >71µm		ASTM D7647	>40	0	---	---
Oil Cleanliness		ISO 4406 (c)	>22/20/18	21/18/14	---	---
Silt	scalar	*Visual	NONE	NONE	---	---
Debris	scalar	*Visual	NONE	NONE	---	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---	---
Appearance	scalar	*Visual	NORML	NORML	---	---
Odor	scalar	*Visual	NORML	NORML	---	---
Emulsified Water	scalar	*Visual	>0.1	NEG	---	---

FLUID CONDITION

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m		4	---	---
Boron	ppm	ASTM D5185m		46	---	---
Barium	ppm	ASTM D5185m		0	---	---
Molybdenum	ppm	ASTM D5185m		<1	---	---
Manganese	ppm	ASTM D5185m		<1	---	---
Magnesium	ppm	ASTM D5185m		<1	---	---
Calcium	ppm	ASTM D5185m		74	---	---
Phosphorus	ppm	ASTM D5185m		176	---	---
Zinc	ppm	ASTM D5185m		74	---	---
Sulfur	ppm	ASTM D5185m		1026	---	---
Acid Number (AN)	mg KOH/g	ASTM D8045		0.69	---	---
Visc @ 40°C	cSt	ASTM D445		22.7	---	---

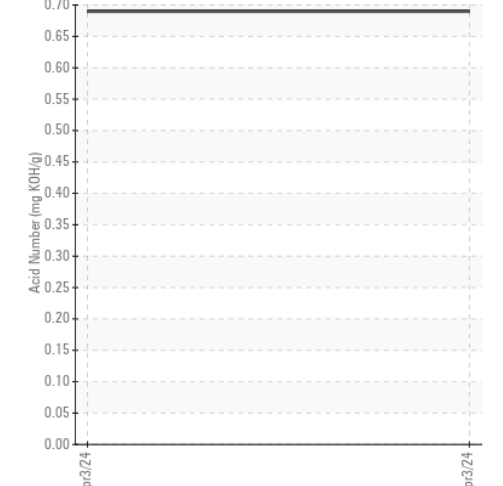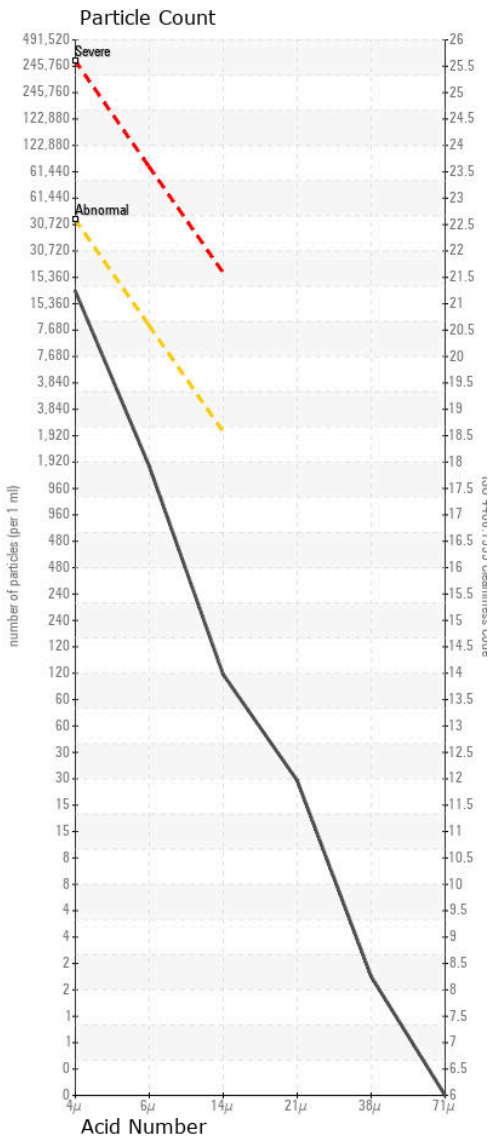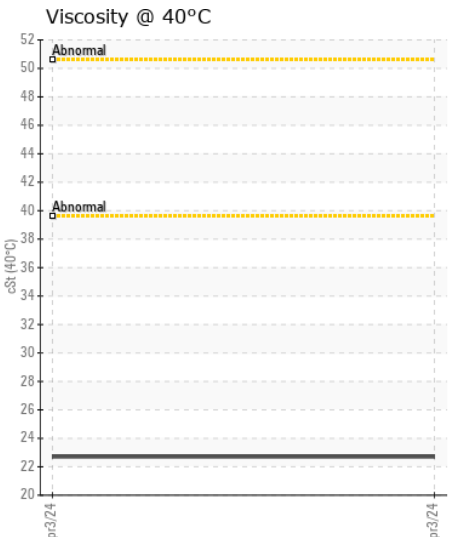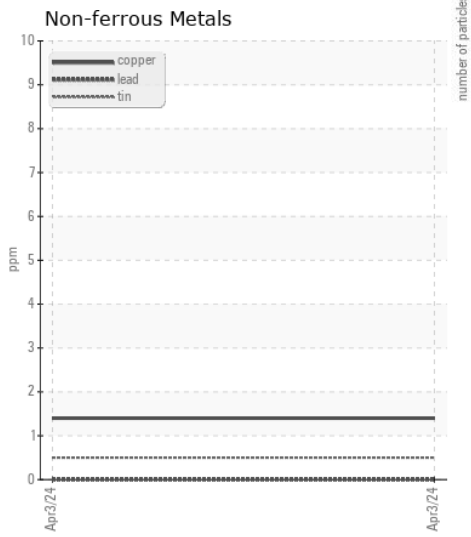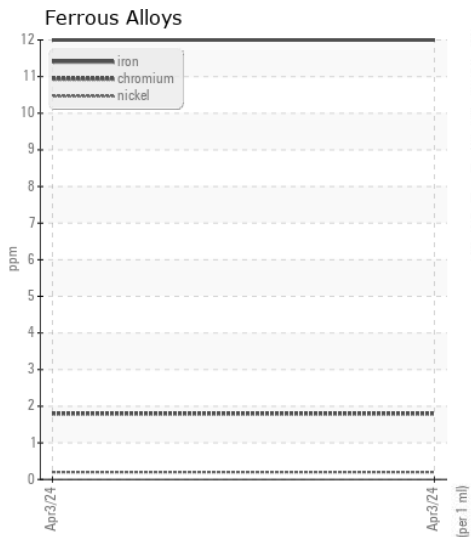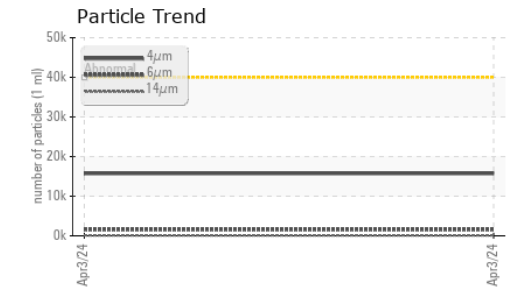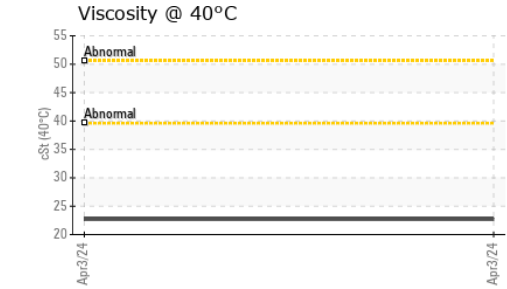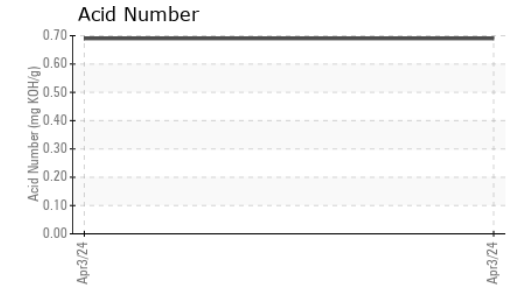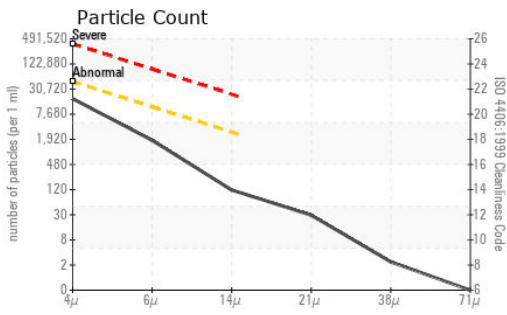

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : VCP454253 **Received** : 16 Apr 2024
Lab Number : 06150250 **Tested** : 17 Apr 2024
Unique Number : 10980328 **Diagnosed** : 18 Apr 2024 - Don Baldrige
Test Package : MOB 2

ALTA EQUIPMENT COMPANY
 1035 WYLIE DRIVE
 BLOOMINGTON, IL
 US 61705
 Contact: JUSTIN PERRY
 justin.perry@altg.com
 T: (309)533-9285
 F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)