



OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Area  
**PCS - PORTABLE CRUSHING SERVICES**

Machine Id  
**KOMATSU TH06 - PCS**

Component  
**Hydraulic System**

Fluid  
**STP HYDRO OIL ISO AW 46 (--- GAL)**

**RECOMMENDATION**

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		<b>KL0013786</b>	KL0014078	KL0013016
Sample Date		Client Info		<b>10 Apr 2024</b>	10 Jan 2024	03 Oct 2023
Machine Age	hrs	Client Info		<b>6841</b>	6773	6524
Oil Age	hrs	Client Info		<b>4291</b>	4223	3974
Filter Age	hrs	Client Info		<b>4291</b>	4223	3974
Oil Changed		Client Info		<b>Not Changd</b>	Not Changd	Not Changd
Filter Changed		Client Info		<b>Not Changd</b>	Not Changd	Not Changd
Sample Status				<b>NORMAL</b>	NORMAL	NORMAL

**WEAR**

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>20	<b>3</b>	3	2
Chromium	ppm	ASTM D5185m	>10	<b>0</b>	0	0
Nickel	ppm	ASTM D5185m	>10	<b>0</b>	0	0
Titanium	ppm	ASTM D5185m		<b>0</b>	0	0
Silver	ppm	ASTM D5185m		<b>0</b>	0	0
Aluminum	ppm	ASTM D5185m	>10	<b>0</b>	0	0
Lead	ppm	ASTM D5185m	>10	<b>0</b>	0	<1
Copper	ppm	ASTM D5185m	>75	<b>5</b>	5	4
Tin	ppm	ASTM D5185m	>10	<b>&lt;1</b>	0	<1
Vanadium	ppm	ASTM D5185m		<b>0</b>	0	0
White Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE

**CONTAMINATION**










The system cleanliness is acceptable for your target ISO 4406 cleanliness code. The system and fluid cleanliness is acceptable.

Silicon	ppm	ASTM D5185m	>20	<b>&lt;1</b>	<1	<1
Potassium	ppm	ASTM D5185m	>20	<b>0</b>	0	<1
Water		WC Method	>0.1	<b>NEG</b>	NEG	NEG
Particles >4µm		ASTM D7647		<b>1444</b>	2507	1077
Particles >6µm		ASTM D7647	>1300	<b>394</b>	276	209
Particles >14µm		ASTM D7647	>160	<b>35</b>	13	16
Particles >21µm		ASTM D7647	>40	<b>9</b>	3	5
Particles >38µm		ASTM D7647	>10	<b>0</b>	0	0
Particles >71µm		ASTM D7647	>3	<b>0</b>	0	0
Oil Cleanliness		ISO 4406 (c)	>17/14	<b>16/12</b>	15/11	15/11
Silt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Debris	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Appearance	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Odor	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Emulsified Water	scalar	*Visual	>0.1	<b>NEG</b>	NEG	NEG

**FLUID CONDITION**

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m		<b>2</b>	<1	0
Boron	ppm	ASTM D5185m		<b>0</b>	0	0
Barium	ppm	ASTM D5185m		<b>0</b>	0	0
Molybdenum	ppm	ASTM D5185m		<b>0</b>	0	0
Manganese	ppm	ASTM D5185m		<b>0</b>	0	<1
Magnesium	ppm	ASTM D5185m		<b>0</b>	0	2
Calcium	ppm	ASTM D5185m		<b>31</b>	26	32
Phosphorus	ppm	ASTM D5185m		<b>302</b>	326	324
Zinc	ppm	ASTM D5185m		<b>239</b>	301	312
Sulfur	ppm	ASTM D5185m		<b>1259</b>	1194	1011
Acid Number (AN)	mg KOH/g	ASTM D8045		<b>0.37</b>	0.43	0.46
Visc @ 40°C	cSt	ASTM D445		<b>41.9</b>	41.8	41.5

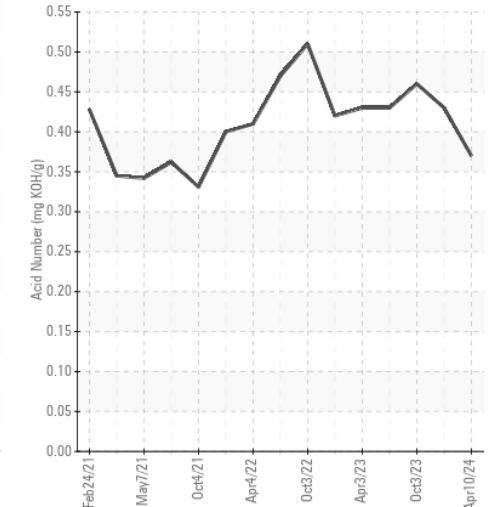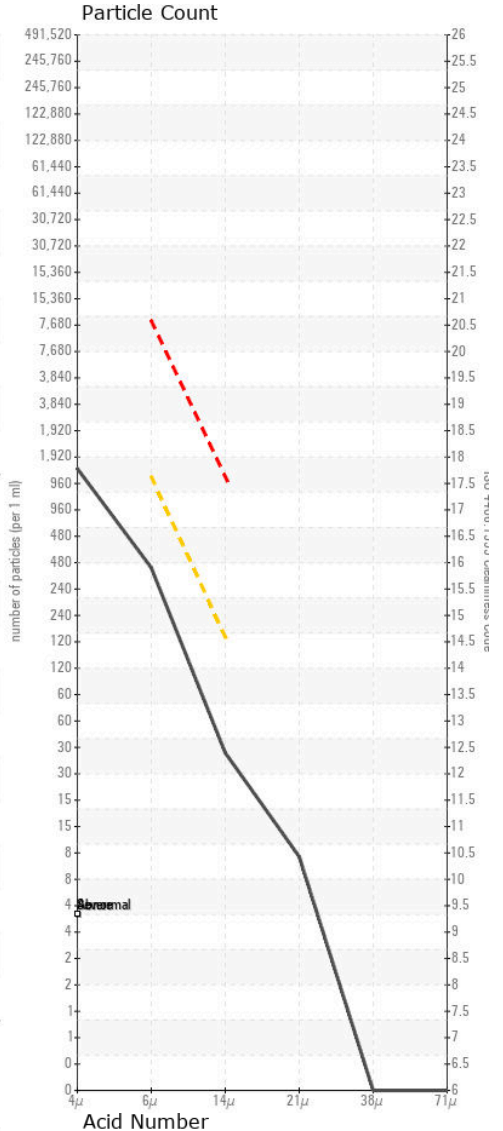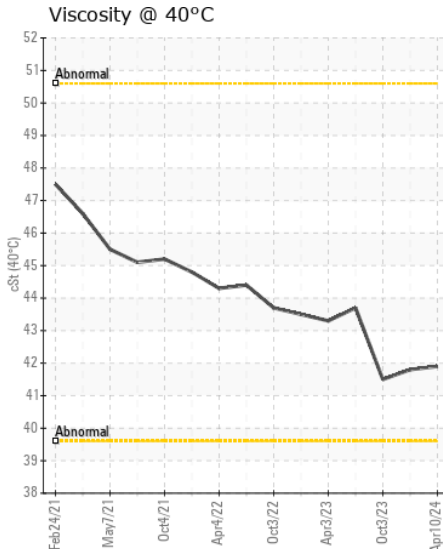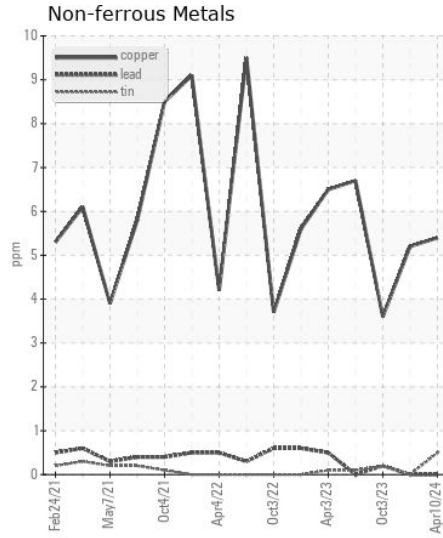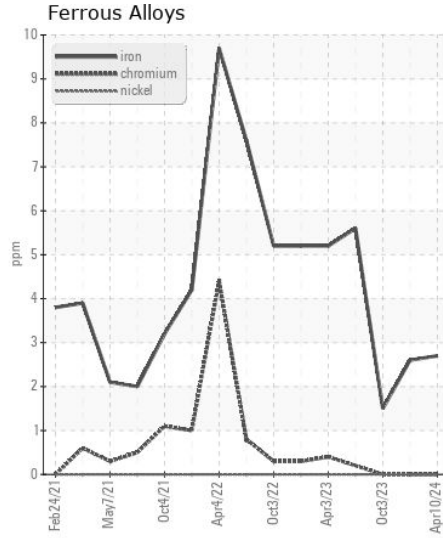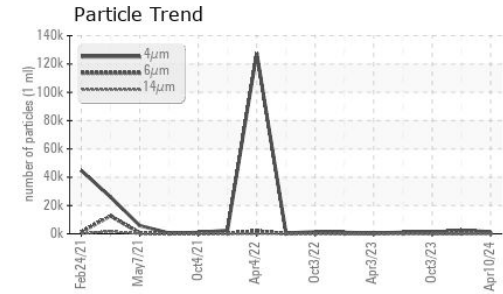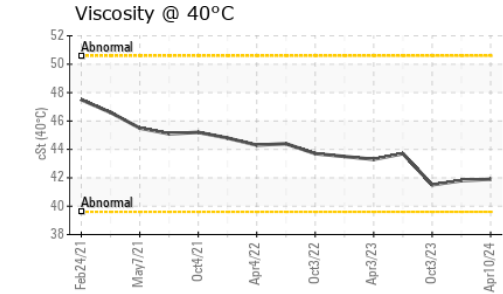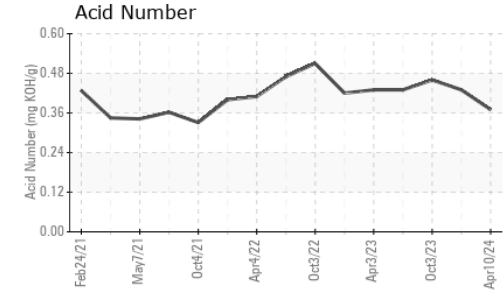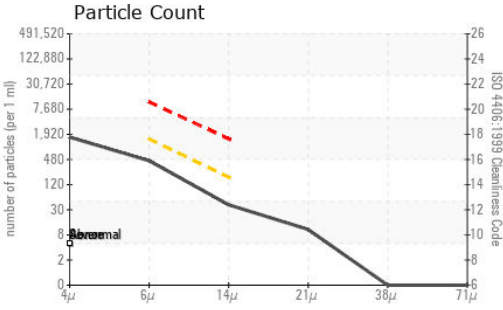

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : KL0013786  
**Lab Number** : 06150278  
**Unique Number** : 10980356  
**Test Package** : MOB 2

**Received** : 16 Apr 2024  
**Tested** : 17 Apr 2024  
**Diagnosed** : 17 Apr 2024 - Wes Davis

**PIKES PEAK PERFORMANCE PRODUCTS**  
 7888 BULLET RD  
 PEYTON, CO  
 US 80831

Contact: SCOTT RIGGS  
 rriggs.pikespeakperformance@gmail.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T: (303)434-0126

F: x: