



WEAR	<b>NORMAL</b>
CONTAMINATION	<b>NORMAL</b>
FLUID CONDITION	<b>NORMAL</b>

Machine Id  
**SENNEBOGEN 830M-T 830.0.2922**  
 Component  
**Rear Left 6WD Hub**  
 Fluid  
**JOHN DEERE GL-5 80W90 (2 QTS)**

### RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		<b>JR0193919</b>	JR0200549	JR0193973
Sample Date		Client Info		<b>14 Apr 2024</b>	25 Jan 2024	05 Dec 2023
Machine Age	hrs	Client Info		<b>10160</b>	8566	7611
Oil Age	hrs	Client Info		<b>1594</b>	8113	453
Filter Age	hrs	Client Info		<b>0</b>	0	0
Oil Changed		Client Info		<b>Changed</b>	Changed	Not Changd
Filter Changed		Client Info		<b>N/A</b>	N/A	N/A
Sample Status				<b>NORMAL</b>	NORMAL	NORMAL

### WEAR

All component wear rates are normal.

PQ		ASTM D8184		<b>50</b>	57	36
Iron	ppm	ASTM D5185m	>200	<b>34</b>	41	25
Chromium	ppm	ASTM D5185m	>10	<b>&lt;1</b>	0	0
Nickel	ppm	ASTM D5185m	>10	<b>&lt;1</b>	<1	0
Titanium	ppm	ASTM D5185m		<b>&lt;1</b>	0	0
Silver	ppm	ASTM D5185m		<b>0</b>	0	0
Aluminum	ppm	ASTM D5185m		<b>2</b>	<1	0
Lead	ppm	ASTM D5185m		<b>&lt;1</b>	0	0
Copper	ppm	ASTM D5185m		<b>4</b>	3	3
Tin	ppm	ASTM D5185m		<b>&lt;1</b>	<1	0
Vanadium	ppm	ASTM D5185m		<b>&lt;1</b>	0	<1
White Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE

### CONTAMINATION







There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m		<b>5</b>	5	4
Potassium	ppm	ASTM D5185m	>20	<b>&lt;1</b>	1	0
Water		WC Method	>0.2	<b>NEG</b>	NEG	NEG
Silt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Debris	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Appearance	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Odor	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	<b>NEG</b>	NEG	NEG

### FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185m		<b>&lt;1</b>	4	1
Boron	ppm	ASTM D5185m		<b>2</b>	0	<1
Barium	ppm	ASTM D5185m		<b>&lt;1</b>	<1	0
Molybdenum	ppm	ASTM D5185m		<b>1</b>	0	<1
Manganese	ppm	ASTM D5185m		<b>&lt;1</b>	<1	<1
Magnesium	ppm	ASTM D5185m		<b>4</b>	4	0
Calcium	ppm	ASTM D5185m		<b>38</b>	39	10
Phosphorus	ppm	ASTM D5185m		<b>528</b>	408	475
Zinc	ppm	ASTM D5185m		<b>25</b>	25	11
Sulfur	ppm	ASTM D5185m		<b>21568</b>	14583	16959
Visc @ 40°C	cSt	ASTM D445		<b>127</b>	116	115

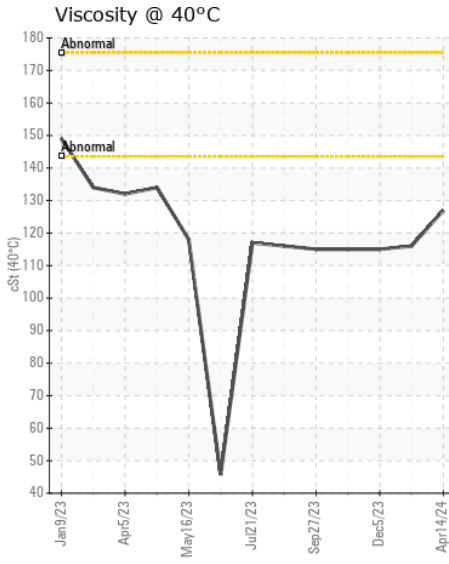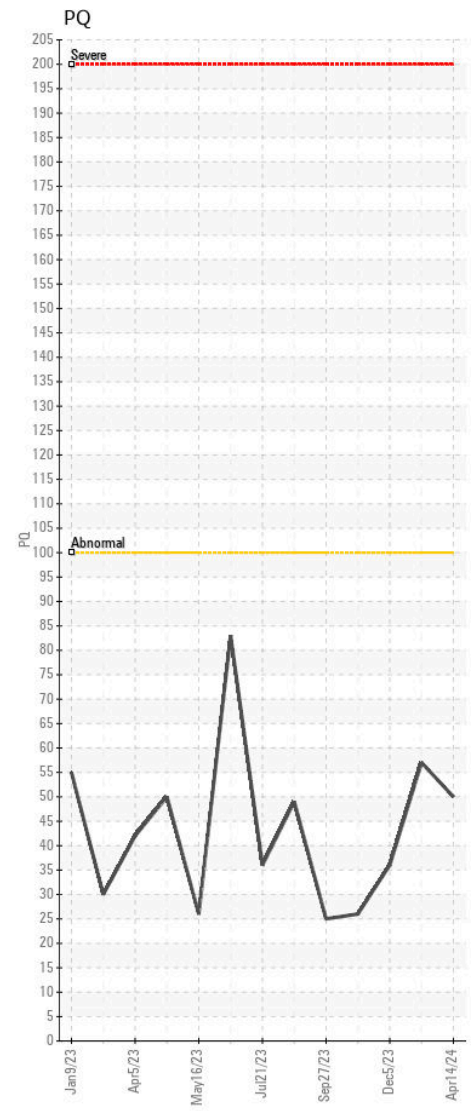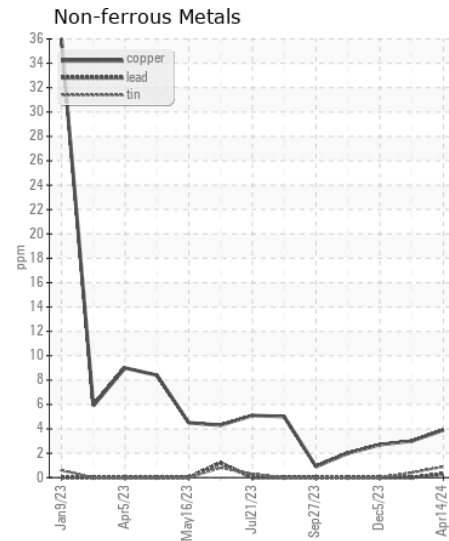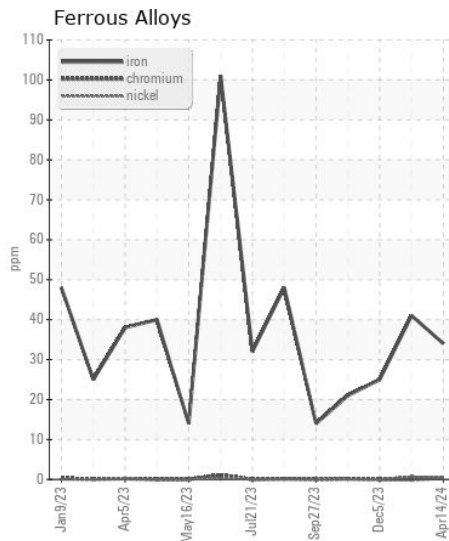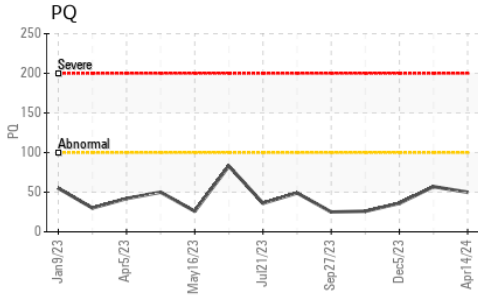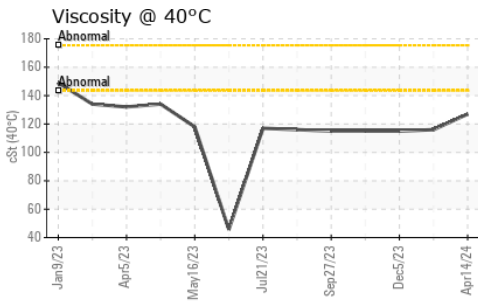

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : JR0193919 **Received** : 16 Apr 2024  
**Lab Number** : 06150637 **Tested** : 17 Apr 2024  
**Unique Number** : 10980715 **Diagnosed** : 18 Apr 2024 - Wes Davis  
**Test Package** : CONST ( Additional Tests: PQ )

**JRE - GREENVILLE**  
 3604 HIGHWAY 264 E  
 GREENVILLE, NC  
 US 27834-5800

Contact: GREENVILLE SHOP  
 christopher.martin@jamesriverequipment.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:  
F: