



WEAR	<b>NORMAL</b>
CONTAMINATION	<b>NORMAL</b>
FLUID CONDITION	<b>NORMAL</b>

Machine Id  
**JOHN DEERE 748L 1DW748LBHNF713628**

Component  
**Front Differential**

Fluid  
**JOHN DEERE HY-GARD HYD/TRANS (32 QTS)**

### RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		<b>JR0208799</b>	JR0200646	JR0193880
Sample Date		Client Info		<b>14 Apr 2024</b>	06 Feb 2024	14 Dec 2023
Machine Age	hrs	Client Info		<b>5533</b>	5082	4761
Oil Age	hrs	Client Info		<b>4441</b>	4311	771
Filter Age	hrs	Client Info		<b>0</b>	0	0
Oil Changed		Client Info		<b>Not Changd</b>	Not Changd	Not Changd
Filter Changed		Client Info		<b>Not Changd</b>	N/A	Not Changd
Sample Status				<b>NORMAL</b>	NORMAL	NORMAL

### WEAR

All component wear rates are normal.

PQ	UOM	Method	Limit/Abn	Current	History1	History2
PQ		ASTM D8184		<b>24</b>	19	15
Iron	ppm	ASTM D5185m	>500	<b>28</b>	38	57
Chromium	ppm	ASTM D5185m	>10	<b>&lt;1</b>	<1	0
Nickel	ppm	ASTM D5185m	>10	<b>&lt;1</b>	0	0
Titanium	ppm	ASTM D5185m		<b>&lt;1</b>	0	0
Silver	ppm	ASTM D5185m		<b>0</b>	0	0
Aluminum	ppm	ASTM D5185m	>25	<b>2</b>	2	0
Lead	ppm	ASTM D5185m	>25	<b>0</b>	0	0
Copper	ppm	ASTM D5185m	>100	<b>5</b>	6	3
Tin	ppm	ASTM D5185m	>10	<b>&lt;1</b>	<1	0
Vanadium	ppm	ASTM D5185m		<b>&lt;1</b>	0	0
White Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE

### CONTAMINATION

There is no indication of any contamination in the oil.


Silicon	ppm	ASTM D5185m	>75	<b>2</b>	8	4
Potassium	ppm	ASTM D5185m	>20	<b>0</b>	1	0
Water		WC Method	>.2	<b>NEG</b>	NEG	NEG
Silt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Debris	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Appearance	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Odor	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Emulsified Water	scalar	*Visual	>.2	<b>NEG</b>	NEG	NEG

### FLUID CONDITION


The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185m		<b>0</b>	<1	<1
Boron	ppm	ASTM D5185m	6	<b>3</b>	4	8
Barium	ppm	ASTM D5185m	0	<b>4</b>	2	0
Molybdenum	ppm	ASTM D5185m	0	<b>3</b>	<1	2
Manganese	ppm	ASTM D5185m		<b>&lt;1</b>	0	<1
Magnesium	ppm	ASTM D5185m	145	<b>100</b>	101	112
Calcium	ppm	ASTM D5185m	3570	<b>3537</b>	3228	3480
Phosphorus	ppm	ASTM D5185m	1290	<b>978</b>	948	1086
Zinc	ppm	ASTM D5185m	1640	<b>1057</b>	1275	1249
Sulfur	ppm	ASTM D5185m		<b>3943</b>	3792	4134
Visc @ 40°C	cSt	ASTM D445	57.0	<b>52.8</b>	54.4	55.2


Viscosity @ 40°C

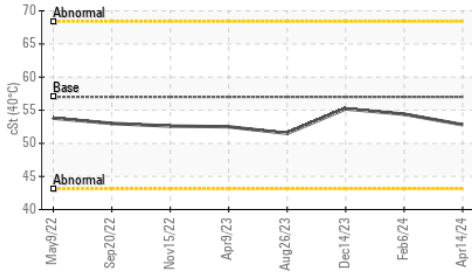


PQ

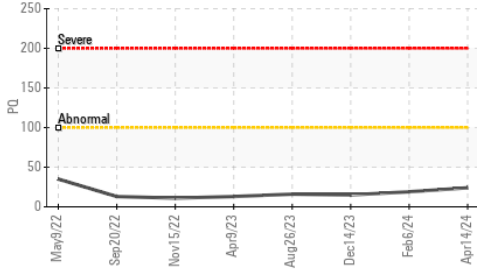


Ferrous Alloys

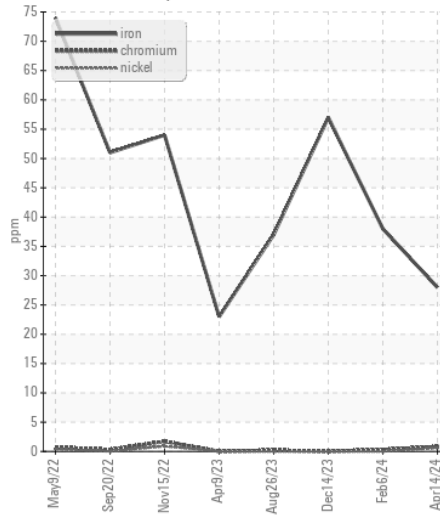


Non-ferrous Metals

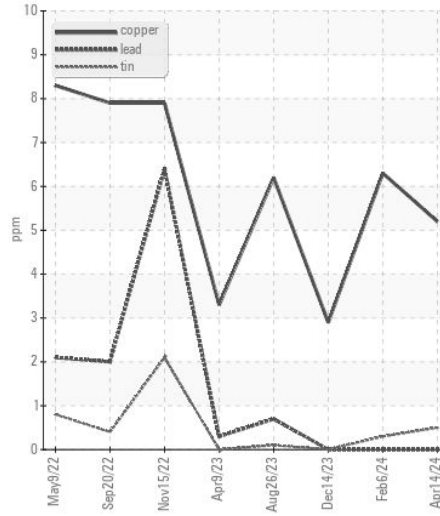

PQ

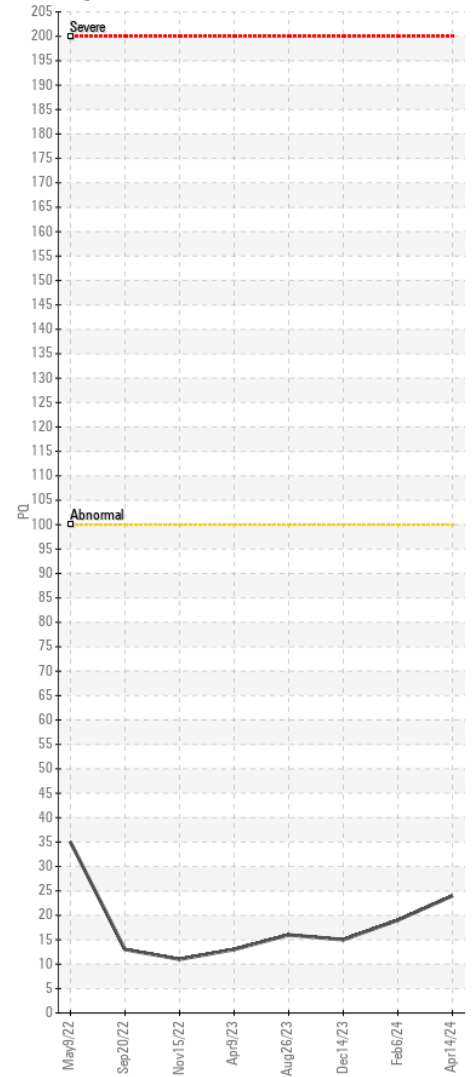

Viscosity @ 40°C

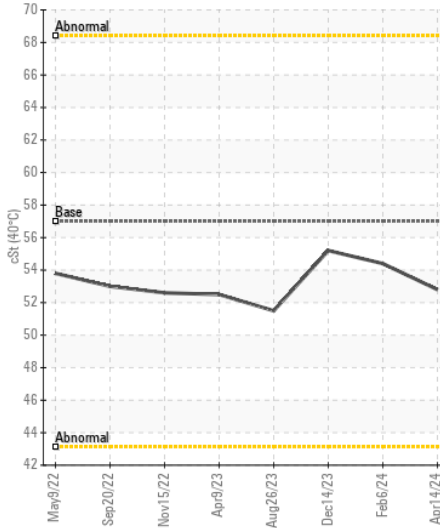

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513

Sample No. : JR0208799

Lab Number : 06150647

Unique Number : 10980725

Test Package : CONST ( Additional Tests: PQ )

Received : 16 Apr 2024

Tested : 17 Apr 2024

Diagnosed : 17 Apr 2024 - Wes Davis

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

JRE - GREENVILLE

3604 HIGHWAY 264 E

GREENVILLE, NC

US 27834-5800

Contact: GREENVILLE SHOP

christopher.martin@jamesriverequipment.com

T:

F: