



WEAR	<b>NORMAL</b>
CONTAMINATION	<b>NORMAL</b>
FLUID CONDITION	<b>NORMAL</b>



Machine Id  
**JOHN DEERE 410E-II 1DW410EBKNF715123**  
Component  
**Rear Differential**  
Fluid  
**JOHN DEERE HY-GARD HYD/TRANS (14 GAL)**

### RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		<b>JR0214188</b>	JR0201048	JR0193614
Sample Date		Client Info		<b>12 Apr 2024</b>	06 Feb 2024	27 Nov 2023
Machine Age	hrs	Client Info		<b>4989</b>	4603	4135
Oil Age	hrs	Client Info		<b>4521</b>	468	2000
Filter Age	hrs	Client Info		<b>386</b>	468	622
Oil Changed		Client Info		<b>Not Changed</b>	N/A	Changed
Filter Changed		Client Info		<b>Changed</b>	Changed	Changed
Sample Status				<b>NORMAL</b>	NORMAL	NORMAL

### WEAR

All component wear rates are normal.

PQ		ASTM D8184		<b>18</b>	16	13
Iron	ppm	ASTM D5185m	>500	<b>14</b>	14	27
Chromium	ppm	ASTM D5185m	>10	<b>&lt;1</b>	<1	<1
Nickel	ppm	ASTM D5185m	>10	<b>&lt;1</b>	0	<1
Titanium	ppm	ASTM D5185m		<b>&lt;1</b>	0	<1
Silver	ppm	ASTM D5185m		<b>0</b>	0	0
Aluminum	ppm	ASTM D5185m	>25	<b>2</b>	1	2
Lead	ppm	ASTM D5185m	>25	<b>3</b>	1	5
Copper	ppm	ASTM D5185m	>100	<b>22</b>	19	47
Tin	ppm	ASTM D5185m	>10	<b>7</b>	1	4
Vanadium	ppm	ASTM D5185m		<b>&lt;1</b>	0	0
White Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE

### CONTAMINATION







There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>75	<b>2</b>	3	4
Potassium	ppm	ASTM D5185m	>20	<b>0</b>	2	2
Water		WC Method	>.2	<b>NEG</b>	NEG	NEG
Silt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Debris	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Appearance	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Odor	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Emulsified Water	scalar	*Visual	>.2	<b>NEG</b>	NEG	NEG

### FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185m		<b>&lt;1</b>	<1	0
Boron	ppm	ASTM D5185m	6	<b>0</b>	<1	0
Barium	ppm	ASTM D5185m	0	<b>5</b>	0	0
Molybdenum	ppm	ASTM D5185m	0	<b>&lt;1</b>	0	1
Manganese	ppm	ASTM D5185m		<b>&lt;1</b>	0	1
Magnesium	ppm	ASTM D5185m	145	<b>93</b>	98	95
Calcium	ppm	ASTM D5185m	3570	<b>3592</b>	3282	3489
Phosphorus	ppm	ASTM D5185m	1290	<b>956</b>	1014	1005
Zinc	ppm	ASTM D5185m	1640	<b>1067</b>	1250	1213
Sulfur	ppm	ASTM D5185m		<b>3749</b>	3639	3965
Visc @ 40°C	cSt	ASTM D445	57.0	<b>51.5</b>	47.8	50.6

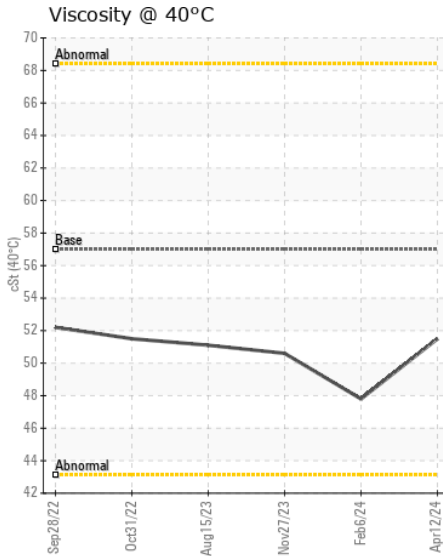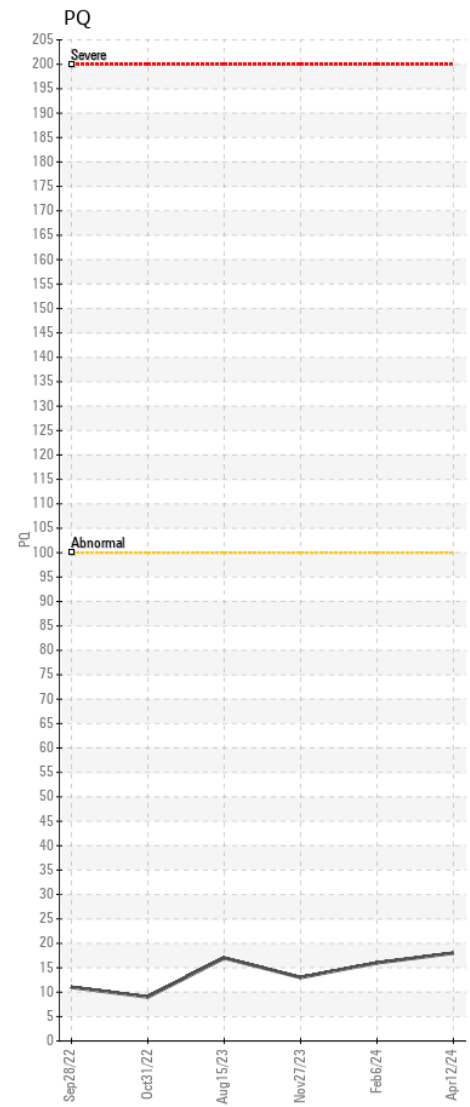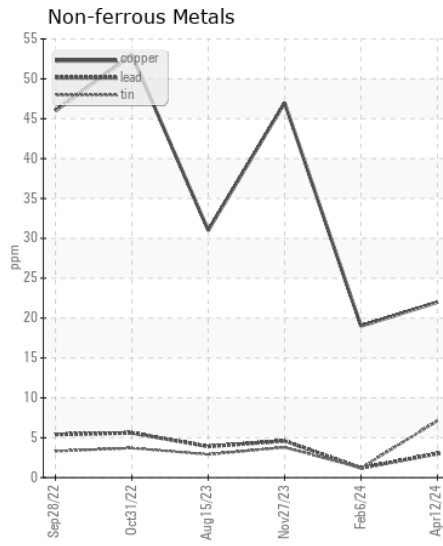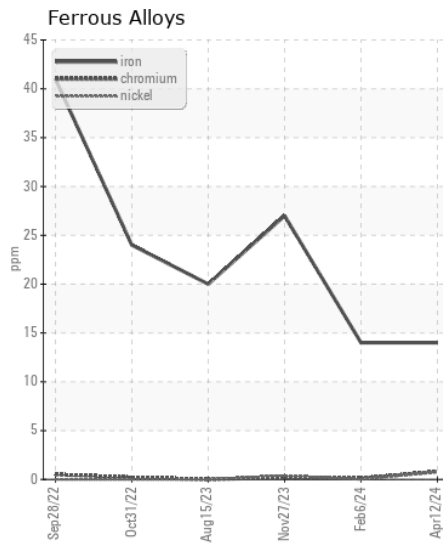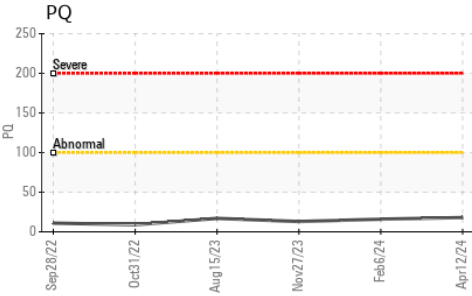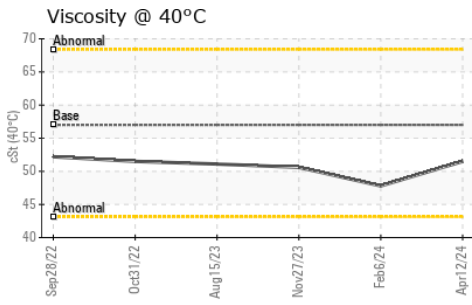

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : JR0214188 **Received** : 16 Apr 2024  
**Lab Number** : 06150649 **Tested** : 17 Apr 2024  
**Unique Number** : 10980727 **Diagnosed** : 17 Apr 2024 - Wes Davis  
**Test Package** : CONST ( Additional Tests: PQ )

**JRE - NEW BERN**  
 3816 MARTIN LUTHER KING BLVD  
 NEW BERN, NC  
 US 28562  
 Contact: NEW BERN SHOP  
 nick.etherdridge@jamesriverequipment.com; canastasio@wearcheckusa.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:  
F: