



OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Area
Store 2 - Beaver [RO#149910]
Machine Id
JOHN DEERE 904P 1DW904PALPLX07507
Component
Front Axle
Fluid
JOHN DEERE HY-GARD HYD/TRANS (18 GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		LEC0048844	LEC0047643	---
Sample Date		Client Info		12 Apr 2024	30 Jan 2024	---
Machine Age	hrs	Client Info		1054	585	---
Oil Age	hrs	Client Info		469	585	---
Filter Age	hrs	Client Info		469	585	---
Oil Changed		Client Info		Not Chngd	Changed	---
Filter Changed		Client Info		Changed	Changed	---
Sample Status				NORMAL	NORMAL	---

WEAR

All component wear rates are normal.

PQ	UOM	Method	Limit/Abn	Current	History1	History2
PQ		ASTM D8184		88	171	---
Iron	ppm	ASTM D5185m	>750	135	144	---
Chromium	ppm	ASTM D5185m	>11	2	1	---
Nickel	ppm	ASTM D5185m	>10	4	1	---
Titanium	ppm	ASTM D5185m		<1	0	---
Silver	ppm	ASTM D5185m		<1	0	---
Aluminum	ppm	ASTM D5185m	>21	2	0	---
Lead	ppm	ASTM D5185m	>49	3	1	---
Copper	ppm	ASTM D5185m	>101	62	52	---
Tin	ppm	ASTM D5185m	>10	10	2	---
Vanadium	ppm	ASTM D5185m		1	0	---
White Metal	scalar	*Visual	NONE	NONE	NONE	---
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	---

CONTAMINATION







There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>31	11	4	---
Potassium	ppm	ASTM D5185m	>20	3	0	---
Water		WC Method	>0.1	NEG	NEG	---
Silt	scalar	*Visual	NONE	NONE	NONE	---
Debris	scalar	*Visual	NONE	NONE	NONE	---
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	NORML	---
Emulsified Water	scalar	*Visual	>0.1	NEG	NEG	---

FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185m	>51	7	15	---
Boron	ppm	ASTM D5185m	6	46	114	---
Barium	ppm	ASTM D5185m	0	4	1	---
Molybdenum	ppm	ASTM D5185m	0	1	0	---
Manganese	ppm	ASTM D5185m		18	24	---
Magnesium	ppm	ASTM D5185m	145	75	9	---
Calcium	ppm	ASTM D5185m	3570	3911	3292	---
Phosphorus	ppm	ASTM D5185m	1290	1121	1153	---
Zinc	ppm	ASTM D5185m	1640	1250	1376	---
Sulfur	ppm	ASTM D5185m		4210	3052	---
Visc @ 40°C	cSt	ASTM D445	57.0	57.0	64.8	---

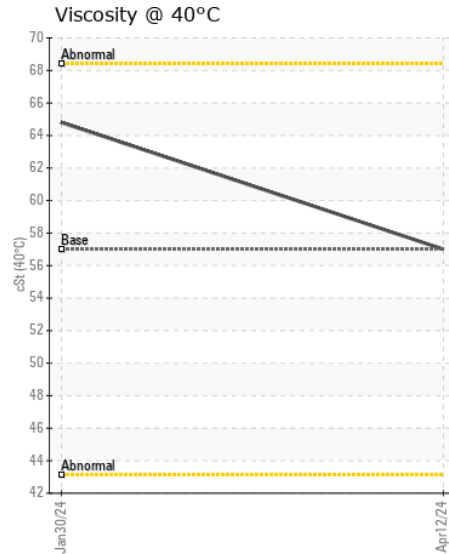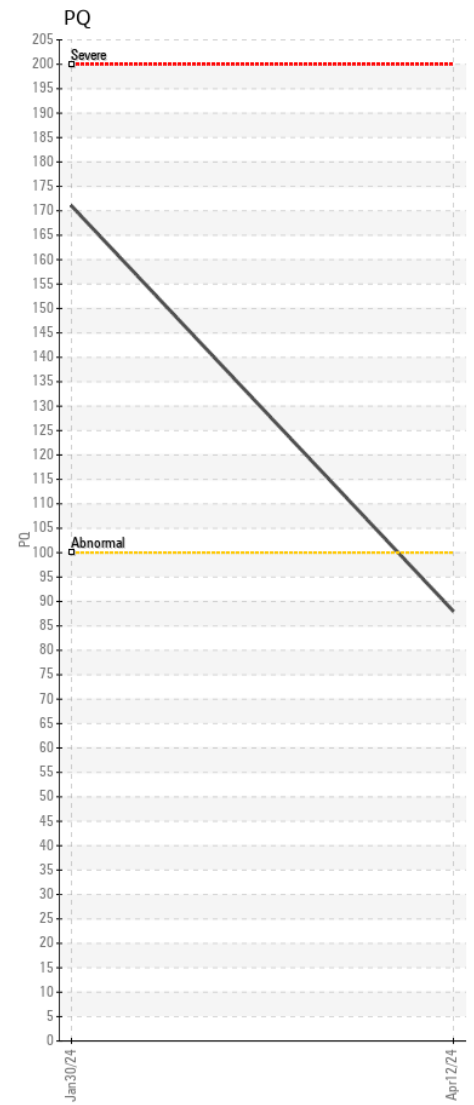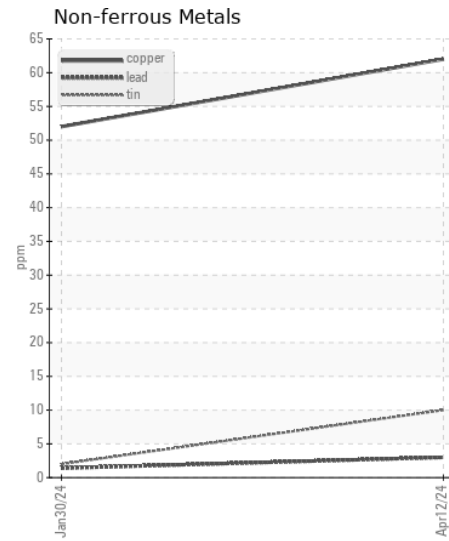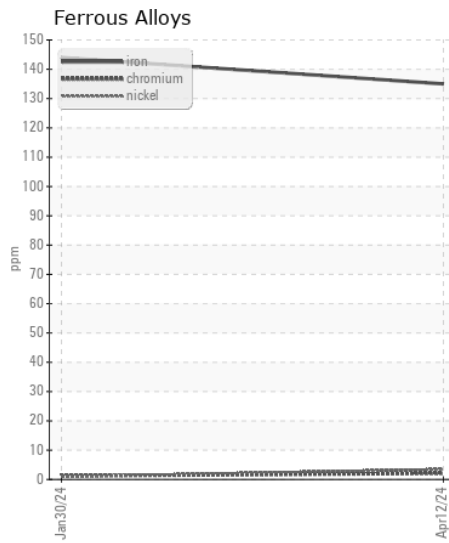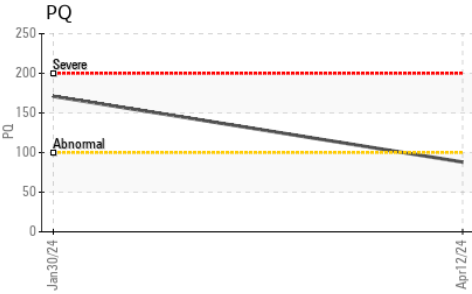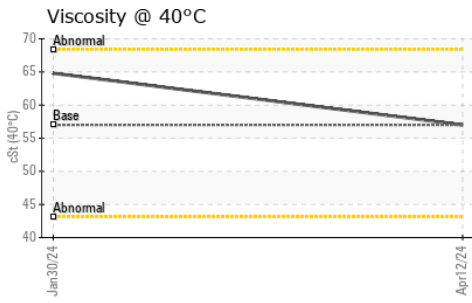

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : LEC0048844 **Received** : 16 Apr 2024
Lab Number : 06150690 **Tested** : 17 Apr 2024
Unique Number : 10980768 **Diagnosed** : 18 Apr 2024 - Sean Felton
Test Package : CONST (Additional Tests: PQ)

LESLIE EQUIPMENT COMPANY
 105 TENNIS CENTER DR.
 MARIETTA, OH
 US 45750-9765
 Contact: LEANNE KENDALL
 KendalLeanne@lec1.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T: (740)373-5570