



VOLVO

OIL ANALYSIS REPORT

WEAR
CONTAMINATION
FLUID CONDITION

ATTENTION
ABNORMAL
ATTENTION



Area

[47578]

Machine Id

VOLVO EC350EL 314401

Component

Rear Left Final Drive

Fluid

VOLVO 85W90 (--- GAL)

RECOMMENDATION

We advise that you check all areas where dirt can enter the system. The oil change at the time of sampling has been noted. Resample at the next service interval to monitor.

WEAR

All component wear rates are normal.

CONTAMINATION

Elemental levels of silicon (Si) and aluminum (Al) indicate alumina-silicate (coarse dirt) ingress.

FLUID CONDITION












The oil viscosity is lower than normal. Confirm oil type.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		VCP417910	VCP426538	---
Sample Date		Client Info		14 Mar 2024	19 Apr 2023	---
Machine Age	hrs	Client Info		1967	654	---
Oil Age	hrs	Client Info		500	0	---
Filter Age	hrs	Client Info		0	0	---
Oil Changed		Client Info		Changed	Changed	---
Filter Changed		Client Info		N/A	N/A	---
Sample Status				ABNORMAL	NORMAL	---

Iron	ppm	ASTM D5185m	>500	375	324	---
Chromium	ppm	ASTM D5185m	>10	7	4	---
Nickel	ppm	ASTM D5185m	>10	1	<1	---
Titanium	ppm	ASTM D5185m		1	<1	---
Silver	ppm	ASTM D5185m		0	0	---
Aluminum	ppm	ASTM D5185m	>25	10	7	---
Lead	ppm	ASTM D5185m	>25	0	0	---
Copper	ppm	ASTM D5185m	>50	<1	<1	---
Tin	ppm	ASTM D5185m	>10	0	0	---
Vanadium	ppm	ASTM D5185m		<1	0	---
White Metal	scalar	*Visual	NONE	NONE	LIGHT	---
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	---

Silicon	ppm	ASTM D5185m	>75	86	30	---
Potassium	ppm	ASTM D5185m	>20	0	3	---
Water		WC Method	>0.2	NEG	NEG	---
Silt	scalar	*Visual	NONE	LIGHT	NONE	---
Debris	scalar	*Visual	NONE	NONE	NONE	---
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	NORML	---
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG	---

Sodium	ppm	ASTM D5185m		<1	<1	---
Boron	ppm	ASTM D5185m		65	0	---
Barium	ppm	ASTM D5185m		<1	0	---
Molybdenum	ppm	ASTM D5185m		<1	<1	---
Manganese	ppm	ASTM D5185m		6	4	---
Magnesium	ppm	ASTM D5185m		4	<1	---
Calcium	ppm	ASTM D5185m		2972	26	---
Phosphorus	ppm	ASTM D5185m		1115	235	---
Zinc	ppm	ASTM D5185m		1078	11	---
Sulfur	ppm	ASTM D5185m		7476	16292	---
Visc @ 40°C	cSt	ASTM D445		51.7	172	---

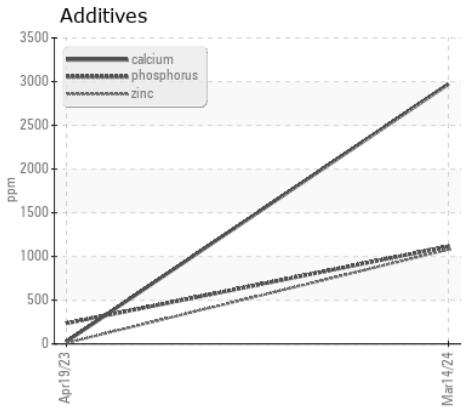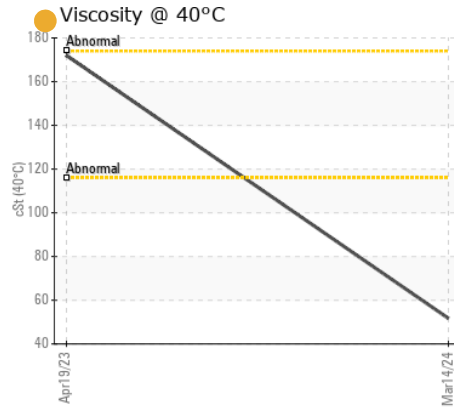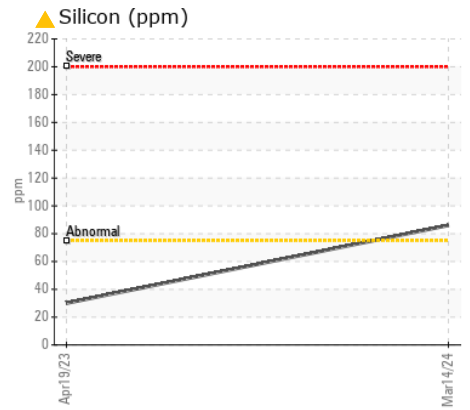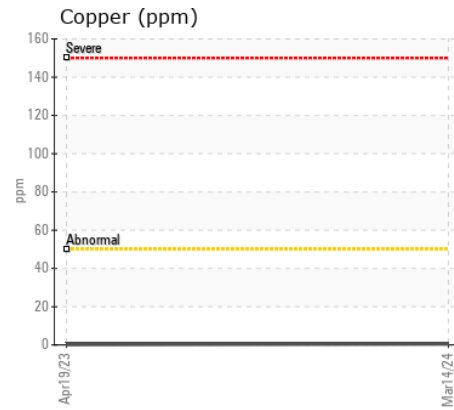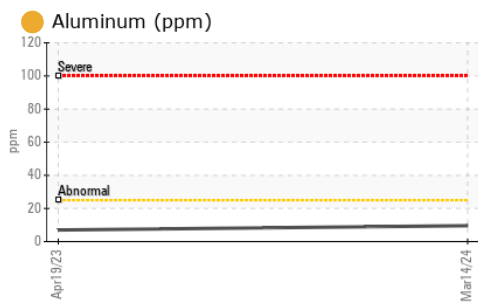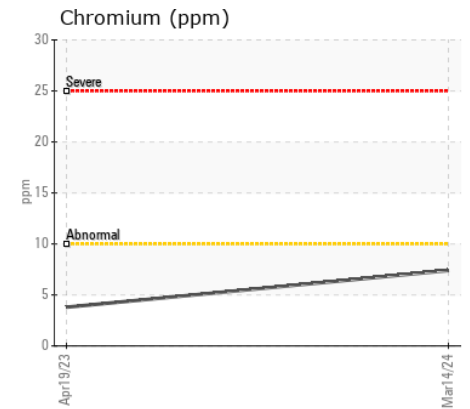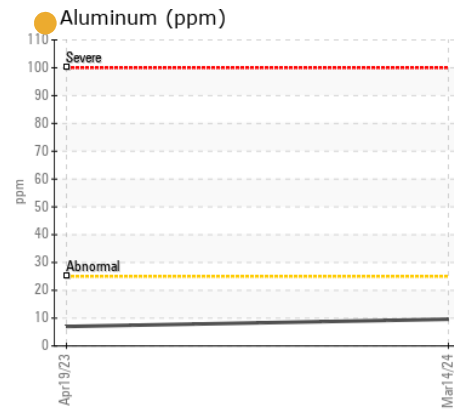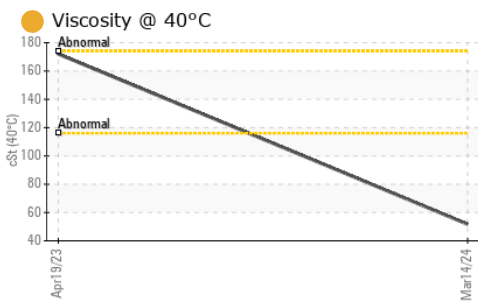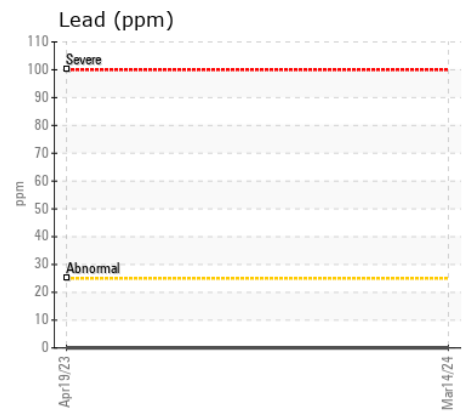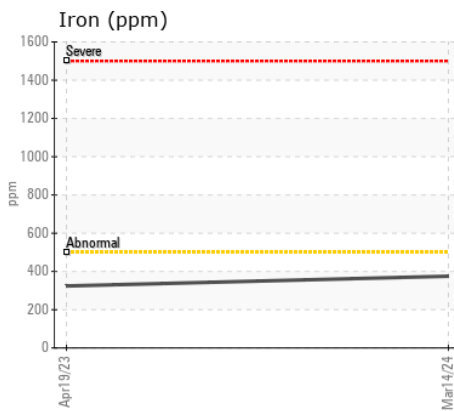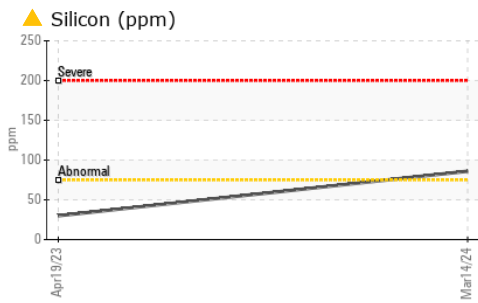

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : VCP417910
Lab Number : 06150712
Unique Number : 10980790
Test Package : MOB 1

Received : 16 Apr 2024
Tested : 17 Apr 2024
Diagnosed : 18 Apr 2024 - Don Baldrige

365 - ASCENDUM MACHINERY INC - SAVANNAH
 54 MEDLINE DR
 RICHMOND HILL, GA
 US 31324
 Contact: JESSE WILSON
 jesse.wilson@ascendummachinery.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

F: (912)964-9515