



# ASCENDUM

## OIL ANALYSIS REPORT

WEAR	<b>NORMAL</b>
CONTAMINATION	<b>NORMAL</b>
FLUID CONDITION	<b>NORMAL</b>



Machine Id  
**VOLVO L110H 632521**  
Component  
**Front Axle**  
Fluid  
**TRANSAXLE OIL SAE 75W80 (--- GAL)**

### RECOMMENDATION

Resample at the next service interval to monitor. The fluid was not specified, however, a fluid match indicates that this fluid is (GENERIC) TRANSAXLE OIL SAE 75W80. Please confirm.

### WEAR

All component wear rates are normal.





### CONTAMINATION

There is no indication of any contamination in the oil.

### FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		ASC0006547	---	---
Sample Date		Client Info		09 Apr 2024	---	---
Machine Age	hrs	Client Info		2036	---	---
Oil Age	hrs	Client Info		2036	---	---
Filter Age	hrs	Client Info		0	---	---
Oil Changed		Client Info		Changed	---	---
Filter Changed		Client Info		N/A	---	---
Sample Status				NORMAL	---	---
Iron	ppm	ASTM D5185m	>500	73	---	---
Chromium	ppm	ASTM D5185m	>20	1	---	---
Nickel	ppm	ASTM D5185m	>10	0	---	---
Titanium	ppm	ASTM D5185m		<1	---	---
Silver	ppm	ASTM D5185m		<1	---	---
Aluminum	ppm	ASTM D5185m	>30	2	---	---
Lead	ppm	ASTM D5185m	>50	0	---	---
Copper	ppm	ASTM D5185m	>120	4	---	---
Tin	ppm	ASTM D5185m	>20	0	---	---
Vanadium	ppm	ASTM D5185m		<1	---	---
White Metal	scalar	*Visual	NONE	NONE	---	---
Yellow Metal	scalar	*Visual	NONE	NONE	---	---
Silicon	ppm	ASTM D5185m	>50	16	---	---
Potassium	ppm	ASTM D5185m	>20	1	---	---
Water		WC Method	>0.2	NEG	---	---
Silt	scalar	*Visual	NONE	LIGHT	---	---
Debris	scalar	*Visual	NONE	NONE	---	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---	---
Appearance	scalar	*Visual	NORML	NORML	---	---
Odor	scalar	*Visual	NORML	NORML	---	---
Emulsified Water	scalar	*Visual	>0.2	NEG	---	---
Sodium	ppm	ASTM D5185m		8	---	---
Boron	ppm	ASTM D5185m	160	146	---	---
Barium	ppm	ASTM D5185m	10	4	---	---
Molybdenum	ppm	ASTM D5185m	25	3	---	---
Manganese	ppm	ASTM D5185m		3	---	---
Magnesium	ppm	ASTM D5185m	12	11	---	---
Calcium	ppm	ASTM D5185m	3750	4232	---	---
Phosphorus	ppm	ASTM D5185m	1200	1299	---	---
Zinc	ppm	ASTM D5185m	1500	1515	---	---
Sulfur	ppm	ASTM D5185m	6000	6975	---	---
Visc @ 40°C	cSt	ASTM D445	48	42.3	---	---

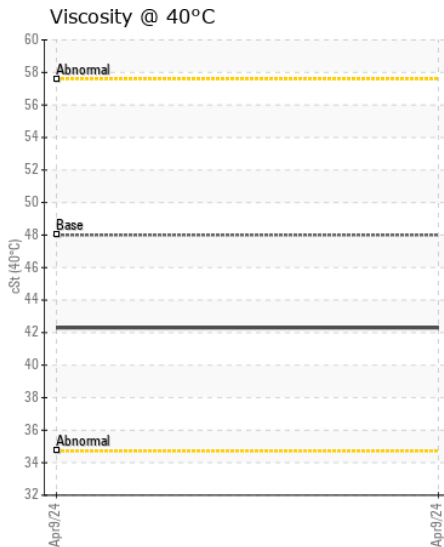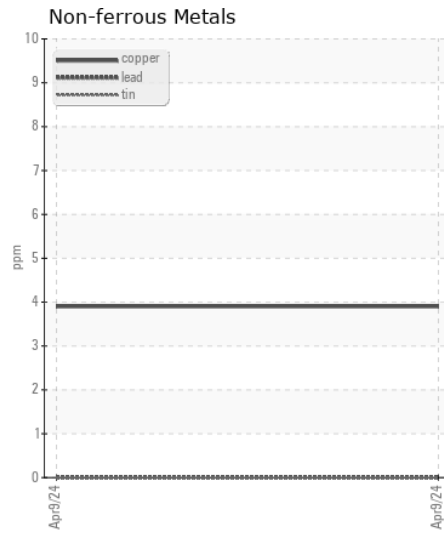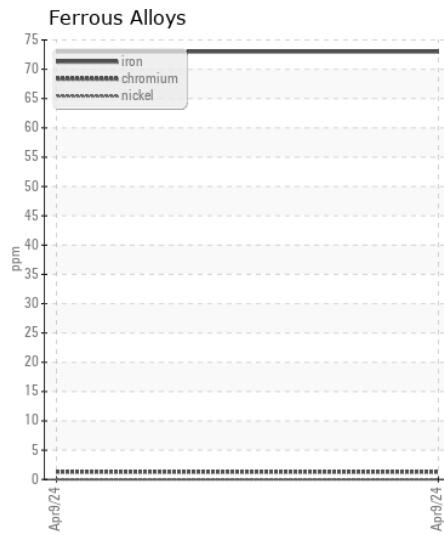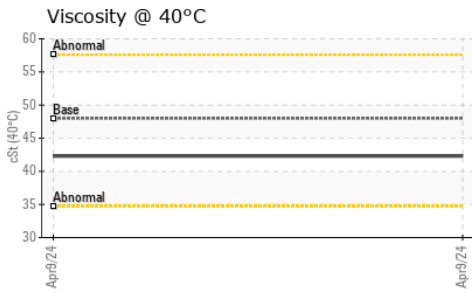

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : ASC0006547  
**Lab Number** : 06150752  
**Unique Number** : 10980830  
**Test Package** : CONST

**Received** : 16 Apr 2024  
**Tested** : 17 Apr 2024  
**Diagnosed** : 17 Apr 2024 - Wes Davis

**364 - ASCENDUM MACHINERY INC - MACON**  
 4807 HARRISON RD  
 MACON, GA  
 US 31206

Contact: PHILLIP CARVER  
 phillip.carver@ascendummachinery.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T: (478)200-3300  
 F: (478)200-5859