

WEAR CONTAMINATION FLUID CONDITION


NORMAL NORMAL NORMAL

Machine Id

24D1002 STERLING-8330

New (Unused) Oil

| RECOMMENDATION | Test | UOM | Method | Limit/Abn | Current | History1 | History2 |
|--|----------------------------|---------------|----------------------------|-----------|---------------|----------|----------|
| This is a baseline read-out on the submitted sample. | Sample Number | | Client Info | | HPL006564 | | |
| | Sample Date | | Client Info | | 12 Apr 2024 | | |
| | Machine Age | hrs | Client Info | | 0 | | |
| | Oil Age | hrs | Client Info | | 0 | | |
| | Filter Age | hrs | Client Info | | 0 | | |
| | Oil Changed | | Client Info | | N/A | | |
| | Filter Changed | | Client Info | | N/A | | |
| | Sample Status | | | | NORMAL | | |
| /EAD | | | | | | | |
| WEAR | Iron | ppm | ASTM D5185m | | 0 | | |
| | Chromium | ppm | ASTM D5185m | | 0 | | |
| | Nickel | ppm | ASTM D5185m | | 0 | | |
| | Titanium | ppm | ASTM D5185m | | 0 | | |
| | Silver | ppm | ASTM D5185m | | 0 | | |
| | Aluminum | ppm | ASTM D5185m | | 0 | | |
| | Lead | ppm | ASTM D5185m | | 0 | | |
| | Copper | ppm | ASTM D5185m | | 0 | | |
| | Tin Vanadium | ppm | ASTM D5185m ASTM D5185m | | 0 | | |
| | White Metal | ppm scalar | *Visual | NONE | NONE | | |
| | Yellow Metal | | *Visual | NONE | NONE | | |
| <u></u> | | scalar | Visuai | NONL | INONE | | |
| CONTAMINATION | Silicon | ppm | ASTM D5185m | | <1 | | |
| | Potassium | ppm | ASTM D5185m | >20 | 3 | | |
| | Water | | WC Method | | NEG | | |
| | Silt | scalar | *Visual | NONE | NONE | | |
| | Debris | scalar | *Visual | NONE | NONE | | |
| | Sand/Dirt | scalar | *Visual | NONE | NONE | | |
| | Appearance | scalar | *Visual | NORML | NORML | | |
| | Odor | scalar | *Visual | NORML | NORML | | |
| | Emulsified Water | scalar | *Visual | | NEG | | |
| FLUID CONDITION | Sodium | ppm | ASTM D5185m | | <1 | | |
| | Boron | ppm | ASTM D5185m | | 0 | | |
| | Barium | ppm | ASTM D5185m | | 0 | | |
| | Molybdenum | ppm | ASTM D5185m | | 0 | | |
| | Manganese | ppm | ASTM D5185m | | 0 | | |
| | Magnesium | ppm | ASTM D5185m | | 0 | | |
| | Calcium | ppm | ASTM D5185m | | <1 | | |
| | Phosphorus | ppm | ASTM D5185m | | 161 | | |
| | • | ppm | ASTM D5185m | | 0 | | |
| | Zinc | | ASTM D5185m | | 20543 | | |
| | Sulfur | ppm | | | | | |
| | | | ASTM D8045 | | 0.61 | | |
| | Sulfur | | | | 0.61 154.5 | | |
| | Sulfur Acid Number (AN) | mg KOH/g | ASTM D8045 | | | | |

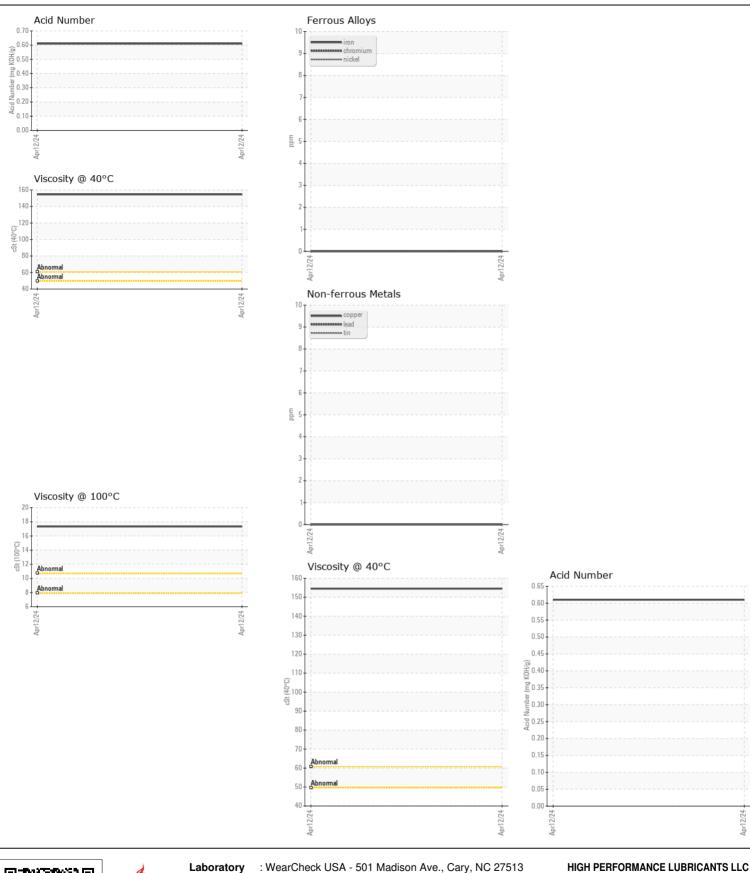





Certificate L2367

Laboratory Sample No. Unique Number : 10980915

Lab Number : 06150837

: HPL006564

: WearCheck USA - 501 Madison Ave., Cary, NC 27513 Received **Tested**

Diagnosed Test Package : MOB 2 (Additional Tests: FT-IR, KV100, PrtCount, VI)

: 19 Apr 2024 : 19 Apr 2024 - Jonathan Hester

: 16 Apr 2024

500 S SPRUCE ST MANTENO, IL US 60950 Contact: DAVID WARD sampledata@hplubricants.com

Submitted By: DAVID WARD

To discuss this sample report, contact Customer Service at 1-800-237-1369. * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

T: (815)468-3535

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

F: x: