



OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Area
{unassigned} [149781]
Machine Id
SKYTR 8042 0100041406
Component
Diesel Engine
Fluid
DIESEL ENGINE OIL SAE 15W40 (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor. Please specify the brand, type, and viscosity of the oil on your next sample.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		LEC0047545	LEC0011411	---
Sample Date		Client Info		12 Apr 2024	20 Jul 2020	---
Machine Age	hrs	Client Info		2336	2069	---
Oil Age	hrs	Client Info		267	0	---
Filter Age	hrs	Client Info		267	0	---
Oil Changed		Client Info		Changed	Changed	---
Filter Changed		Client Info		Changed	Changed	---
Sample Status				NORMAL	NORMAL	---

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>100	6	84	---
Chromium	ppm	ASTM D5185m	>20	<1	8	---
Nickel	ppm	ASTM D5185m	>4	0	<1	---
Titanium	ppm	ASTM D5185m		0	0	---
Silver	ppm	ASTM D5185m	>3	0	0	---
Aluminum	ppm	ASTM D5185m	>20	2	6	---
Lead	ppm	ASTM D5185m	>40	<1	2	---
Copper	ppm	ASTM D5185m	>330	0	2	---
Tin	ppm	ASTM D5185m	>15	<1	1	---
Vanadium	ppm	ASTM D5185m		<1	0	---
White Metal	scalar	*Visual	NONE	NONE	NONE	---
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	---

CONTAMINATION








There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>120	7	8	---
Potassium	ppm	ASTM D5185m	>20	7	5	---
Fuel		WC Method	>5	<1.0	<1.0	---
Water		WC Method	>0.2	NEG	NEG	---
Glycol		WC Method		NEG	NEG	---
Soot %	%	*ASTM D7844	>3	0.1	1.4	---
Nitration	Abs/cm	*ASTM D7624	>20	5.7	9.1	---
Sulfation	Abs/.1mm	*ASTM D7415	>30	19.6	24.3	---
Silt	scalar	*Visual	NONE	NONE	NONE	---
Debris	scalar	*Visual	NONE	NONE	NONE	---
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	NORML	---
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG	---

FLUID CONDITION

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m	>158	1	3	---
Boron	ppm	ASTM D5185m	250	278	440	---
Barium	ppm	ASTM D5185m	10	0	0	---
Molybdenum	ppm	ASTM D5185m	100	220	92	---
Manganese	ppm	ASTM D5185m		0	<1	---
Magnesium	ppm	ASTM D5185m	450	737	408	---
Calcium	ppm	ASTM D5185m	3000	1543	1682	---
Phosphorus	ppm	ASTM D5185m	1150	938	1034	---
Zinc	ppm	ASTM D5185m	1350	1072	1141	---
Sulfur	ppm	ASTM D5185m	4250	3733	4464	---
Oxidation	Abs/.1mm	*ASTM D7414	>25	14.0	17.7	---
Base Number (BN)	mg KOH/g	ASTM D2896	8.5	10.2	9.1	---
Visc @ 100°C	cSt	ASTM D445	14.4	14.3	14.7	---

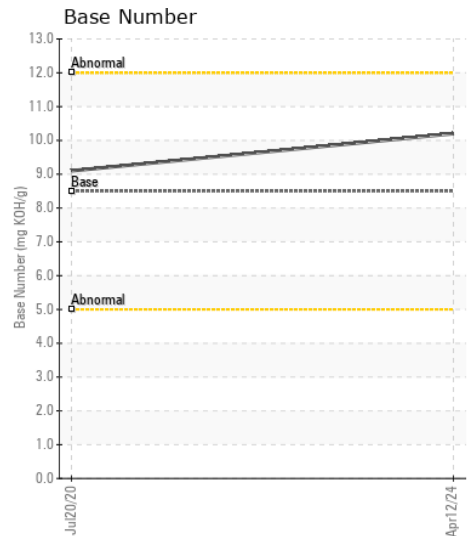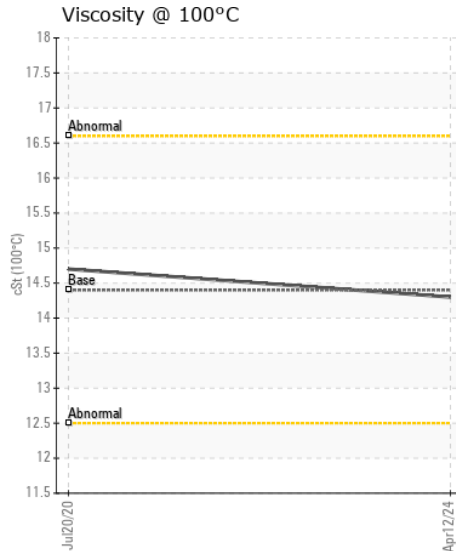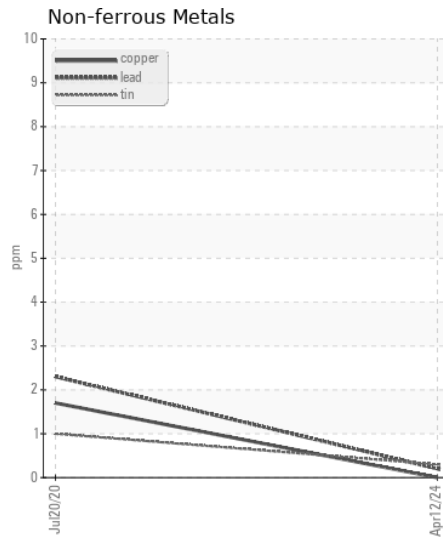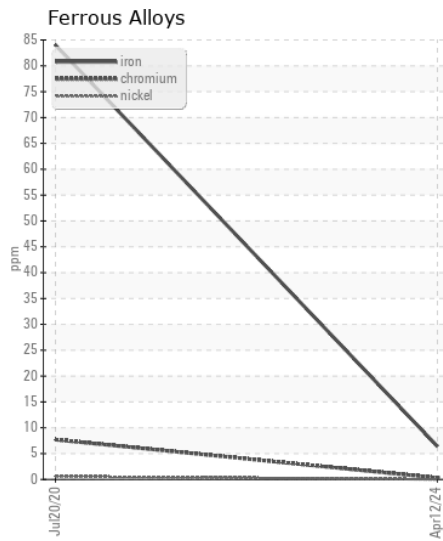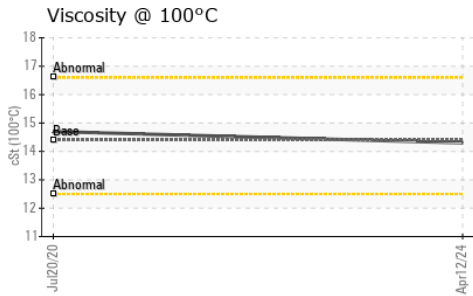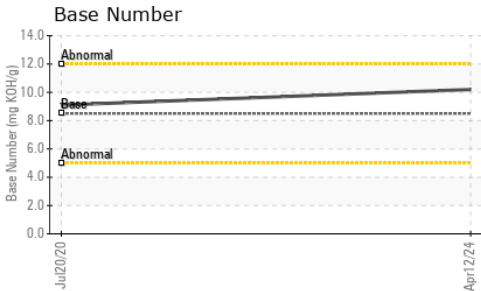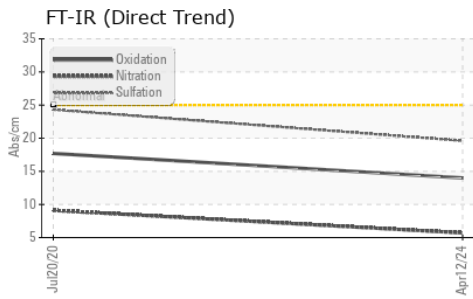

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513

Sample No. : LEC0047545

Lab Number : 06150886

Unique Number : 10980964

Test Package : CONST (Additional Tests: TBN)

Received : 16 Apr 2024

Tested : 17 Apr 2024

Diagnosed : 17 Apr 2024 - Wes Davis

LESLIE EQUIPMENT COMPANY

105 TENNIS CENTER DR.

MARIETTA, OH

US 45750-9765

Contact: LEANNE KENDALL

KendalLeanne@lec1.com

T:

F: (740)373-5570

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)