



WEAR	<b>NORMAL</b>
CONTAMINATION	<b>NORMAL</b>
FLUID CONDITION	<b>NORMAL</b>



Machine Id  
**428049-402356**  
Component  
**Diesel Engine**  
Fluid  
**PETRO CANADA DURON SHP 15W40 (--- GAL)**

**RECOMMENDATION**

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		<b>GFL0117751</b>	GFL0114495	GFL0103985
Sample Date		Client Info		<b>09 Apr 2024</b>	24 Feb 2024	06 Feb 2024
Machine Age	hrs	Client Info		<b>15877</b>	15771	15733
Oil Age	hrs	Client Info		<b>0</b>	15771	15733
Filter Age	hrs	Client Info		<b>0</b>	0	0
Oil Changed		Client Info		<b>Changed</b>	Not Changd	Changed
Filter Changed		Client Info		<b>Changed</b>	Not Changed	Changed
Sample Status				<b>NORMAL</b>	NORMAL	NORMAL

**WEAR**

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>120	<b>4</b>	3	12
Chromium	ppm	ASTM D5185m	>20	<b>&lt;1</b>	0	<1
Nickel	ppm	ASTM D5185m	>5	<b>0</b>	0	0
Titanium	ppm	ASTM D5185m	>2	<b>0</b>	0	<1
Silver	ppm	ASTM D5185m	>2	<b>0</b>	0	0
Aluminum	ppm	ASTM D5185m	>20	<b>1</b>	1	3
Lead	ppm	ASTM D5185m	>40	<b>&lt;1</b>	0	0
Copper	ppm	ASTM D5185m	>330	<b>&lt;1</b>	0	<1
Tin	ppm	ASTM D5185m	>15	<b>&lt;1</b>	0	<1
Vanadium	ppm	ASTM D5185m		<b>&lt;1</b>	0	<1
White Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE

**CONTAMINATION**

There is no indication of any contamination in the oil.


Silicon	ppm	ASTM D5185m	>25	<b>5</b>	5	13
Potassium	ppm	ASTM D5185m	>20	<b>15</b>	<1	4
Fuel		WC Method	>3.0	<b>&lt;1.0</b>	<1.0	<1.0
Water		WC Method	>0.2	<b>NEG</b>	NEG	NEG
Glycol		WC Method		<b>NEG</b>	NEG	NEG
Soot %	%	*ASTM D7844	>4	<b>0.1</b>	0.1	0.1
Nitration	Abs/cm	*ASTM D7624	>20	<b>5.6</b>	4.8	6.9
Sulfation	Abs/.1mm	*ASTM D7415	>30	<b>18.2</b>	18.0	18.9
Silt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Debris	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Appearance	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Odor	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	<b>NEG</b>	NEG	NEG

**FLUID CONDITION**


The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m		<b>3</b>	1	18
Boron	ppm	ASTM D5185m	0	<b>5</b>	7	4
Barium	ppm	ASTM D5185m	0	<b>0</b>	0	0
Molybdenum	ppm	ASTM D5185m	60	<b>55</b>	61	62
Manganese	ppm	ASTM D5185m	0	<b>0</b>	0	<1
Magnesium	ppm	ASTM D5185m	1010	<b>899</b>	1095	961
Calcium	ppm	ASTM D5185m	1070	<b>1132</b>	1256	1160
Phosphorus	ppm	ASTM D5185m	1150	<b>1046</b>	1246	1032
Zinc	ppm	ASTM D5185m	1270	<b>1216</b>	1521	1241
Sulfur	ppm	ASTM D5185m	2060	<b>3577</b>	3864	2974
Oxidation	Abs/.1mm	*ASTM D7414	>25	<b>14.5</b>	13.9	15.2
Base Number (BN)	mg KOH/g	ASTM D2896	9.8	<b>9.0</b>	8.9	8.4
Visc @ 100°C	cSt	ASTM D445	15.4	<b>14.2</b>	14.5	13.7


**FT-IR (Direct Trend)**

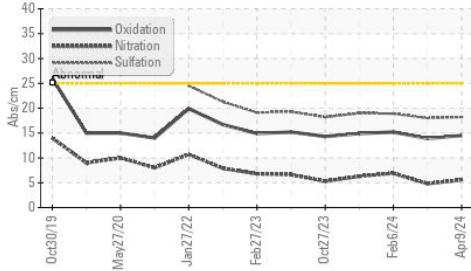


**Base Number**

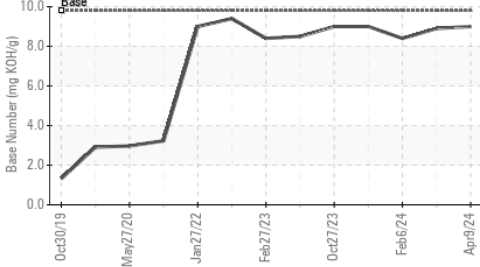


**Viscosity @ 100°C**

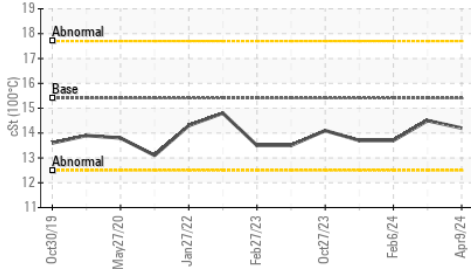


**Ferrous Alloys**

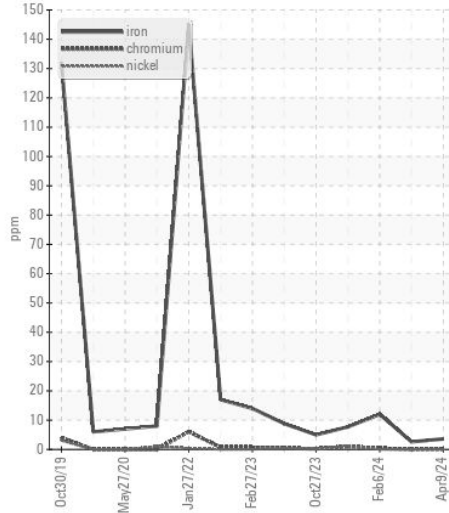


**Non-ferrous Metals**

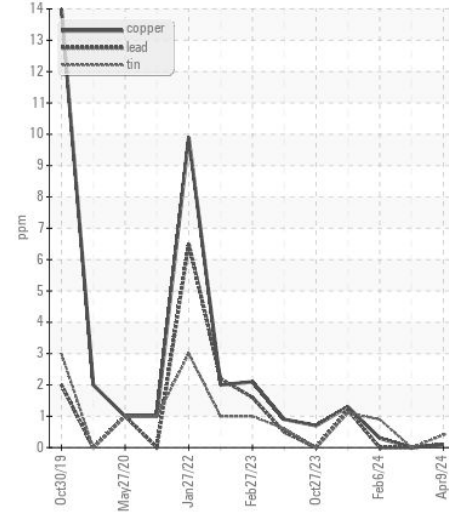

**Viscosity @ 100°C**

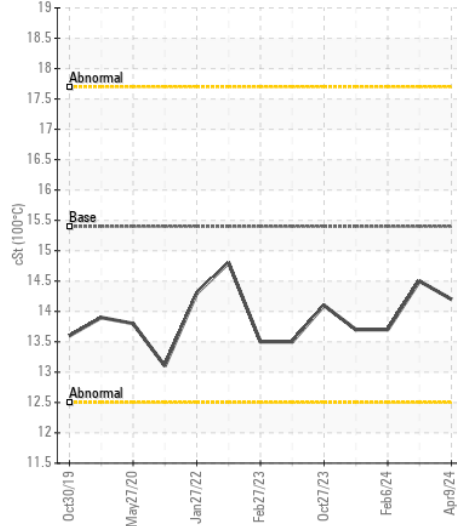

**Base Number**

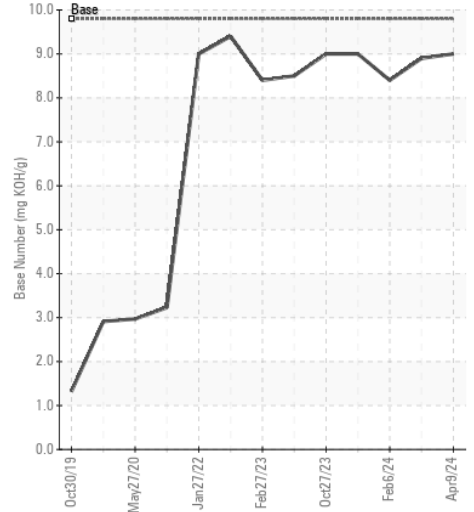

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : GFL0117751  
**Lab Number** : 06150923  
**Unique Number** : 10981001  
**Test Package** : FLEET

**Received** : 16 Apr 2024  
**Tested** : 17 Apr 2024  
**Diagnosed** : 17 Apr 2024 - Wes Davis

**GFL Environmental - 865 - East Mount Hauling**  
 7213 East Mount Houston Road  
 Houston, TX  
 US 77050  
 Contact: Saul Castillo  
 saul.castillo@gflenv.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:  
F: