



WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Machine Id
MR. LAMPTON
Component
Port Main Engine
Fluid
CHEVRON DELO 400 SDE SAE 15W40 (165 GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		MW0067376	MW0056581	MW0037127
Sample Date		Client Info		10 Apr 2024	01 Feb 2024	01 Feb 2024
Machine Age	hrs	Client Info		0	53716	53215
Oil Age	hrs	Client Info		1500	1000	500
Filter Age	hrs	Client Info		750	250	500
Oil Changed		Client Info		Changed	Not Changd	Not Changd
Filter Changed		Client Info		N/A	Not Changd	Not Changd
Sample Status				NORMAL	NORMAL	NORMAL

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>75	2	1	<1
Chromium	ppm	ASTM D5185m	>8	0	0	0
Nickel	ppm	ASTM D5185m	>2	0	0	0
Titanium	ppm	ASTM D5185m	>3	13	13	12
Silver	ppm	ASTM D5185m	>2	0	0	0
Aluminum	ppm	ASTM D5185m	>15	<1	1	1
Lead	ppm	ASTM D5185m	>18	<1	<1	0
Copper	ppm	ASTM D5185m	>80	<1	<1	0
Tin	ppm	ASTM D5185m	>14	<1	0	0
Vanadium	ppm	ASTM D5185m		<1	0	<1
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE

CONTAMINATION









There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>20	3	3	3
Potassium	ppm	ASTM D5185m	>20	14	2	2
Fuel		WC Method	>4.0	<1.0	<1.0	<1.0
Water		WC Method	>0.1	NEG	NEG	NEG
Glycol	%	*ASTM D2982		NEG	NEG	NEG
Soot %	%	*ASTM D7844		0.1	0.1	0.1
Nitration	Abs/cm	*ASTM D7624	>20	8.5	8.0	7.7
Sulfation	Abs/.1mm	*ASTM D7415	>30	19.1	18.6	18.8
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.1	NEG	NEG	NEG

FLUID CONDITION

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m	>75	4	1	2
Boron	ppm	ASTM D5185m		117	109	112
Barium	ppm	ASTM D5185m		0	0	0
Molybdenum	ppm	ASTM D5185m		36	35	34
Manganese	ppm	ASTM D5185m		0	<1	<1
Magnesium	ppm	ASTM D5185m		682	695	657
Calcium	ppm	ASTM D5185m		1499	1377	1318
Phosphorus	ppm	ASTM D5185m	760	676	680	660
Zinc	ppm	ASTM D5185m	800	768	752	739
Sulfur	ppm	ASTM D5185m	3000	3286	3239	2713
Oxidation	Abs/.1mm	*ASTM D7414	>25	14.3	13.4	13.3
Base Number (BN)	mg KOH/g	ASTM D2896	10	8.1	8.2	8.2
Visc @ 100°C	cSt	ASTM D445	14.6	13.6	13.7	13.8

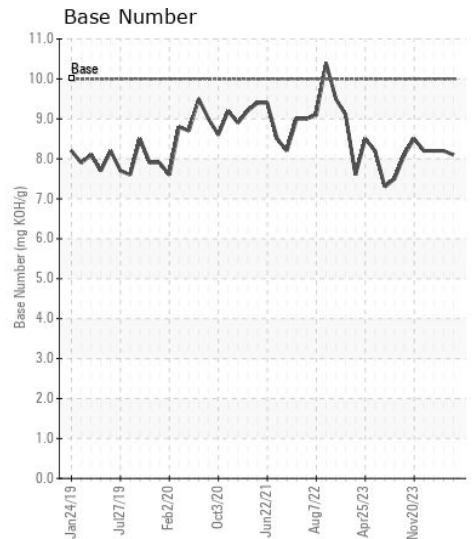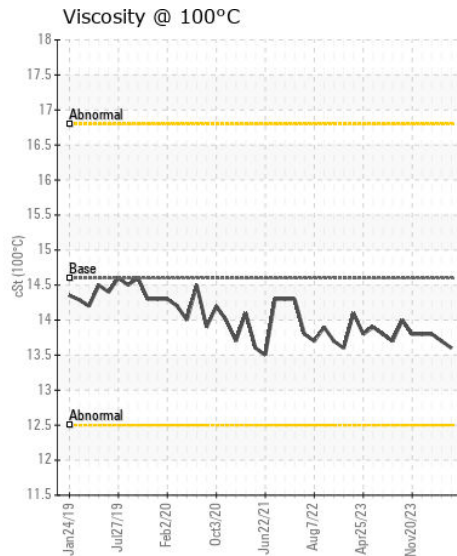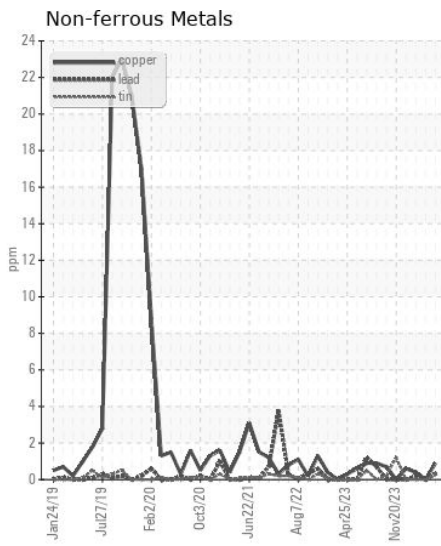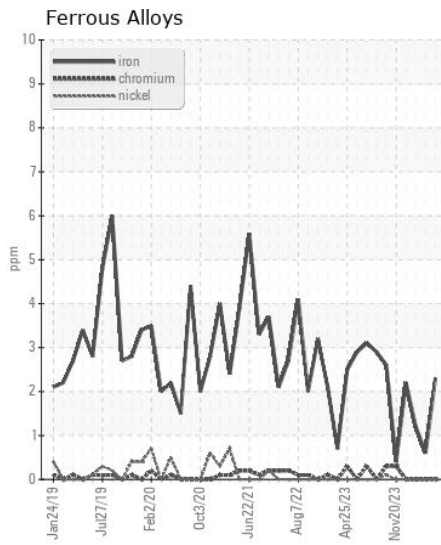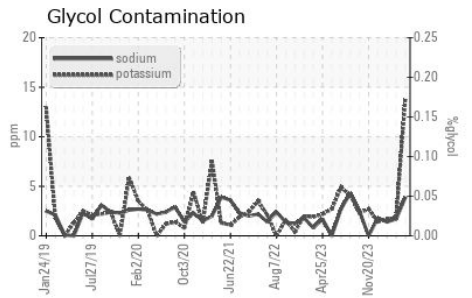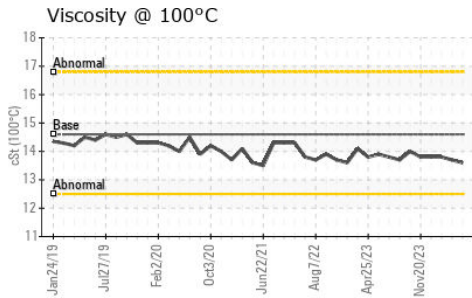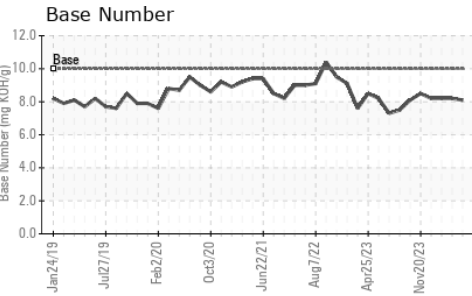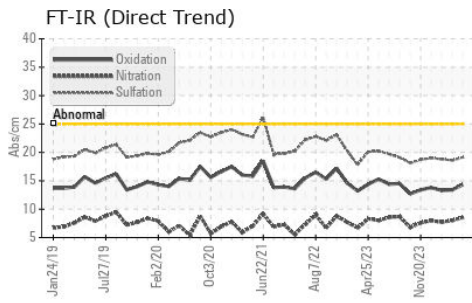

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : MW0067376
Lab Number : 06150945
Unique Number : 10981023
Test Package : MAR 2 (Additional Tests: Glycol)

MAGNOLIA MARINE TRANSPORT
 697 HAINING ROAD
 VICKSBURG, MS
 US 39183
 Contact: MMT MAINTENANCE PLANNERS
 mmtmaintenanceplanners@ergon.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.
 * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)