



WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL



Area
TALLASSEE
Machine Id
814046
Component
Diesel Engine
Fluid
PETRO CANADA DURON SHP 15W40 (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		GFL0080698	GFL0092440	GFL0081850
Sample Date		Client Info		11 Apr 2024	03 Apr 2024	01 Apr 2024
Machine Age	hrs	Client Info		733	664	640
Oil Age	hrs	Client Info		733	664	640
Filter Age	hrs	Client Info		0	664	0
Oil Changed		Client Info		N/A	Not Changd	N/A
Filter Changed		Client Info		N/A	Not Changd	N/A
Sample Status				NORMAL	NORMAL	ABNORMAL

WEAR

Metal levels are typical for a new component breaking in.

Iron	ppm	ASTM D5185m	>120	7	5	45
Chromium	ppm	ASTM D5185m	>20	<1	0	<1
Nickel	ppm	ASTM D5185m	>5	2	<1	12
Titanium	ppm	ASTM D5185m	>2	0	0	<1
Silver	ppm	ASTM D5185m	>2	<1	0	<1
Aluminum	ppm	ASTM D5185m	>20	1	<1	7
Lead	ppm	ASTM D5185m	>40	1	0	0
Copper	ppm	ASTM D5185m	>330	65	51	▲ 349
Tin	ppm	ASTM D5185m	>15	<1	0	3
Vanadium	ppm	ASTM D5185m		<1	0	0
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE

CONTAMINATION








There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>25	11	10	▲ 81
Potassium	ppm	ASTM D5185m	>20	17	2	12
Fuel		WC Method	>3.0	<1.0	<1.0	0.4
Water		WC Method	>0.2	NEG	NEG	NEG
Glycol		WC Method		NEG	NEG	NEG
Soot %	%	*ASTM D7844	>4	0.2	0.1	0.5
Nitration	Abs/cm	*ASTM D7624	>20	5.7	5.2	10.5
Sulfation	Abs/.1mm	*ASTM D7415	>30	18.8	18.2	24.3
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG	NEG

FLUID CONDITION

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m		4	2	2
Boron	ppm	ASTM D5185m	0	23	26	180
Barium	ppm	ASTM D5185m	0	0	0	0
Molybdenum	ppm	ASTM D5185m	60	64	66	123
Manganese	ppm	ASTM D5185m	0	<1	<1	5
Magnesium	ppm	ASTM D5185m	1010	910	1033	720
Calcium	ppm	ASTM D5185m	1070	1111	1203	1462
Phosphorus	ppm	ASTM D5185m	1150	962	1101	682
Zinc	ppm	ASTM D5185m	1270	1182	1317	803
Sulfur	ppm	ASTM D5185m	2060	3512	4170	2295
Oxidation	Abs/.1mm	*ASTM D7414	>25	14.7	14.4	23.1
Base Number (BN)	mg KOH/g	ASTM D2896	9.8	8.7	9.0	7.0
Visc @ 100°C	cSt	ASTM D445	15.4	13.7	13.8	● 10.1

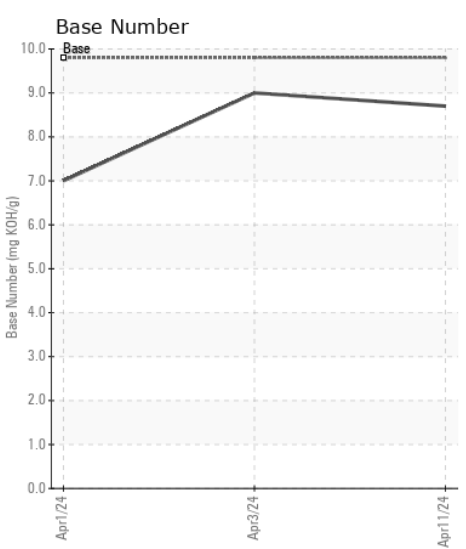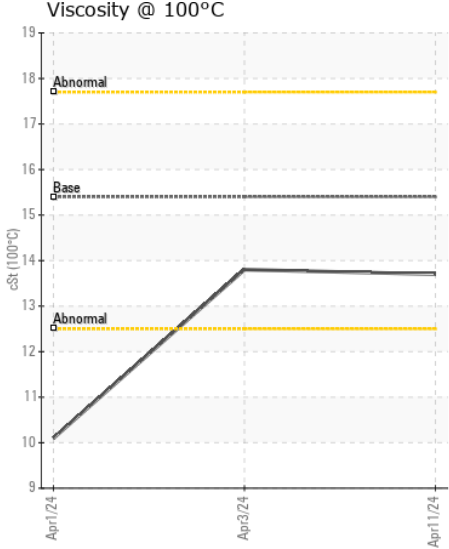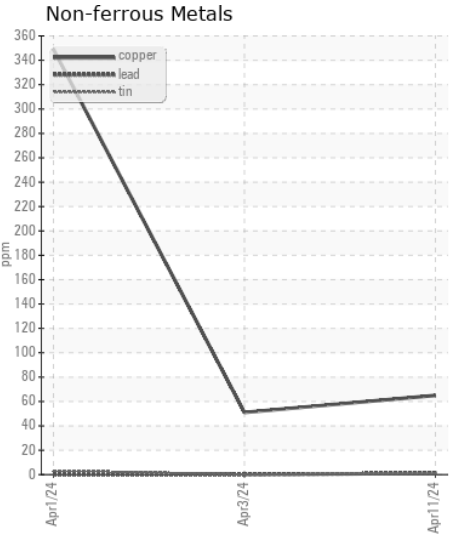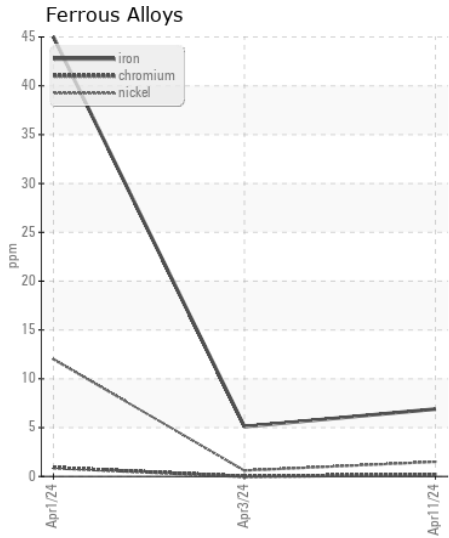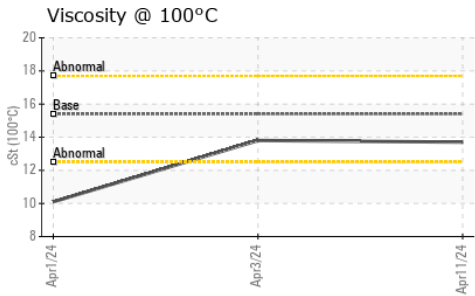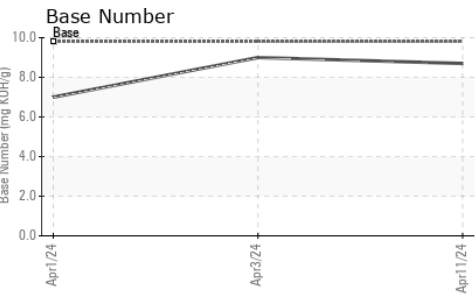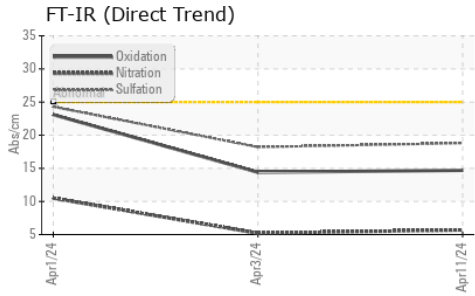

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : GFL0080698 **Received** : 16 Apr 2024
Lab Number : 06150987 **Tested** : 17 Apr 2024
Unique Number : 10981065 **Diagnosed** : 17 Apr 2024 - Wes Davis
Test Package : FLEET

GFL Environmental - 172 - Montgomery-Alexander City-Tallahassee
 Multiple Sites
 Montgomery, AL
 US 36108
 Contact: BRANDON HURST
 brandonhurst@gflenv.com
 T:
 F:

Certificate L2367
 To discuss this sample report, contact Customer Service at 1-800-237-1369.
 * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)