



OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	ABNORMAL
FLUID CONDITION	NORMAL

Machine Id
DESCORIADORA
 Component
Hydraulic System
 Fluid
{not provided} (--- QTS)

RECOMMENDATION

No corrective action is recommended at this time. Resample at the next service interval to monitor.

WEAR

All component wear rates are normal.











CONTAMINATION

There is a high amount of silt (particulates < 14 microns in size) present in the oil.

FLUID CONDITION

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		AN06151124	AN05889026	AN05889040
Sample Date		Client Info		29 Nov 2023	02 Jun 2023	27 Apr 2023
Machine Age	hrs	Client Info		0	0	0
Oil Age	hrs	Client Info		0	0	0
Filter Age	hrs	Client Info		0	0	0
Oil Changed		Client Info		N/A	N/A	N/A
Filter Changed		Client Info		N/A	N/A	N/A
Sample Status				ABNORMAL	SEVERE	SEVERE
Iron	ppm	ASTM D5185m	>20	4	▲ 22	18
Chromium	ppm	ASTM D5185m	>20	0	<1	<1
Nickel	ppm	ASTM D5185m	>20	<1	0	0
Titanium	ppm	ASTM D5185m		0	0	0
Silver	ppm	ASTM D5185m		0	0	0
Aluminum	ppm	ASTM D5185m	>20	<1	0	0
Lead	ppm	ASTM D5185m	>20	0	0	0
Copper	ppm	ASTM D5185m	>20	4	4	4
Tin	ppm	ASTM D5185m	>20	<1	<1	<1
Vanadium	ppm	ASTM D5185m		0	0	0
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Silicon	ppm	ASTM D5185m	>15	1	3	2
Potassium	ppm	ASTM D5185m	>20	2	<1	<1
Water	%	ASTM D6304	>0.05	0.005	0.073	0.082
ppm Water	ppm	ASTM D6304	>500	59	733.2	823.4
Particles >4µm		ASTM D7647	>5000	▲ 19288	▲ 35717	▲ 34427
Particles >6µm		ASTM D7647	>1300	● 2215	▲ 4202	▲ 3147
Particles >14µm		ASTM D7647	>160	52	104	55
Particles >21µm		ASTM D7647	>40	9	25	9
Particles >38µm		ASTM D7647	>10	0	2	1
Particles >71µm		ASTM D7647	>3	0	1	1
Oil Cleanliness		ISO 4406 (c)	>19/17/14	▲ 21/18/13	▲ 22/19/14	▲ 22/19/13
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	LIGHT	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.05	NEG	NEG	NEG
Sodium	ppm	ASTM D5185m		2	6	6
Boron	ppm	ASTM D5185m		0	4	0
Barium	ppm	ASTM D5185m		0	0	0
Molybdenum	ppm	ASTM D5185m		0	0	0
Manganese	ppm	ASTM D5185m		1	<1	<1
Magnesium	ppm	ASTM D5185m		<1	<1	<1
Calcium	ppm	ASTM D5185m		50	14	13
Phosphorus	ppm	ASTM D5185m		344	225	219
Zinc	ppm	ASTM D5185m		435	7	5
Sulfur	ppm	ASTM D5185m		3977	2585	2526
Acid Number (AN)	mg KOH/g	ASTM D8045		0.76	▲ 3.45	▲ 3.48
Visc @ 40°C	cSt	ASTM D445		63.0	60.1	▲ 58.5

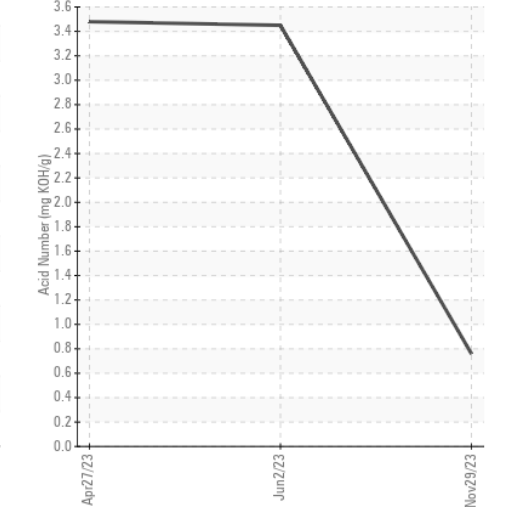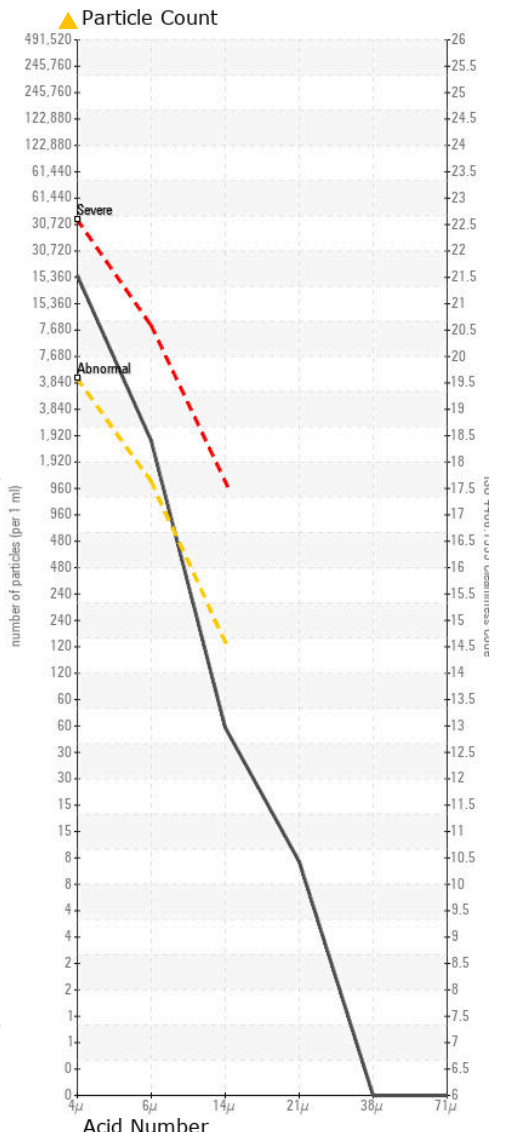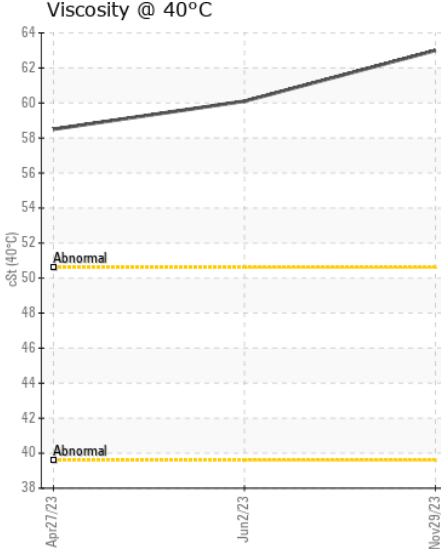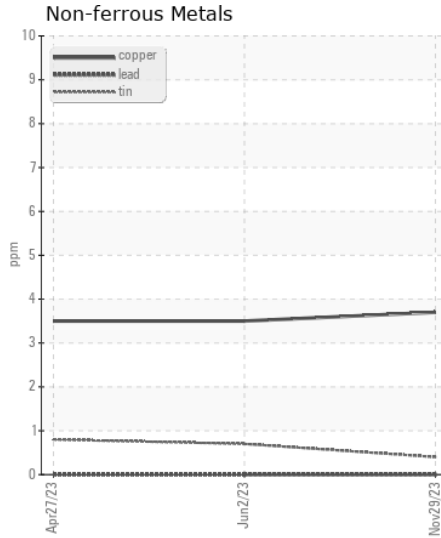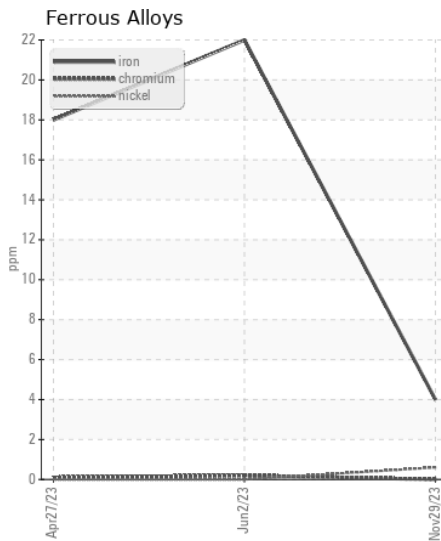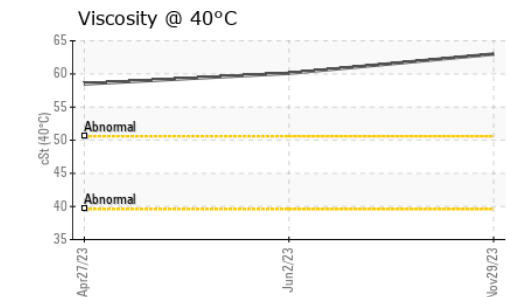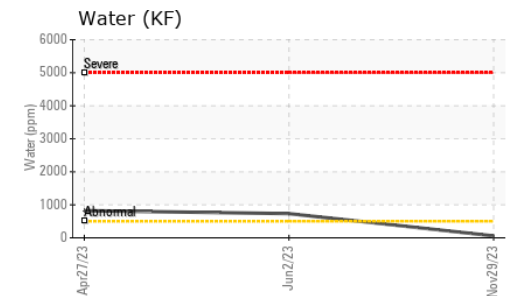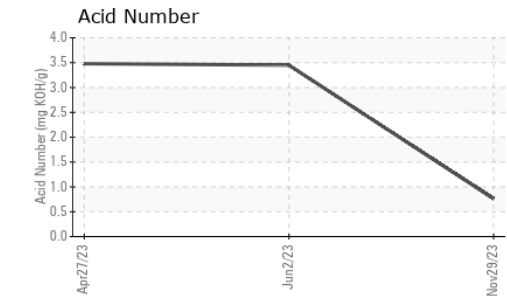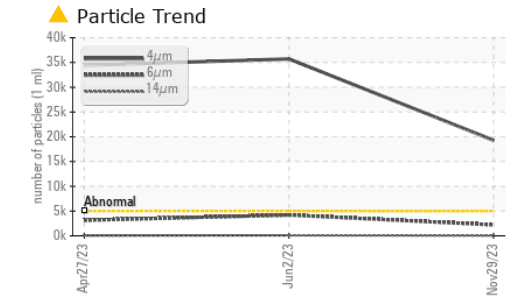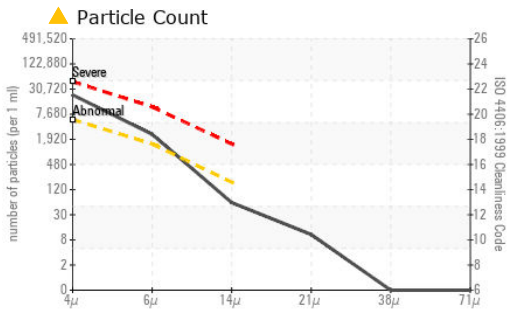

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : AN06151124 **Received** : 16 Apr 2024
Lab Number : 06151124 **Tested** : 19 Apr 2024
Unique Number : 10981202 **Diagnosed** : 19 Apr 2024 - Jonathan Hester
Test Package : IND 2 (Additional Tests: PrtCount)

CONEXO INC
 2320 STARR LAKE DRIVE
 ACWORTH, GA
 US 30101
 Contact: RICARDO HEIN
 rhein@conexoinc.com
 T: (678)806-0131
 F: x:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)