



OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	ATTENTION
FLUID CONDITION	NORMAL

Machine Id
CARRO PORTA / TUNDISH 2
 Component
Hydraulic System
 Fluid
ANDEROL BIO GUARD FRHF 46 (--- QTS)

RECOMMENDATION

No corrective action is recommended at this time. Resample at the next service interval to monitor.

WEAR

All component wear rates are normal.











CONTAMINATION

There is a moderate amount of silt (particulates < 6 microns in size) present in the oil.

FLUID CONDITION

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		AN06151131	AN06151119	AN06151107
Sample Date		Client Info		12 Mar 2024	23 Feb 2024	16 Jan 2024
Machine Age	hrs	Client Info		0	0	0
Oil Age	hrs	Client Info		0	0	0
Filter Age	hrs	Client Info		0	0	0
Oil Changed		Client Info		N/A	N/A	N/A
Filter Changed		Client Info		N/A	N/A	N/A
Sample Status				ATTENTION	ABNORMAL	---
Iron	ppm	ASTM D5185m	>20	3	3	3
Chromium	ppm	ASTM D5185m	>20	0	0	0
Nickel	ppm	ASTM D5185m	>20	<1	<1	1
Titanium	ppm	ASTM D5185m		0	0	0
Silver	ppm	ASTM D5185m		0	0	0
Aluminum	ppm	ASTM D5185m	>20	<1	<1	1
Lead	ppm	ASTM D5185m	>20	<1	<1	<1
Copper	ppm	ASTM D5185m	>20	6	6	6
Tin	ppm	ASTM D5185m	>20	<1	<1	1
Vanadium	ppm	ASTM D5185m		0	0	0
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Silicon	ppm	ASTM D5185m	>15	0	<1	<1
Potassium	ppm	ASTM D5185m	>20	2	2	3
Water	%	ASTM D6304	>0.05	0.041	0.041	0.044
ppm Water	ppm	ASTM D6304	>500	412	413	445
Particles >4µm		ASTM D7647	>5000	8135	▲ 12779	2034
Particles >6µm		ASTM D7647	>1300	363	843	295
Particles >14µm		ASTM D7647	>160	7	41	32
Particles >21µm		ASTM D7647	>40	2	14	12
Particles >38µm		ASTM D7647	>10	0	1	1
Particles >71µm		ASTM D7647	>3	0	0	0
Oil Cleanliness		ISO 4406 (c)	>19/17/14	20/16/10	▲ 21/17/13	18/15/12
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	LIGHT	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.05	NEG	NEG	NEG
Sodium	ppm	ASTM D5185m		2	1	2
Boron	ppm	ASTM D5185m		0	0	0
Barium	ppm	ASTM D5185m		0	0	0
Molybdenum	ppm	ASTM D5185m		0	0	0
Manganese	ppm	ASTM D5185m		1	1	1
Magnesium	ppm	ASTM D5185m		1	1	1
Calcium	ppm	ASTM D5185m		1	2	2
Phosphorus	ppm	ASTM D5185m	196	215	215	212
Zinc	ppm	ASTM D5185m		7	7	7
Sulfur	ppm	ASTM D5185m	1440	5014	4530	4997
Acid Number (AN)	mg KOH/g	ASTM D8045	1	1.96	1.82	1.84
Visc @ 40°C	cSt	ASTM D445	45.41	48.7	48.9	▲ 53.2

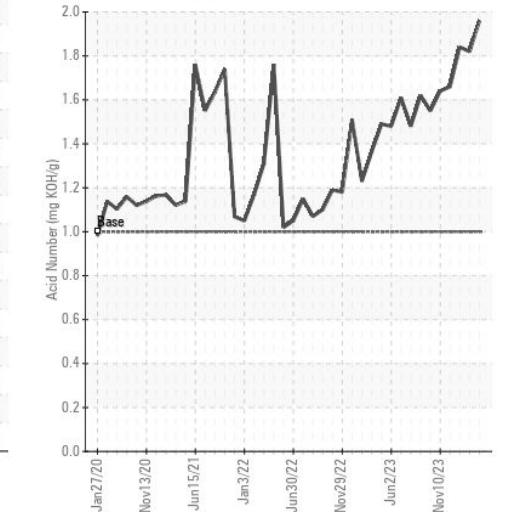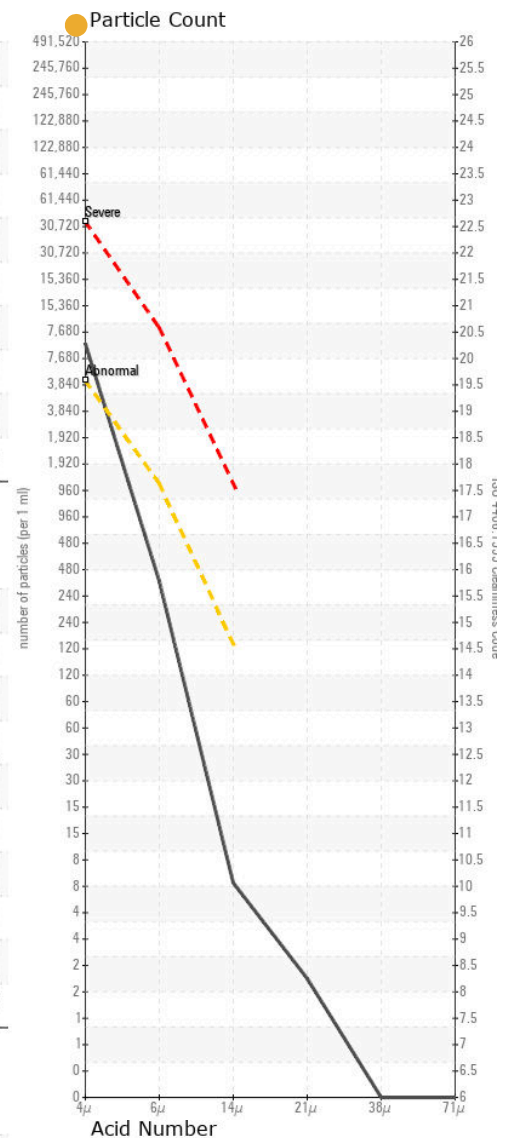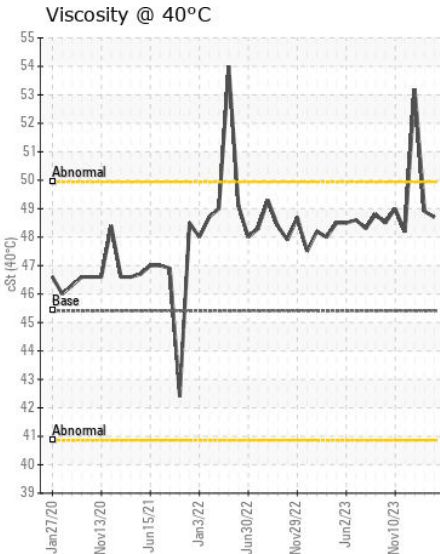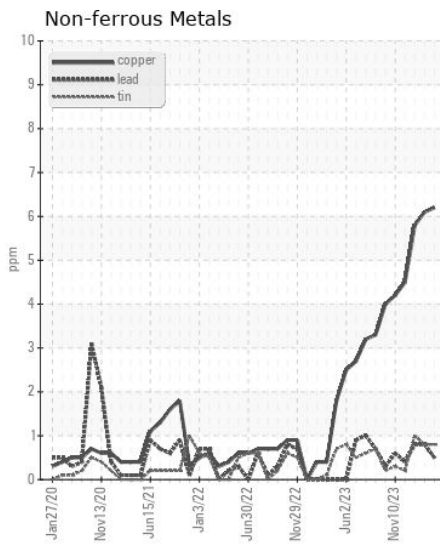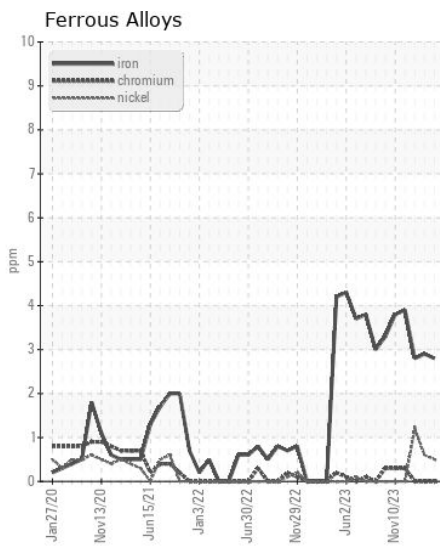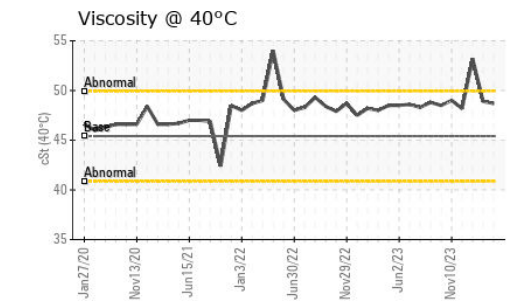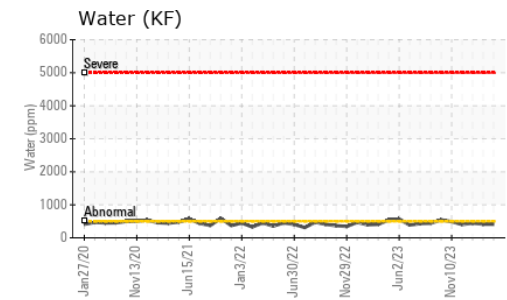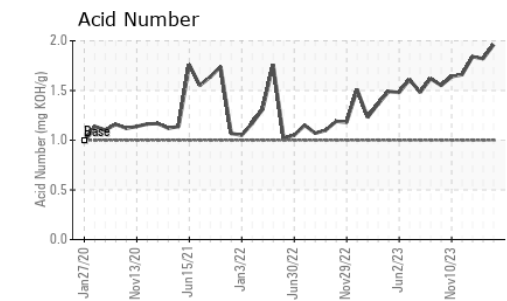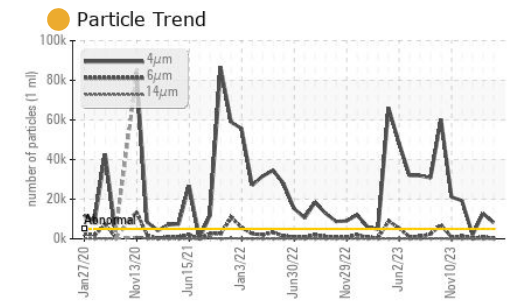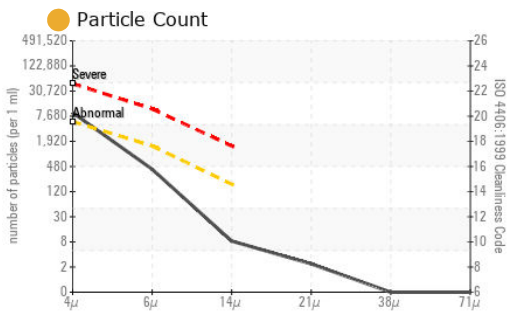

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : AN06151131
Lab Number : 06151131
Unique Number : 10981209
Test Package : IND 2 (Additional Tests: PrtCount)

Received : 16 Apr 2024
Tested : 19 Apr 2024
Diagnosed : 19 Apr 2024 - Jonathan Hester

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

CONEXO INC
 2320 STARR LAKE DRIVE
 ACWORTH, GA
 US 30101
 Contact: RICARDO HEIN
 rhein@conexoinc.com
 T: (678)806-0131
 F: x: