



OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	ABNORMAL
FLUID CONDITION	NORMAL

Machine Id
TAPONADORA
 Component
Hydraulic System
 Fluid
FIRE-RESISTANT FLUID ISO 46 (--- GAL)

RECOMMENDATION

We recommend you service the filters on this component if applicable. Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		AN06151135	AN06151111	AN06060275
Sample Date		Client Info		12 Mar 2024	16 Jan 2024	13 Dec 2023
Machine Age	hrs	Client Info		0	0	0
Oil Age	hrs	Client Info		0	0	0
Filter Age	hrs	Client Info		0	0	0
Oil Changed		Client Info		N/A	N/A	N/A
Filter Changed		Client Info		N/A	N/A	N/A
Sample Status				ABNORMAL	ABNORMAL	ABNORMAL

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>20	1	1	<1
Chromium	ppm	ASTM D5185m	>20	<1	0	<1
Nickel	ppm	ASTM D5185m	>20	<1	<1	0
Titanium	ppm	ASTM D5185m		0	0	0
Silver	ppm	ASTM D5185m		<1	0	0
Aluminum	ppm	ASTM D5185m	>20	<1	<1	2
Lead	ppm	ASTM D5185m	>20	0	<1	0
Copper	ppm	ASTM D5185m	>20	2	2	<1
Tin	ppm	ASTM D5185m	>20	4	4	2
Vanadium	ppm	ASTM D5185m		0	0	0
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE

CONTAMINATION











There is a high amount of silt (particulates < 14 microns in size) present in the oil.

Silicon	ppm	ASTM D5185m	>15	<1	0	<1
Potassium	ppm	ASTM D5185m	>20	3	2	<1
Water	%	ASTM D6304	>55	0.037	0.040	0.040
ppm Water	ppm	ASTM D6304	>55000	373	405	409
Particles >4µm		ASTM D7647	>5000	38740	33220	21627
Particles >6µm		ASTM D7647	>1300	1822	1772	1055
Particles >14µm		ASTM D7647	>160	14	32	47
Particles >21µm		ASTM D7647	>40	2	8	15
Particles >38µm		ASTM D7647	>10	0	1	0
Particles >71µm		ASTM D7647	>3	0	0	0
Oil Cleanliness		ISO 4406 (c)	>19/17/14	22/18/11	22/18/12	22/17/13
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	LIGHT	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>55	NEG	NEG	NEG

FLUID CONDITION

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m		2	2	1
Boron	ppm	ASTM D5185m	5	0	0	0
Barium	ppm	ASTM D5185m	5	<1	0	0
Molybdenum	ppm	ASTM D5185m	5	0	0	0
Manganese	ppm	ASTM D5185m		1	1	0
Magnesium	ppm	ASTM D5185m	5	3	1	<1
Calcium	ppm	ASTM D5185m	50	2	1	<1
Phosphorus	ppm	ASTM D5185m	175	189	206	238
Zinc	ppm	ASTM D5185m	62	0	0	0
Sulfur	ppm	ASTM D5185m	500	2105	2228	1916
Acid Number (AN)	mg KOH/g	ASTM D8045	3.63	1.18	1.14	1.08
Visc @ 40°C	cSt	ASTM D445	46	48.6	48.7	48.4

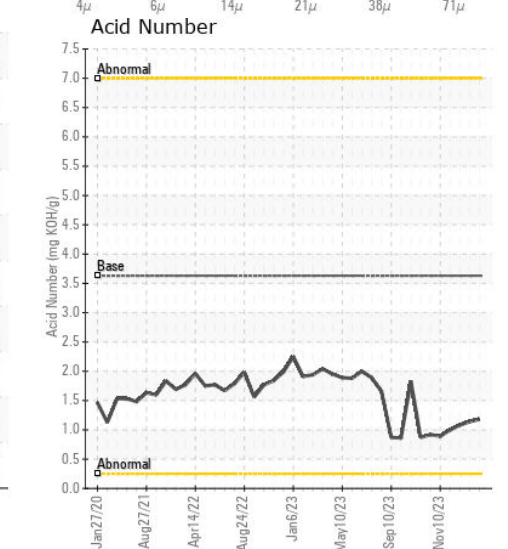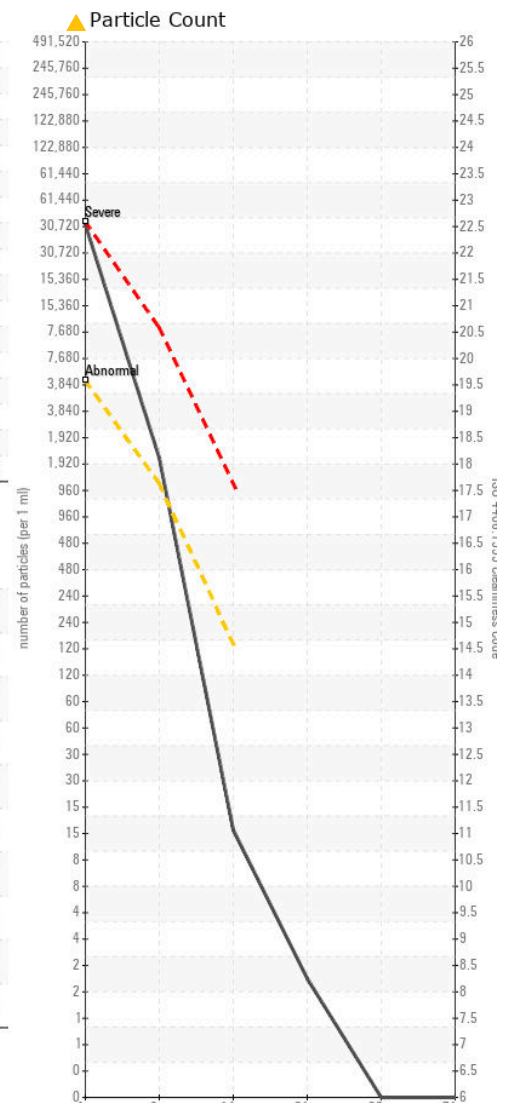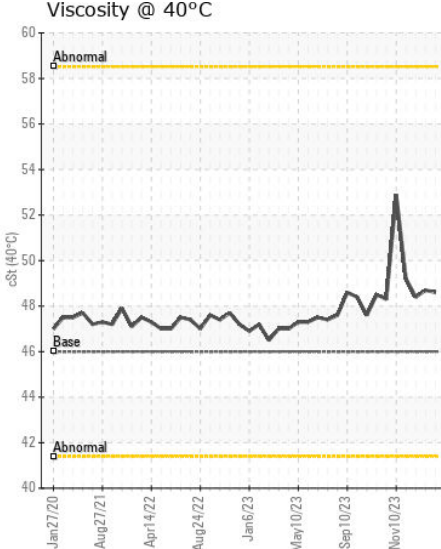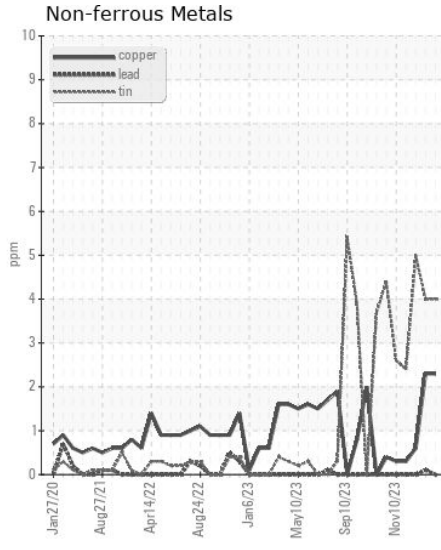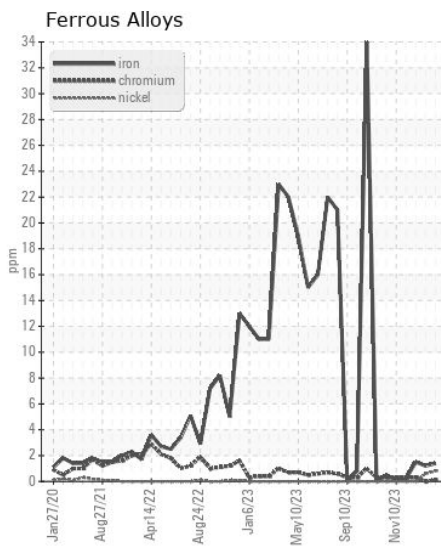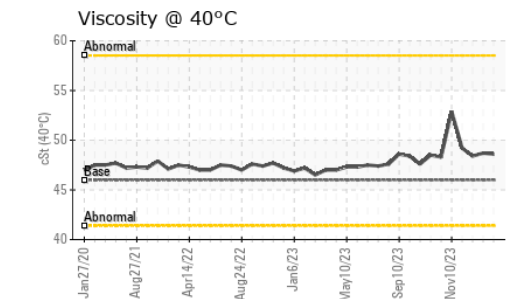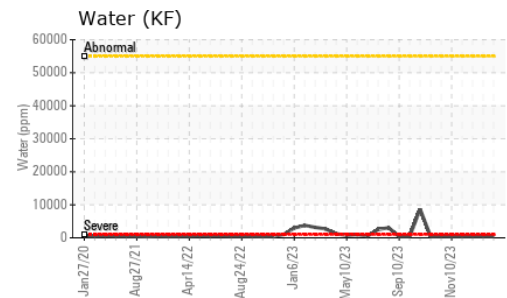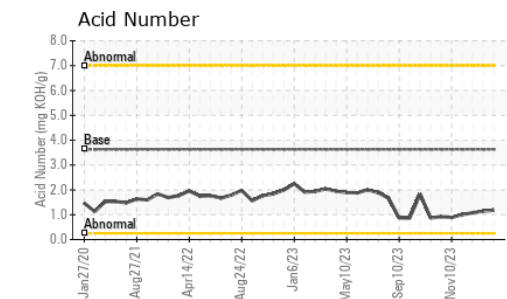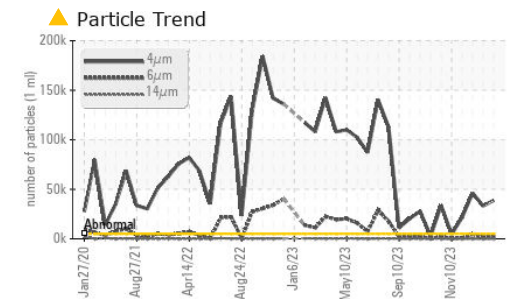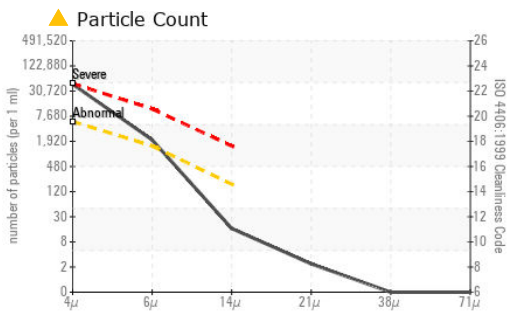

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : AN06151135 **Received** : 16 Apr 2024
Lab Number : 06151135 **Tested** : 19 Apr 2024
Unique Number : 10981213 **Diagnosed** : 19 Apr 2024 - Jonathan Hester
Test Package : IND 2 (Additional Tests: pH, PrtCount, ReserveAlk)

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

CONEXO INC
 2320 STARR LAKE DRIVE
 ACWORTH, GA
 US 30101
 Contact: RICARDO HEIN
 rhein@conexoinc.com
 T: (678)806-0131
 F: x: