



|                 |               |
|-----------------|---------------|
| WEAR            | <b>NORMAL</b> |
| CONTAMINATION   | <b>NORMAL</b> |
| FLUID CONDITION | <b>NORMAL</b> |

Area  
**JOHN R INGRAM**  
Machine Id  
[**JOHN R INGRAM**] 005 531157-5  
Component  
Center Reduction Gear  
Fluid  
**CHEVRON MEROPA 320 (150 GAL)**

**RECOMMENDATION**

Resample at the next service interval to monitor.

| Test           | UOM | Method      | Limit/Abn | Current            | History1    | History2    |
|----------------|-----|-------------|-----------|--------------------|-------------|-------------|
| Sample Number  |     | Client Info |           | <b>MW06151277</b>  | MW06128755  | MW06096380  |
| Sample Date    |     | Client Info |           | <b>01 Apr 2024</b> | 01 Mar 2024 | 01 Feb 2024 |
| Machine Age    | hrs | Client Info |           | <b>61009</b>       | 60276       | 59583       |
| Oil Age        | hrs | Client Info |           | <b>285</b>         | 260         | 59583       |
| Filter Age     | hrs | Client Info |           | <b>0</b>           | 0           | 0           |
| Oil Changed    |     | Client Info |           | <b>N/A</b>         | N/A         | N/A         |
| Filter Changed |     | Client Info |           | <b>N/A</b>         | N/A         | N/A         |
| Sample Status  |     |             |           | <b>NORMAL</b>      | NORMAL      | NORMAL      |

**WEAR**

All component wear rates are normal.

|              |        |             |      |              |      |      |
|--------------|--------|-------------|------|--------------|------|------|
| Iron         | ppm    | ASTM D5185m | >150 | <b>21</b>    | 20   | 22   |
| Chromium     | ppm    | ASTM D5185m | >10  | <b>&lt;1</b> | 0    | <1   |
| Nickel       | ppm    | ASTM D5185m | >10  | <b>0</b>     | 0    | <1   |
| Titanium     | ppm    | ASTM D5185m |      | <b>0</b>     | 0    | <1   |
| Silver       | ppm    | ASTM D5185m |      | <b>0</b>     | 0    | <1   |
| Aluminum     | ppm    | ASTM D5185m | >25  | <b>1</b>     | <1   | 2    |
| Lead         | ppm    | ASTM D5185m | >100 | <b>1</b>     | <1   | 1    |
| Copper       | ppm    | ASTM D5185m | >50  | <b>4</b>     | 3    | 4    |
| Tin          | ppm    | ASTM D5185m | >10  | <b>0</b>     | 0    | 0    |
| Vanadium     | ppm    | ASTM D5185m |      | <b>0</b>     | 0    | 0    |
| White Metal  | scalar | *Visual     | NONE | <b>NONE</b>  | NONE | NONE |
| Yellow Metal | scalar | *Visual     | NONE | <b>NONE</b>  | NONE | NONE |

**CONTAMINATION**







There is no indication of any contamination in the oil.

|                  |        |             |       |              |       |       |
|------------------|--------|-------------|-------|--------------|-------|-------|
| Silicon          | ppm    | ASTM D5185m | >50   | <b>1</b>     | <1    | 1     |
| Potassium        | ppm    | ASTM D5185m | >20   | <b>2</b>     | <1    | 2     |
| Water            |        | WC Method   | >0.1  | <b>NEG</b>   | NEG   | NEG   |
| Silt             | scalar | *Visual     | NONE  | <b>NONE</b>  | NONE  | NONE  |
| Debris           | scalar | *Visual     | NONE  | <b>NONE</b>  | NONE  | NONE  |
| Sand/Dirt        | scalar | *Visual     | NONE  | <b>NONE</b>  | NONE  | NONE  |
| Appearance       | scalar | *Visual     | NORML | <b>NORML</b> | NORML | NORML |
| Odor             | scalar | *Visual     | NORML | <b>NORML</b> | NORML | NORML |
| Emulsified Water | scalar | *Visual     | >0.1  | <b>NEG</b>   | NEG   | NEG   |

**FLUID CONDITION**

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

|                  |          |             |      |             |      |      |
|------------------|----------|-------------|------|-------------|------|------|
| Sodium           | ppm      | ASTM D5185m |      | <b>2</b>    | 3    | 0    |
| Boron            | ppm      | ASTM D5185m | 20   | <b>13</b>   | 13   | 14   |
| Barium           | ppm      | ASTM D5185m |      | <b>0</b>    | 0    | 0    |
| Molybdenum       | ppm      | ASTM D5185m | 0    | <b>1</b>    | <1   | 1    |
| Manganese        | ppm      | ASTM D5185m |      | <b>0</b>    | 0    | <1   |
| Magnesium        | ppm      | ASTM D5185m |      | <b>15</b>   | 11   | 14   |
| Calcium          | ppm      | ASTM D5185m | 25   | <b>85</b>   | 83   | 77   |
| Phosphorus       | ppm      | ASTM D5185m | 235  | <b>321</b>  | 305  | 303  |
| Zinc             | ppm      | ASTM D5185m |      | <b>52</b>   | 40   | 32   |
| Sulfur           | ppm      | ASTM D5185m |      | <b>6209</b> | 7720 | 6201 |
| Acid Number (AN) | mg KOH/g | ASTM D8045  | 0.56 | <b>0.76</b> | 0.76 | 0.83 |
| Visc @ 40°C      | cSt      | ASTM D445   | 304  | <b>309</b>  | 309  | 308  |

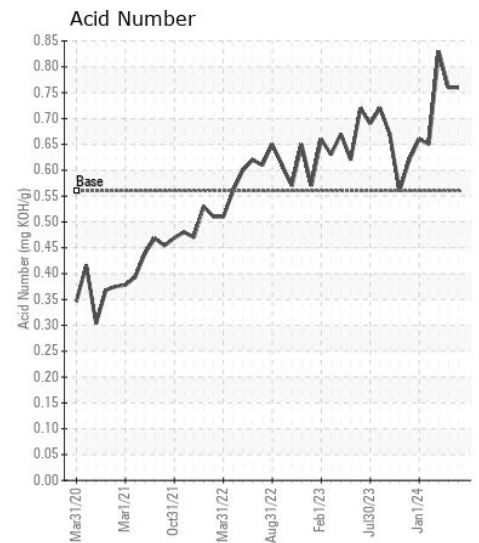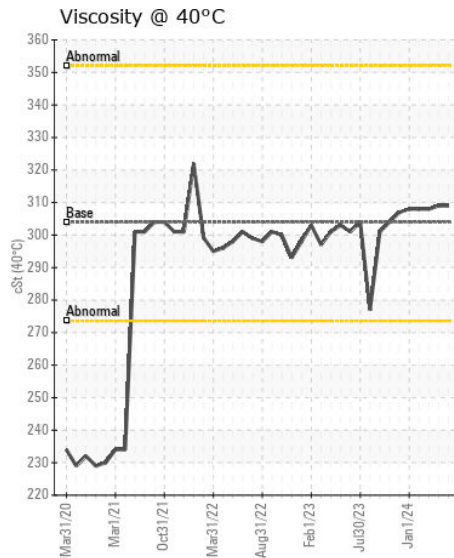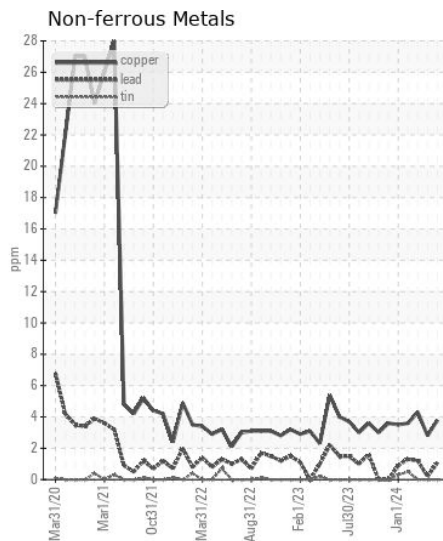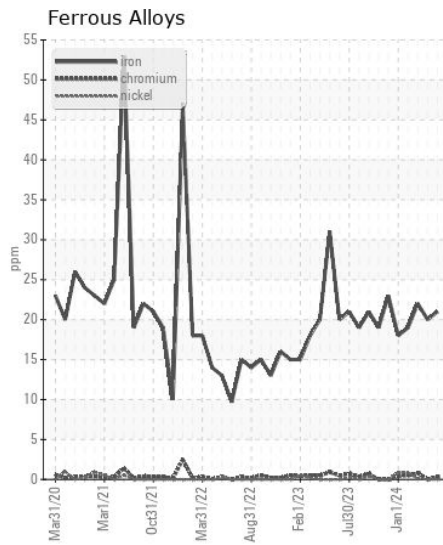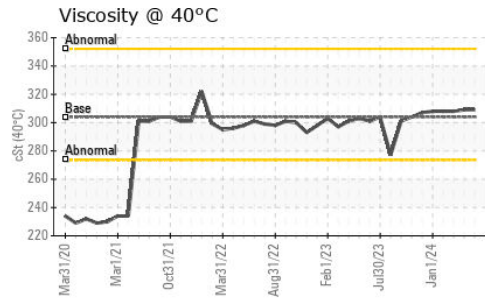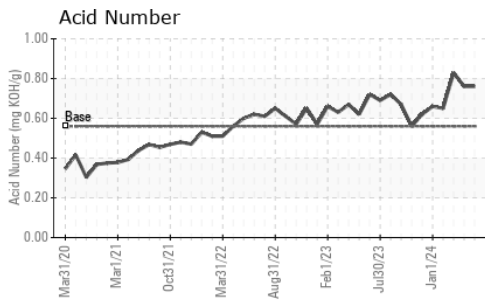

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513

**Sample No.** : MW06151277

**Lab Number** : 06151277

**Unique Number** : 10981355

**Test Package** : MAR 2

**Received** : 16 Apr 2024

**Tested** : 18 Apr 2024

**Diagnosed** : 18 Apr 2024 - Wes Davis

**INGRAM BARGE**

900 S 3RD ST

PADUCAH, KY

US 42003

Contact: ANTHONY VAN CURA

anthony.vancura@ingrambarga.com

T: (270)415-4467

F: (615)695-3697

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)