



LUBE PLUS+

OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Machine Id
FREIGHTLINER H-3
Component
Diesel Engine
Fluid
10W30 DURON SEMI (--- QTS)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		LP0001218	LP0000569	LP0000056
Sample Date		Client Info		10 Apr 2024	07 Sep 2023	13 Jun 2023
Machine Age	hrs	Client Info		4142	3049	61262
Oil Age	hrs	Client Info		517	400	396
Filter Age	hrs	Client Info		517	400	396
Oil Changed		Client Info		Changed	Changed	Changed
Filter Changed		Client Info		Changed	Changed	Changed
Sample Status				NORMAL	NORMAL	NORMAL

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>100	24	29	25
Chromium	ppm	ASTM D5185m	>20	2	2	2
Nickel	ppm	ASTM D5185m	>4	0	0	<1
Titanium	ppm	ASTM D5185m		0	<1	1
Silver	ppm	ASTM D5185m	>3	0	0	0
Aluminum	ppm	ASTM D5185m	>20	11	19	17
Lead	ppm	ASTM D5185m	>40	0	0	0
Copper	ppm	ASTM D5185m	>330	<1	<1	1
Tin	ppm	ASTM D5185m	>15	0	0	<1
Vanadium	ppm	ASTM D5185m		0	0	0
White Metal	scalar	*Visual	NONE	LIGHT	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE

CONTAMINATION













There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>25	4	6	6
Potassium	ppm	ASTM D5185m	>20	14	31	27
Fuel		WC Method	>5	<1.0	<1.0	<1.0
Water		WC Method	>0.2	NEG	NEG	NEG
Glycol		WC Method		NEG	NEG	NEG
Soot %	%	*ASTM D7844	>3	0.6	0.6	0.6
Nitration	Abs/cm	*ASTM D7624	>20	9.3	8.4	8.5
Sulfation	Abs/.1mm	*ASTM D7415	>30	19.7	19.4	19.6
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG	NEG

FLUID CONDITION

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m		<1	2	1
Boron	ppm	ASTM D5185m		5	4	10
Barium	ppm	ASTM D5185m		0	0	0
Molybdenum	ppm	ASTM D5185m		57	62	64
Manganese	ppm	ASTM D5185m		0	<1	<1
Magnesium	ppm	ASTM D5185m		860	1005	934
Calcium	ppm	ASTM D5185m		1142	1118	1111
Phosphorus	ppm	ASTM D5185m		1120	1115	1049
Zinc	ppm	ASTM D5185m		1250	1349	1262
Sulfur	ppm	ASTM D5185m		3119	3819	3630
Oxidation	Abs/.1mm	*ASTM D7414	>25	16.7	15.5	15.5
Base Number (BN)	mg KOH/g	ASTM D2896		8.13	30.12	9.94
Visc @ 100°C	cSt	ASTM D445		10.7	11.6	13.4

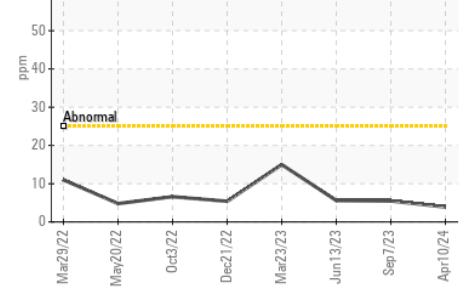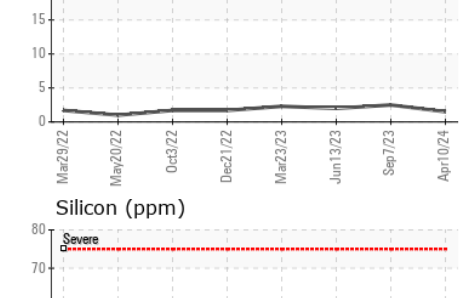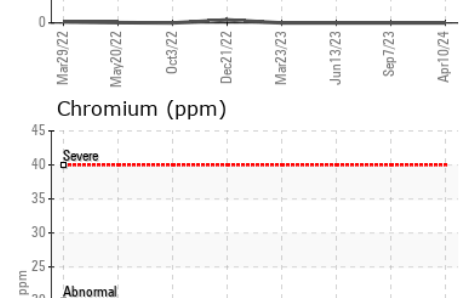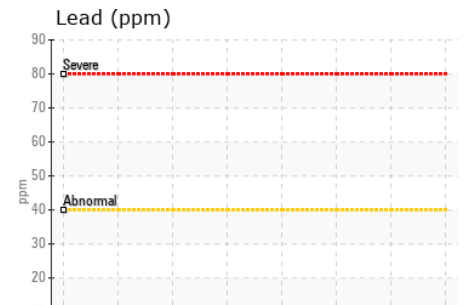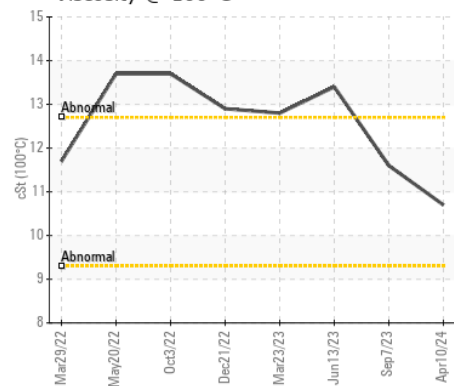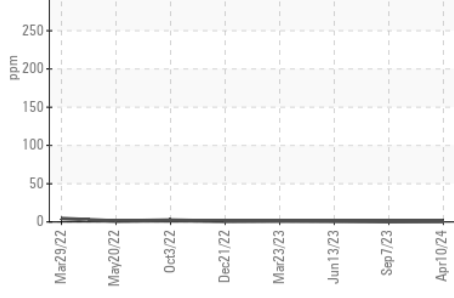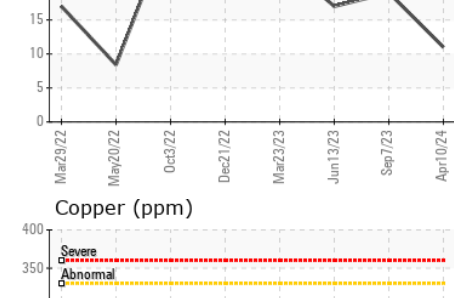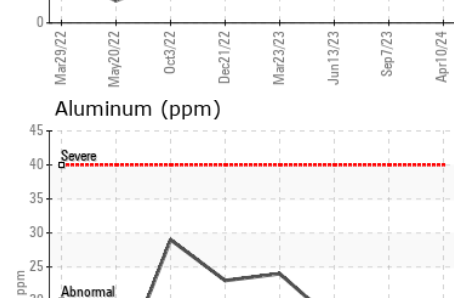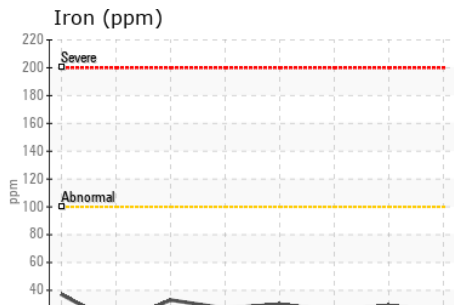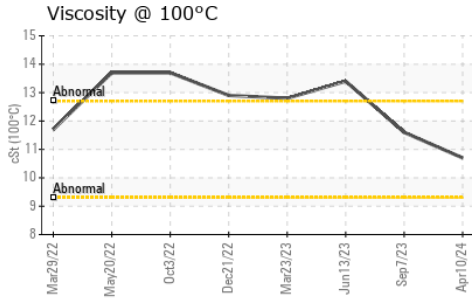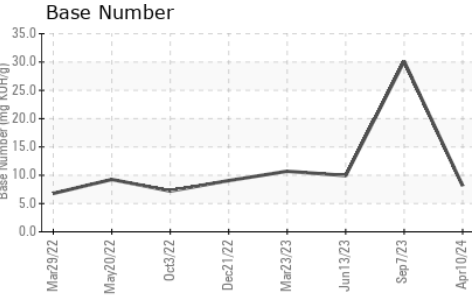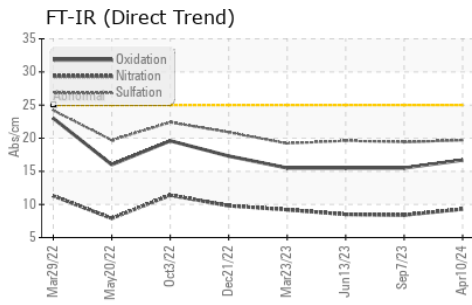

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : LP0001218
Lab Number : 06151300
Unique Number : 10981378
Test Package : MOB 2

Received : 16 Apr 2024
Tested : 18 Apr 2024
Diagnosed : 18 Apr 2024 - Wes Davis

SELECT DEMO
 40 LOWELL RD
 SALEM, NH
 US 03079
 Contact: STAN DOGIL
 SDOGIL@SELECTDEMOSERVICES.COM
 T: (603)401-0147
 F: (603)458-7389

To discuss this sample report, contact Customer Service at 1-800-237-1369.
 * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)