



WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Machine Id  
**PETERBILT T4**  
Component  
**Diesel Engine**  
Fluid  
**10W30 DURON SEMI (--- GAL)**

### RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		<b>LP0001219</b>	LP0001567	LP0001106
Sample Date		Client Info		<b>08 Apr 2024</b>	22 Dec 2023	18 Oct 2023
Machine Age	hrs	Client Info		<b>14831</b>	14116	13540
Oil Age	hrs	Client Info		<b>715</b>	400	400
Filter Age	hrs	Client Info		<b>715</b>	400	400
Oil Changed		Client Info		<b>Changed</b>	Changed	Changed
Filter Changed		Client Info		<b>Changed</b>	Changed	Changed
Sample Status				<b>NORMAL</b>	NORMAL	NORMAL

### WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>100	<b>41</b>	18	16
Chromium	ppm	ASTM D5185m	>20	<b>&lt;1</b>	<1	<1
Nickel	ppm	ASTM D5185m	>4	<b>0</b>	0	<1
Titanium	ppm	ASTM D5185m		<b>0</b>	0	<1
Silver	ppm	ASTM D5185m	>3	<b>0</b>	0	<1
Aluminum	ppm	ASTM D5185m	>20	<b>2</b>	2	1
Lead	ppm	ASTM D5185m	>40	<b>13</b>	3	2
Copper	ppm	ASTM D5185m	>330	<b>2</b>	1	1
Tin	ppm	ASTM D5185m	>15	<b>&lt;1</b>	<1	0
Vanadium	ppm	ASTM D5185m		<b>0</b>	0	0
White Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE

### CONTAMINATION












There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>25	<b>5</b>	5	5
Potassium	ppm	ASTM D5185m	>20	<b>4</b>	2	4
Fuel		WC Method	>5	<b>&lt;1.0</b>	<1.0	<1.0
Water		WC Method	>0.2	<b>NEG</b>	NEG	NEG
Glycol		WC Method		<b>NEG</b>	NEG	NEG
Soot %	%	*ASTM D7844	>3	<b>0.9</b>	0.5	0.4
Nitration	Abs/cm	*ASTM D7624	>20	<b>13.4</b>	10.8	9.8
Sulfation	Abs/.1mm	*ASTM D7415	>30	<b>25.8</b>	21.0	20.2
Silt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Debris	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Appearance	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Odor	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	<b>NEG</b>	NEG	NEG

### FLUID CONDITION

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m		<b>2</b>	2	0
Boron	ppm	ASTM D5185m		<b>6</b>	10	8
Barium	ppm	ASTM D5185m		<b>0</b>	0	4
Molybdenum	ppm	ASTM D5185m		<b>71</b>	63	64
Manganese	ppm	ASTM D5185m		<b>0</b>	<1	0
Magnesium	ppm	ASTM D5185m		<b>1053</b>	987	922
Calcium	ppm	ASTM D5185m		<b>1268</b>	1080	1053
Phosphorus	ppm	ASTM D5185m		<b>1251</b>	1073	1030
Zinc	ppm	ASTM D5185m		<b>1444</b>	1318	1215
Sulfur	ppm	ASTM D5185m		<b>3140</b>	3075	3037
Oxidation	Abs/.1mm	*ASTM D7414	>25	<b>23.1</b>	17.9	16.5
Base Number (BN)	mg KOH/g	ASTM D2896		<b>7.19</b>	8.60	11.50
Visc @ 100°C	cSt	ASTM D445		<b>11.7</b>	11.3	11.3

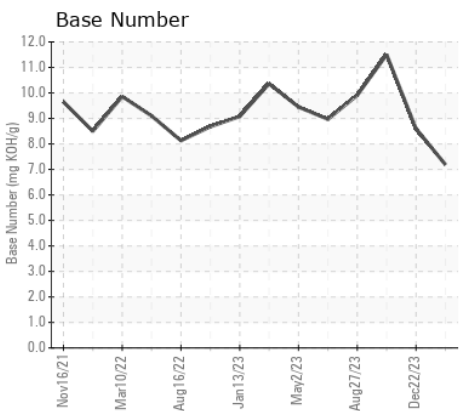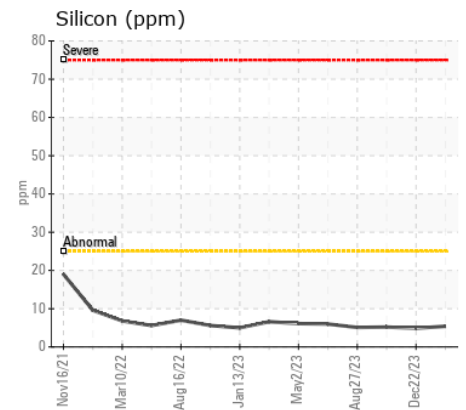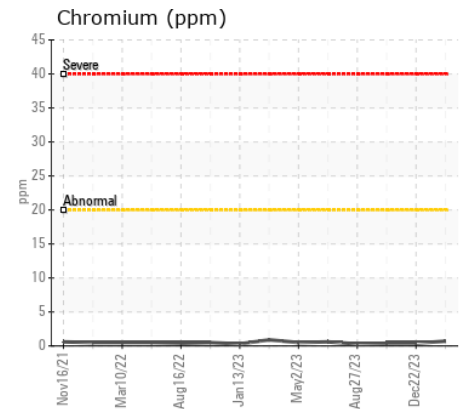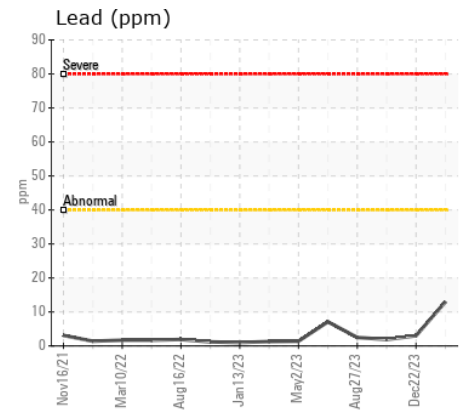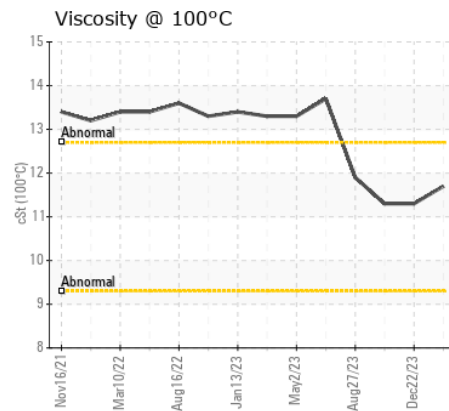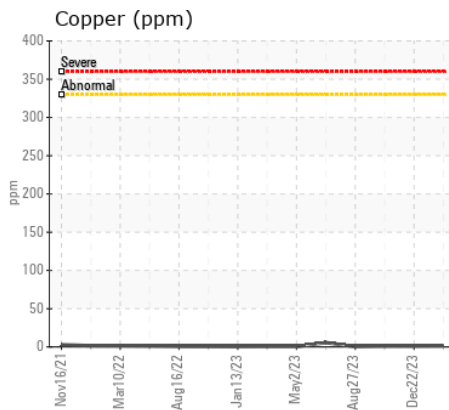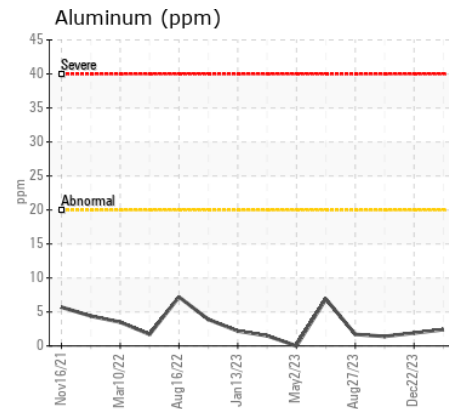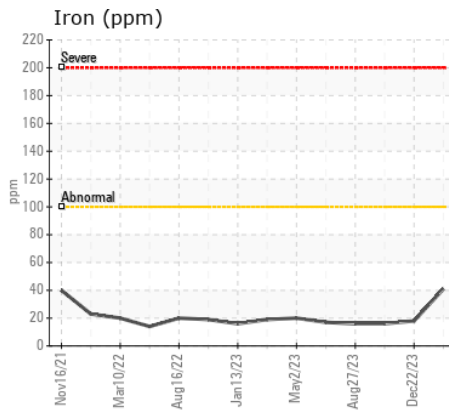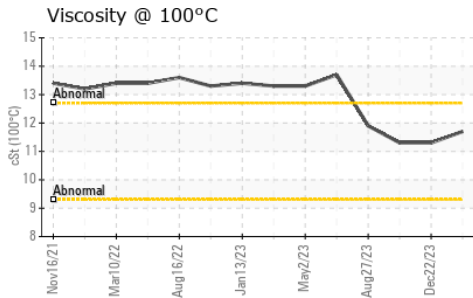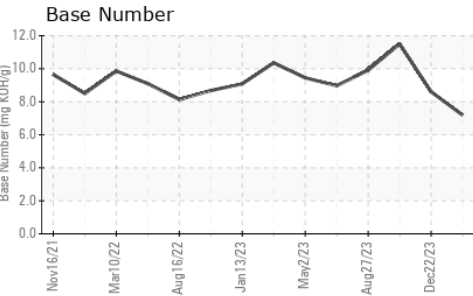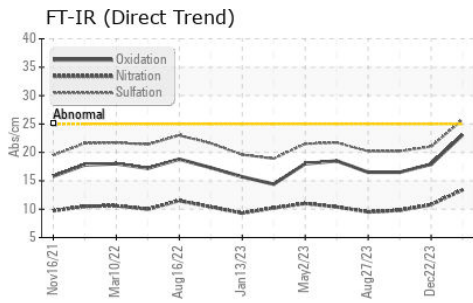

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : LP0001219  
**Lab Number** : 06151301  
**Unique Number** : 10981379  
**Test Package** : MOB 2  
**Received** : 16 Apr 2024  
**Tested** : 18 Apr 2024  
**Diagnosed** : 18 Apr 2024 - Wes Davis

**SELECT DEMO**  
 40 LOWELL RD  
 SALEM, NH  
 US 03079  
 Contact: STAN DOGIL  
 SDOGIL@SELECTDEMOSERVICES.COM  
 T: (603)401-0147  
 F: (603)458-7389

To discuss this sample report, contact Customer Service at 1-800-237-1369.  
 \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.  
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)