



WEAR	<b>NORMAL</b>
CONTAMINATION	<b>NORMAL</b>
FLUID CONDITION	<b>NORMAL</b>

Area

**[05W46013]**

Machine Id

**JOHN DEERE 350P 1FF350PAJPF000731**

Component

**Swing Drive**

Fluid

**JOHN DEERE GL-5 80W90 (13 QTS)**

### RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		<b>JR0211203</b>	JR0192018	---
Sample Date		Client Info		<b>15 Apr 2024</b>	03 Nov 2023	---
Machine Age	hrs	Client Info		<b>961</b>	491	---
Oil Age	hrs	Client Info		<b>961</b>	491	---
Filter Age	hrs	Client Info		<b>0</b>	0	---
Oil Changed		Client Info		<b>Changed</b>	Not Changd	---
Filter Changed		Client Info		<b>N/A</b>	N/A	---
Sample Status				<b>NORMAL</b>	NORMAL	---

### WEAR

All component wear rates are normal.

PQ	UOM	Method	Limit/Abn	Current	History1	History2
PQ		ASTM D8184		<b>59</b>	45	---
Iron	ppm	ASTM D5185m	>151	<b>122</b>	85	---
Chromium	ppm	ASTM D5185m	>11	<b>2</b>	1	---
Nickel	ppm	ASTM D5185m	>10	<b>0</b>	0	---
Titanium	ppm	ASTM D5185m		<b>0</b>	0	---
Silver	ppm	ASTM D5185m		<b>0</b>	0	---
Aluminum	ppm	ASTM D5185m	>21	<b>2</b>	0	---
Lead	ppm	ASTM D5185m	>51	<b>0</b>	0	---
Copper	ppm	ASTM D5185m	>51	<b>&lt;1</b>	0	---
Tin	ppm	ASTM D5185m	>10	<b>0</b>	0	---
Vanadium	ppm	ASTM D5185m		<b>0</b>	0	---
White Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	---
Yellow Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	---

### CONTAMINATION







There is no indication of any contamination in the oil.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Silicon	ppm	ASTM D5185m	>31	<b>25</b>	13	---
Potassium	ppm	ASTM D5185m	>20	<b>4</b>	1	---
Water		WC Method	>0.1	<b>NEG</b>	NEG	---
Silt	scalar	*Visual	NONE	<b>NONE</b>	NONE	---
Debris	scalar	*Visual	NONE	<b>NONE</b>	NONE	---
Sand/Dirt	scalar	*Visual	NONE	<b>NONE</b>	NONE	---
Appearance	scalar	*Visual	NORML	<b>NORML</b>	NORML	---
Odor	scalar	*Visual	NORML	<b>NORML</b>	NORML	---
Emulsified Water	scalar	*Visual	>0.1	<b>NEG</b>	NEG	---

### FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sodium	ppm	ASTM D5185m	>51	<b>&lt;1</b>	2	---
Boron	ppm	ASTM D5185m		<b>67</b>	67	---
Barium	ppm	ASTM D5185m		<b>0</b>	<1	---
Molybdenum	ppm	ASTM D5185m		<b>0</b>	0	---
Manganese	ppm	ASTM D5185m		<b>2</b>	2	---
Magnesium	ppm	ASTM D5185m		<b>1</b>	<1	---
Calcium	ppm	ASTM D5185m		<b>12</b>	39	---
Phosphorus	ppm	ASTM D5185m		<b>576</b>	498	---
Zinc	ppm	ASTM D5185m		<b>5</b>	19	---
Sulfur	ppm	ASTM D5185m		<b>17197</b>	14905	---
Visc @ 40°C	cSt	ASTM D445		<b>187</b>	187	---

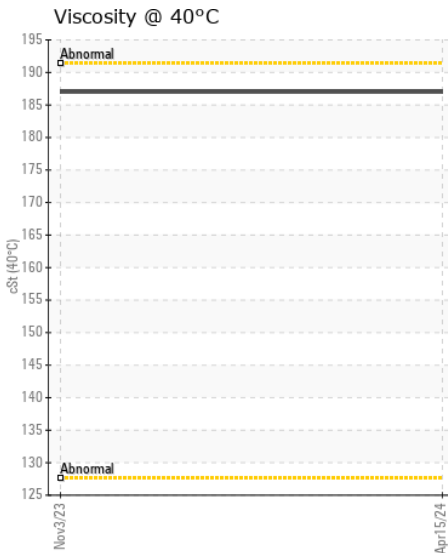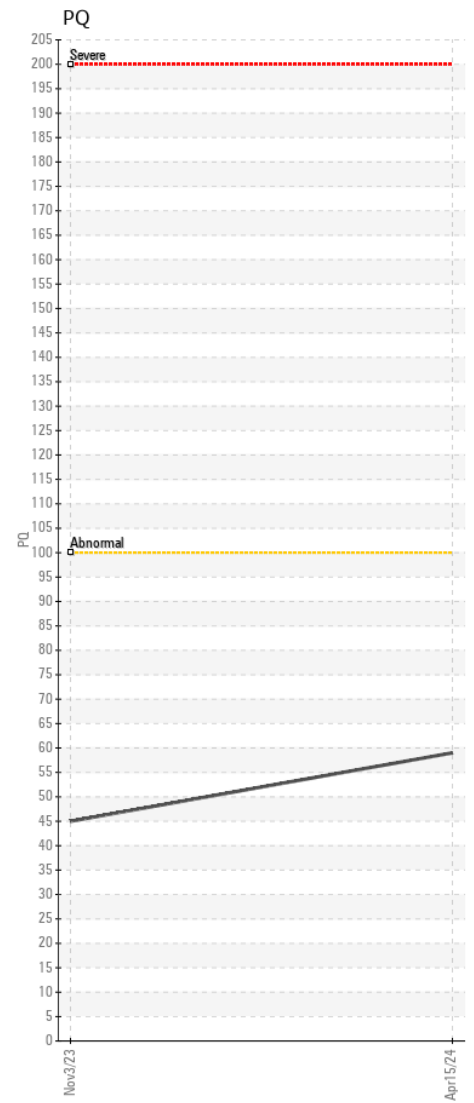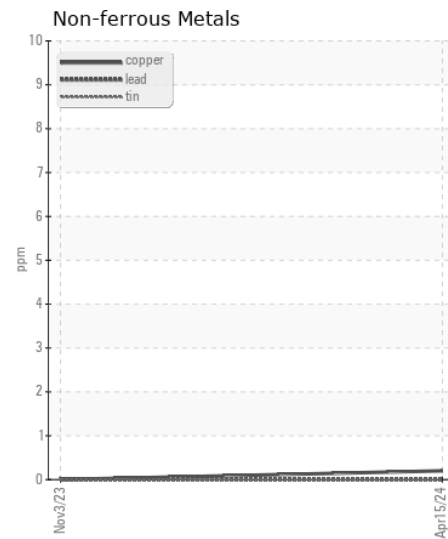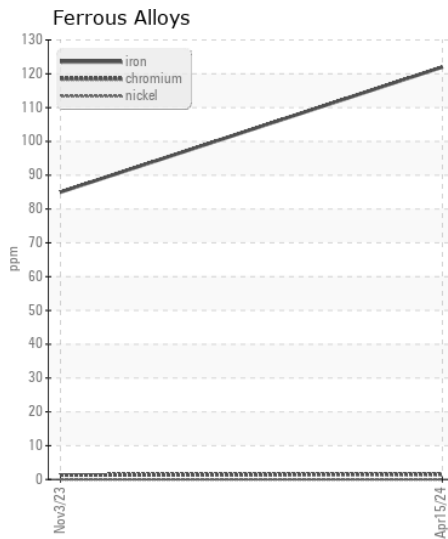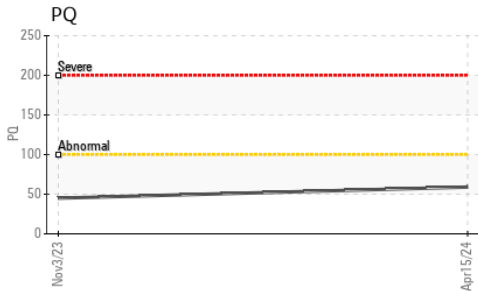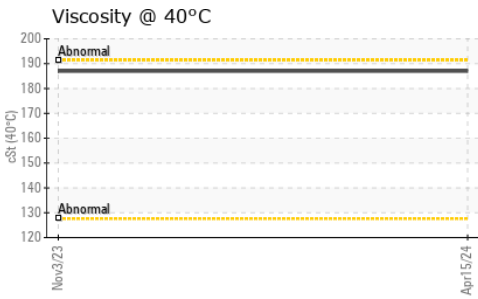

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : JR0211203 **Received** : 16 Apr 2024  
**Lab Number** : 06151323 **Tested** : 18 Apr 2024  
**Unique Number** : 10981401 **Diagnosed** : 19 Apr 2024 - Sean Felton  
**Test Package** : CONST ( Additional Tests: PQ )

**B & S SITE DEVLEOPMENT**  
 7800 PINEY BRANCH LANE  
 BRISTOW, VA  
 US 20136  
 Contact: DANNY HUFF  
 dhuff@bandssite.com  
 T: (540)270-3203  
 F: (703)753-0605

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)