



OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	ABNORMAL
FLUID CONDITION	NORMAL

Area
Store 5 - Cross Lanes [149859]
 Machine Id
JOHN DEERE 35P 1FF035PAAPK000357
 Component
Left Propel Gearbox
 Fluid
JOHN DEERE HY-GARD HYD/TRANS (20 Oz)

RECOMMENDATION

We advise that you check for the source of water entry. The oil change at the time of sampling has been noted. Resample at the next service interval to monitor.

WEAR

All component wear rates are normal.

CONTAMINATION

There is a moderate concentration of water present in the oil.

FLUID CONDITION








The condition of the oil is acceptable for the time in service.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		LEC0046576	---	---
Sample Date		Client Info		12 Apr 2024	---	---
Machine Age	hrs	Client Info		555	---	---
Oil Age	hrs	Client Info		555	---	---
Filter Age	hrs	Client Info		0	---	---
Oil Changed		Client Info		Changed	---	---
Filter Changed		Client Info		Not Changd	---	---
Sample Status				ABNORMAL	---	---

PQ		ASTM D8184		95	---	---
Iron	ppm	ASTM D5185m	>1250	92	---	---
Chromium	ppm	ASTM D5185m	>10	1	---	---
Nickel	ppm	ASTM D5185m	>10	0	---	---
Titanium	ppm	ASTM D5185m		1	---	---
Silver	ppm	ASTM D5185m		0	---	---
Aluminum	ppm	ASTM D5185m		3	---	---
Lead	ppm	ASTM D5185m		0	---	---
Copper	ppm	ASTM D5185m		3	---	---
Tin	ppm	ASTM D5185m		0	---	---
Vanadium	ppm	ASTM D5185m		0	---	---
White Metal	scalar	*Visual	NONE	NONE	---	---
Yellow Metal	scalar	*Visual	NONE	NONE	---	---

Silicon	ppm	ASTM D5185m		10	---	---
Potassium	ppm	ASTM D5185m	>20	4	---	---
Water	%	ASTM D6304	>0.2	▲ 0.354	---	---
ppm Water	ppm	ASTM D6304	>2000	▲ 3540	---	---
Silt	scalar	*Visual	NONE	NONE	---	---
Debris	scalar	*Visual	NONE	NONE	---	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---	---
Appearance	scalar	*Visual	NORML	NORML	---	---
Odor	scalar	*Visual	NORML	NORML	---	---
Emulsified Water	scalar	*Visual	>0.2	▲ 0.2%	---	---

Sodium	ppm	ASTM D5185m		2	---	---
Boron	ppm	ASTM D5185m	6	20	---	---
Barium	ppm	ASTM D5185m	0	5	---	---
Molybdenum	ppm	ASTM D5185m	0	20	---	---
Manganese	ppm	ASTM D5185m		2	---	---
Magnesium	ppm	ASTM D5185m	145	23	---	---
Calcium	ppm	ASTM D5185m	3570	4158	---	---
Phosphorus	ppm	ASTM D5185m	1290	687	---	---
Zinc	ppm	ASTM D5185m	1640	776	---	---
Sulfur	ppm	ASTM D5185m		2682	---	---
Visc @ 40°C	cSt	ASTM D445	57.0	90.6	---	---

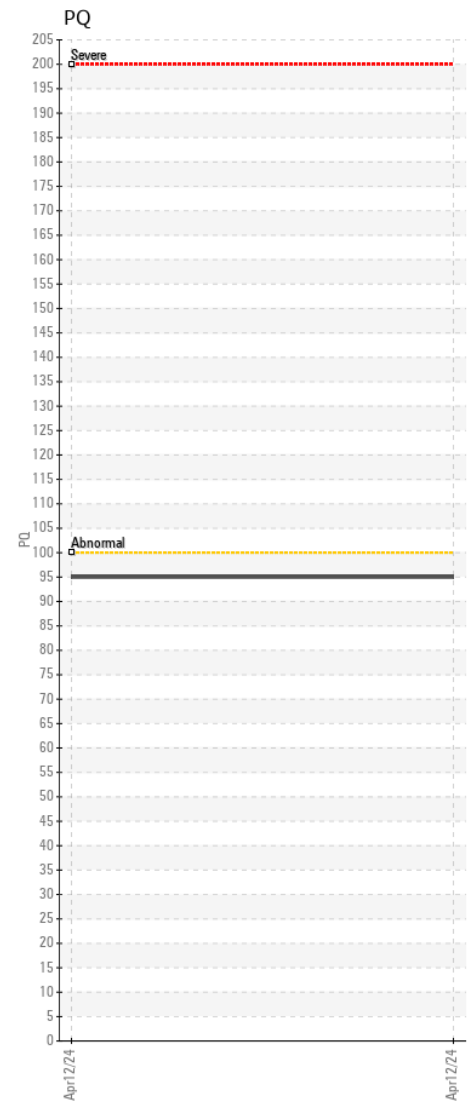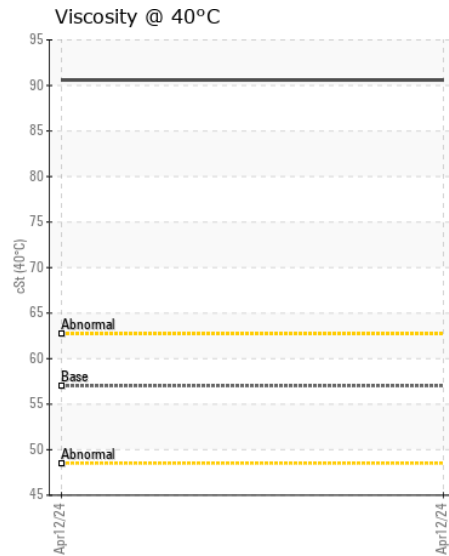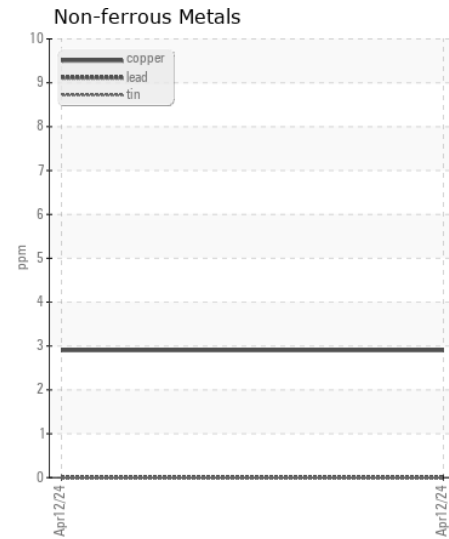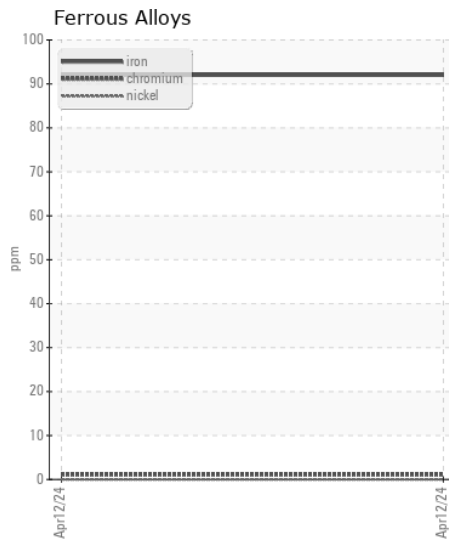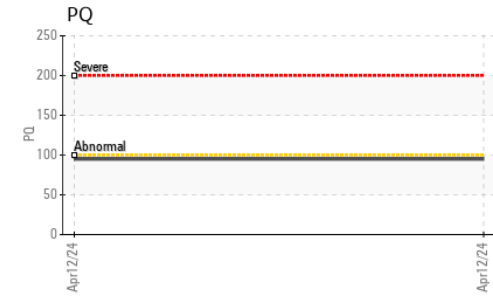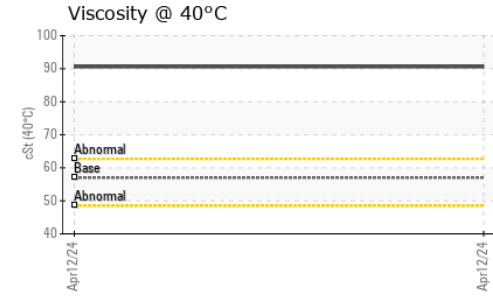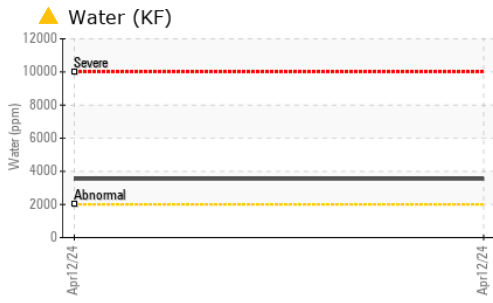

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : LEC0046576 **Received** : 16 Apr 2024
Lab Number : 06151337 **Tested** : 19 Apr 2024
Unique Number : 10981415 **Diagnosed** : 19 Apr 2024 - Sean Felton
Test Package : CONST (Additional Tests: KF, PQ)

LESLIE EQUIPMENT COMPANY
 105 TENNIS CENTER DR.
 MARIETTA, OH
 US 45750-9765
 Contact: LEANNE KENDALL
 KendalLeanne@lec1.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T: (740)373-5570