



LIEBHERR

OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL



Machine Id
LIEBHERR LH60M 1217-94975
Component
Splitter Box
Fluid
{not provided} (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		LHMC165907	LHMC119762	---
Sample Date		Client Info		10 Apr 2024	13 Jun 2019	---
Machine Age	hrs	Client Info		8268	5269	---
Oil Age	hrs	Client Info		0	0	---
Filter Age	hrs	Client Info		0	0	---
Oil Changed		Client Info		Changed	N/A	---
Filter Changed		Client Info		N/A	N/A	---
Sample Status				NORMAL	ABNORMAL	---

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>100	41	▲ 568	---
Chromium	ppm	ASTM D5185m	>5	<1	▲ 7	---
Nickel	ppm	ASTM D5185m	>5	0	4	---
Titanium	ppm	ASTM D5185m		0	0	---
Silver	ppm	ASTM D5185m		0	0	---
Aluminum	ppm	ASTM D5185m	>20	1	<1	---
Lead	ppm	ASTM D5185m	>30	0	0	---
Copper	ppm	ASTM D5185m	>20	1	▲ 132	---
Tin	ppm	ASTM D5185m	>10	0	0	---
Vanadium	ppm	ASTM D5185m		0	0	---
White Metal	scalar	*Visual	NONE	NONE	NONE	---
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	---

CONTAMINATION









There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>30	5	4	---
Potassium	ppm	ASTM D5185m	>20	3	0	---
Water		WC Method	>0.1	NEG	NEG	---
Silt	scalar	*Visual	NONE	NONE	LIGHT	---
Debris	scalar	*Visual	NONE	NONE	NONE	---
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	NORML	---
Emulsified Water	scalar	*Visual	>0.1	NEG	NEG	---

FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185m	>25	0	1	---
Boron	ppm	ASTM D5185m		49	4	---
Barium	ppm	ASTM D5185m		0	0	---
Molybdenum	ppm	ASTM D5185m		3	0	---
Manganese	ppm	ASTM D5185m		0	4	---
Magnesium	ppm	ASTM D5185m		25	10	---
Calcium	ppm	ASTM D5185m		163	55	---
Phosphorus	ppm	ASTM D5185m		597	448	---
Zinc	ppm	ASTM D5185m		99	74	---
Sulfur	ppm	ASTM D5185m		15450	9900	---
Visc @ 40°C	cSt	ASTM D445		104	167	---

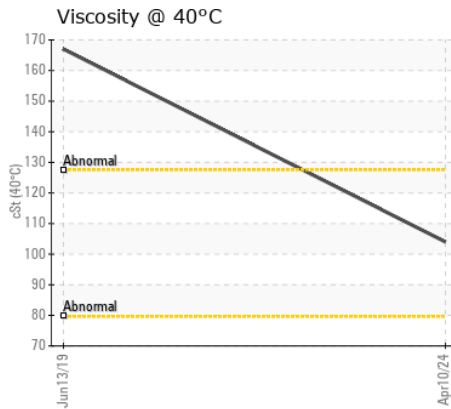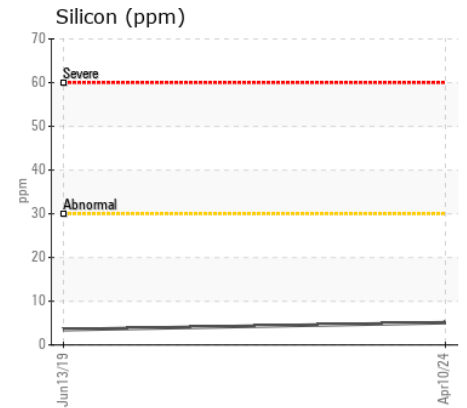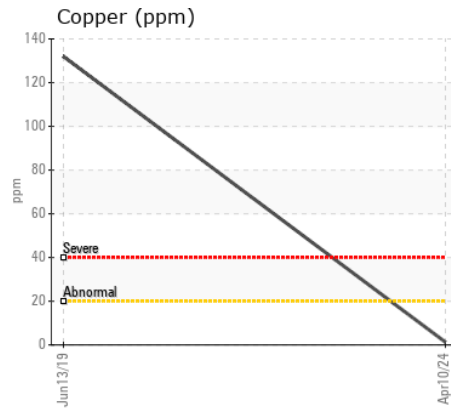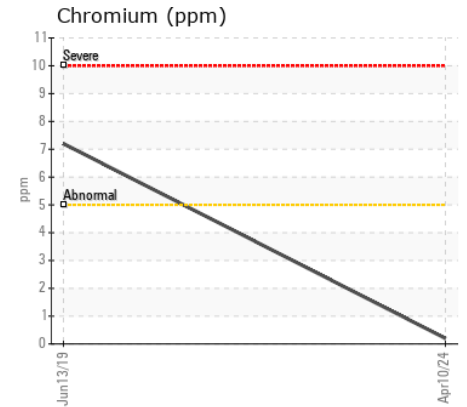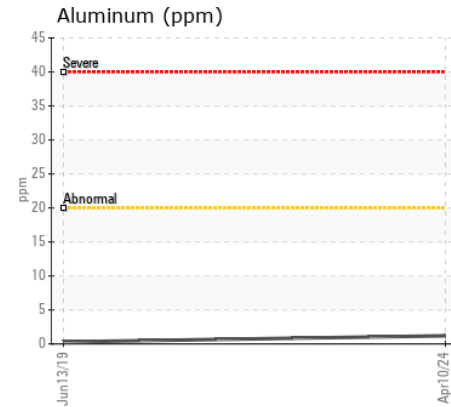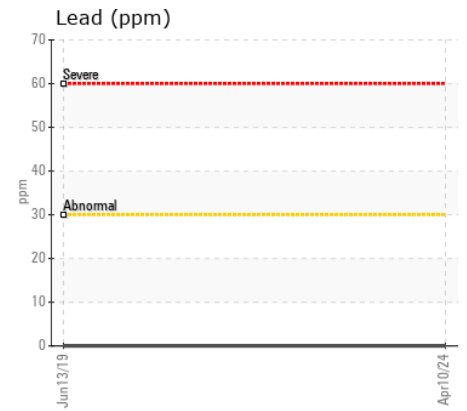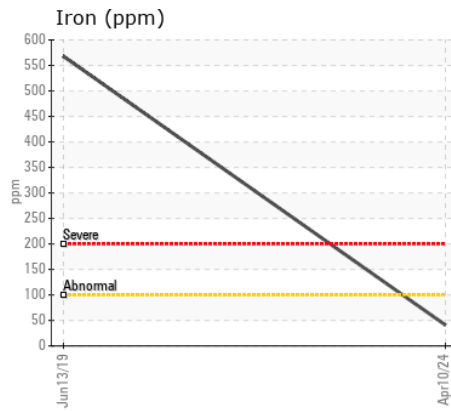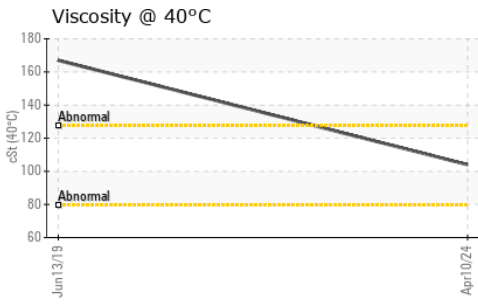

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : LHMC165907 **Received** : 16 Apr 2024
Lab Number : 06151344 **Tested** : 19 Apr 2024
Unique Number : 10981422 **Diagnosed** : 19 Apr 2024 - Sean Felton
Test Package : MOB 1 (Additional Tests: PQ)

AMERICAN STATE EQUIPMENT CO. (RENTAL TO ARCEL MITTAL)
 138 HWY 3217
 LAPLACE, LA
 US 70068
 Contact: SERVICE MANAGER

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T: (414)541-8700

F: