



OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Machine Id
31262
 Component
Right Final Drive
 Fluid
GEAR OIL SAE 80W90 (--- QTS)

RECOMMENDATION

Resample at the next service interval to monitor. Please specify the component make and model with your next sample. Please specify the brand, type, and viscosity of the oil on your next sample.

WEAR

All component wear rates are normal.

CONTAMINATION

There is no indication of any contamination in the oil.

FLUID CONDITION





The condition of the oil is acceptable for the time in service.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		WC0924567	WC0856752	WC0856787
Sample Date		Client Info		13 Apr 2024	11 Oct 2023	11 Oct 2023
Machine Age	hrs	Client Info		827	349	349
Oil Age	hrs	Client Info		250	349	349
Filter Age	hrs	Client Info		250	349	349
Oil Changed		Client Info		Changed	Changed	Changed
Filter Changed		Client Info		Changed	Changed	Changed
Sample Status				NORMAL	NORMAL	NORMAL

Iron	ppm	ASTM D5185m	>500	12	133	140
Chromium	ppm	ASTM D5185m	>10	<1	3	3
Nickel	ppm	ASTM D5185m	>10	0	1	1
Titanium	ppm	ASTM D5185m		0	<1	<1
Silver	ppm	ASTM D5185m		0	0	0
Aluminum	ppm	ASTM D5185m	>25	1	<1	2
Lead	ppm	ASTM D5185m	>25	0	<1	<1
Copper	ppm	ASTM D5185m	>50	<1	<1	<1
Tin	ppm	ASTM D5185m	>10	0	0	0
Vanadium	ppm	ASTM D5185m		0	0	0
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE

Silicon	ppm	ASTM D5185m	>75	5	10	9
Potassium	ppm	ASTM D5185m	>20	2	3	4
Water		WC Method	>0.2	NEG	NEG	NEG
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG	NEG

Sodium	ppm	ASTM D5185m	>170	<1	5	5
Boron	ppm	ASTM D5185m	400	143	4	8
Barium	ppm	ASTM D5185m	200	0	12	28
Molybdenum	ppm	ASTM D5185m	12	13	<1	<1
Manganese	ppm	ASTM D5185m		0	2	2
Magnesium	ppm	ASTM D5185m	12	53	1	1
Calcium	ppm	ASTM D5185m	150	178	12	20
Phosphorus	ppm	ASTM D5185m	1650	2328	1261	1328
Zinc	ppm	ASTM D5185m	125	143	31	30
Sulfur	ppm	ASTM D5185m	22500	18066	27413	28712
Visc @ 40°C	cSt	ASTM D445	143	112	196	196

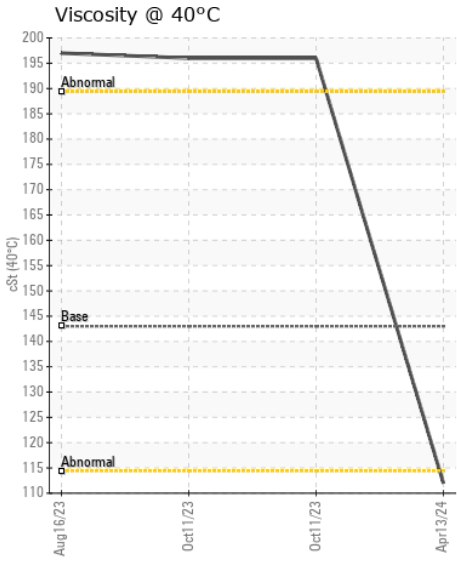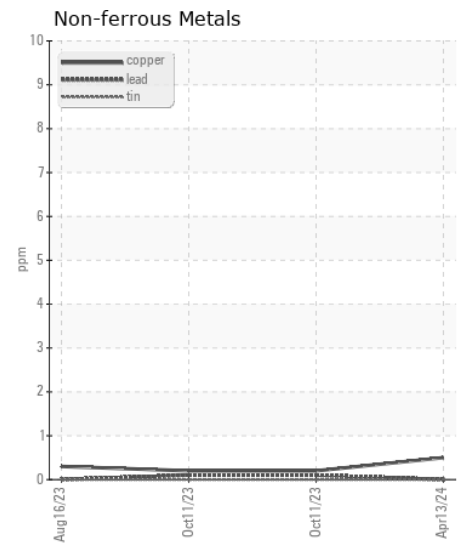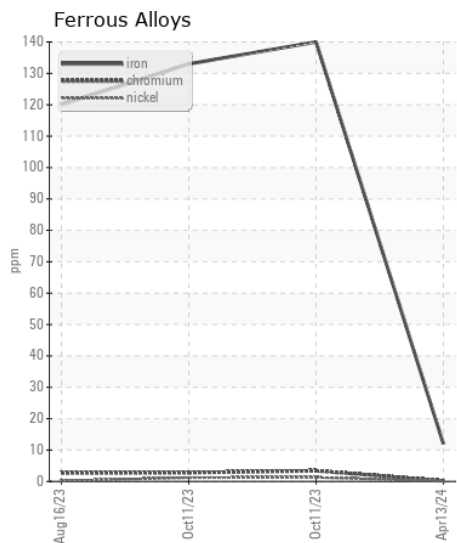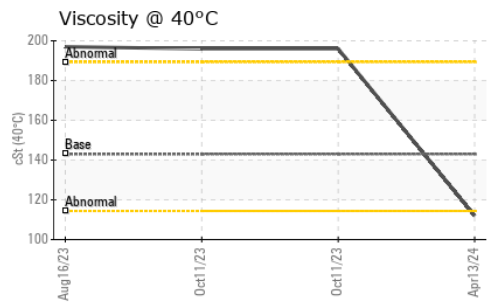

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : WC0924567 **Received** : 16 Apr 2024
Lab Number : 06151377 **Tested** : 18 Apr 2024
Unique Number : 10981455 **Diagnosed** : 18 Apr 2024 - Wes Davis
Test Package : CONST

SULLIVAN EASTERN INC
 2860 C SLATER RD
 MORRISVILLE, NC
 US 27560
 Contact: SCOTT SULLIVAN
 ssullivan@sullivan-eastern.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.
 * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)