



OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Machine Id
31262
 Component
Splitter Box
 Fluid
GEAR OIL SAE 80W90 (--- QTS)

RECOMMENDATION

Resample at the next service interval to monitor. Please specify the component make and model with your next sample. Please specify the brand, type, and viscosity of the oil on your next sample.

WEAR

All component wear rates are normal.





CONTAMINATION

There is no indication of any contamination in the oil.

FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		WC0924568	WC0856744	---
Sample Date		Client Info		13 Apr 2024	11 Oct 2023	---
Machine Age	hrs	Client Info		827	349	---
Oil Age	hrs	Client Info		250	349	---
Filter Age	hrs	Client Info		250	349	---
Oil Changed		Client Info		Changed	N/A	---
Filter Changed		Client Info		Changed	N/A	---
Sample Status				NORMAL	NORMAL	---
Iron	ppm	ASTM D5185m	>325	18	33	---
Chromium	ppm	ASTM D5185m	>5	<1	<1	---
Nickel	ppm	ASTM D5185m	>10	0	<1	---
Titanium	ppm	ASTM D5185m		0	0	---
Silver	ppm	ASTM D5185m		0	0	---
Aluminum	ppm	ASTM D5185m	>5	1	0	---
Lead	ppm	ASTM D5185m		0	<1	---
Copper	ppm	ASTM D5185m	>30	<1	1	---
Tin	ppm	ASTM D5185m		0	<1	---
Vanadium	ppm	ASTM D5185m		0	0	---
White Metal	scalar	*Visual	NONE	NONE	NONE	---
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	---
Silicon	ppm	ASTM D5185m	>20	2	3	---
Potassium	ppm	ASTM D5185m	>20	2	3	---
Water		WC Method	>0.2	NEG	NEG	---
Silt	scalar	*Visual	NONE	NONE	NONE	---
Debris	scalar	*Visual	NONE	NONE	NONE	---
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	NORML	---
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG	---
Sodium	ppm	ASTM D5185m	>170	<1	3	---
Boron	ppm	ASTM D5185m	400	129	1	---
Barium	ppm	ASTM D5185m	200	0	3	---
Molybdenum	ppm	ASTM D5185m	12	10	0	---
Manganese	ppm	ASTM D5185m		0	3	---
Magnesium	ppm	ASTM D5185m	12	43	4	---
Calcium	ppm	ASTM D5185m	150	145	10	---
Phosphorus	ppm	ASTM D5185m	1650	2384	1447	---
Zinc	ppm	ASTM D5185m	125	124	35	---
Sulfur	ppm	ASTM D5185m	22500	19595	31279	---
Visc @ 40°C	cSt	ASTM D445	143	118	189	---

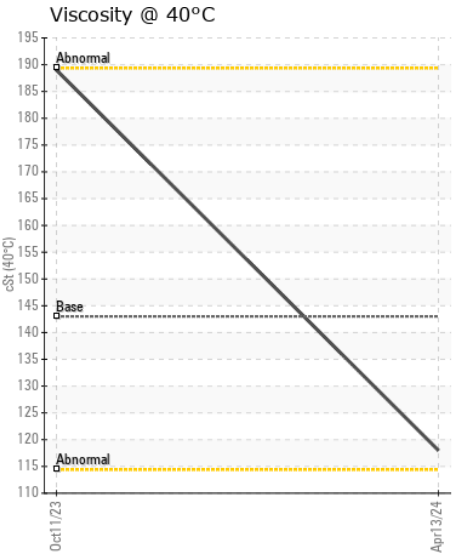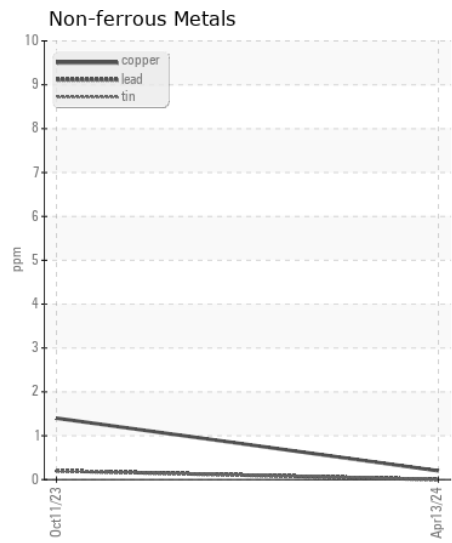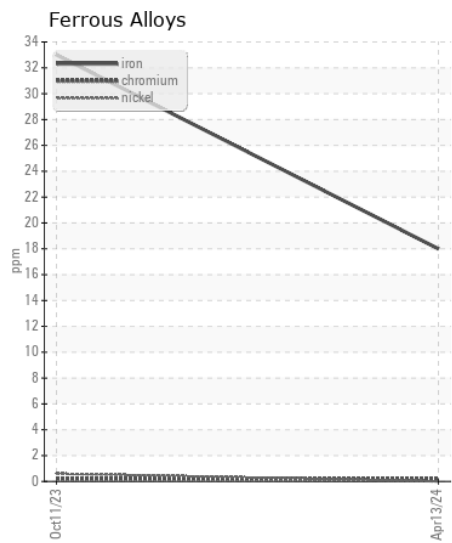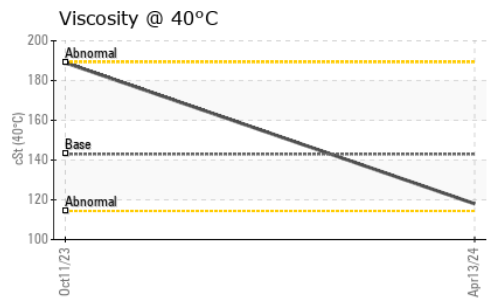

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : WC0924568 **Received** : 16 Apr 2024
Lab Number : 06151380 **Tested** : 18 Apr 2024
Unique Number : 10981458 **Diagnosed** : 18 Apr 2024 - Wes Davis
Test Package : CONST

SULLIVAN EASTERN INC
 2860 C SLATER RD
 MORRISVILLE, NC
 US 27560
 Contact: SCOTT SULLIVAN
 ssullivan@sullivan-eastern.com
 T: (919)484-8993
 F: (919)484-2136

Certificate L2367
 To discuss this sample report, contact Customer Service at 1-800-237-1369.
 * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)