



# WEAR CHECK

## OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL



Area

**2M34**  
Machine Id

**FREIGHTLINER M2 106 MEDIUM DUTY JTK8461**

Component

**Diesel Engine**

Fluid

**DIESEL ENGINE OIL SAE 40 (--- GAL)**

### RECOMMENDATION

Resample at the next service interval to monitor. Please specify the brand, type, and viscosity of the oil on your next sample.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		<b>ARI0007517</b>	ARI0006832	ARI0006821
Sample Date		Client Info		<b>12 Apr 2024</b>	12 Jan 2024	13 Nov 2023
Machine Age	mls	Client Info		<b>34223</b>	31255	29797
Oil Age	mls	Client Info		<b>2968</b>	1458	3220
Filter Age	mls	Client Info		<b>2968</b>	1458	3220
Oil Changed		Client Info		<b>Changed</b>	Changed	Changed
Filter Changed		Client Info		<b>Changed</b>	Changed	Changed
Sample Status				<b>NORMAL</b>	NORMAL	NORMAL

### WEAR

Metal levels are typical for a new component breaking in.

Iron	ppm	ASTM D5185m	>80	<b>4</b>	3	14
Chromium	ppm	ASTM D5185m	>5	<b>&lt;1</b>	<1	<1
Nickel	ppm	ASTM D5185m	>2	<b>0</b>	0	0
Titanium	ppm	ASTM D5185m		<b>0</b>	<1	<1
Silver	ppm	ASTM D5185m	>3	<b>0</b>	0	0
Aluminum	ppm	ASTM D5185m	>30	<b>3</b>	3	3
Lead	ppm	ASTM D5185m	>30	<b>0</b>	0	0
Copper	ppm	ASTM D5185m	>150	<b>0</b>	0	1
Tin	ppm	ASTM D5185m	>5	<b>&lt;1</b>	<1	<1
Vanadium	ppm	ASTM D5185m		<b>0</b>	0	0
White Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE

### CONTAMINATION

There is no indication of any contamination in the oil.


Silicon	ppm	ASTM D5185m	>20	<b>4</b>	5	5
Potassium	ppm	ASTM D5185m	>20	<b>3</b>	0	2
Fuel		WC Method	>5	<b>&lt;1.0</b>	<1.0	<1.0
Water		WC Method	>0.2	<b>NEG</b>	NEG	NEG
Glycol		WC Method		<b>NEG</b>	NEG	NEG
Soot %	%	*ASTM D7844	>3	<b>0.4</b>	0.2	0.5
Nitration	Abs/cm	*ASTM D7624	>20	<b>9.7</b>	8.6	8.5
Sulfation	Abs/.1mm	*ASTM D7415	>30	<b>19.4</b>	18.5	23.7
Silt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Debris	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Appearance	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Odor	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	<b>NEG</b>	NEG	NEG

### FLUID CONDITION


The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m	>216	<b>0</b>	<1	2
Boron	ppm	ASTM D5185m	250	<b>69</b>	97	372
Barium	ppm	ASTM D5185m	10	<b>0</b>	0	0
Molybdenum	ppm	ASTM D5185m	100	<b>84</b>	90	82
Manganese	ppm	ASTM D5185m		<b>0</b>	0	<1
Magnesium	ppm	ASTM D5185m	450	<b>78</b>	74	385
Calcium	ppm	ASTM D5185m	3000	<b>2025</b>	1987	1303
Phosphorus	ppm	ASTM D5185m	1150	<b>951</b>	1002	1018
Zinc	ppm	ASTM D5185m	1350	<b>1103</b>	1179	1227
Sulfur	ppm	ASTM D5185m	4250	<b>3851</b>	3643	3091
Oxidation	Abs/.1mm	*ASTM D7414	>25	<b>15.2</b>	14.1	18.8
Base Number (BN)	mg KOH/g	ASTM D2896	8.5	<b>6.2</b>	6.9	6.8
Visc @ 100°C	cSt	ASTM D445	14.4	<b>13.7</b>	13.7	13.3


**FT-IR (Direct Trend)**

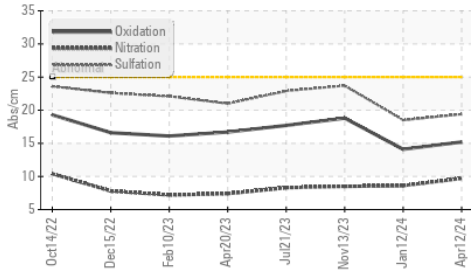


**Ferrous Alloys**

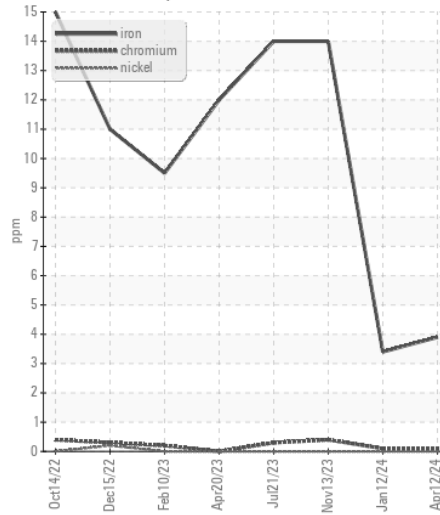


**Base Number**

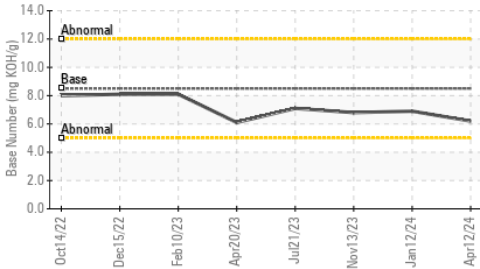


**Non-ferrous Metals**

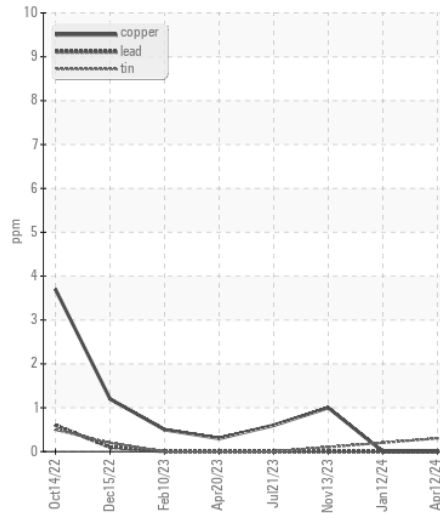


**Viscosity @ 100°C**

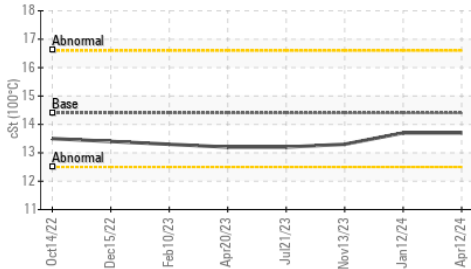

**Viscosity @ 100°C**

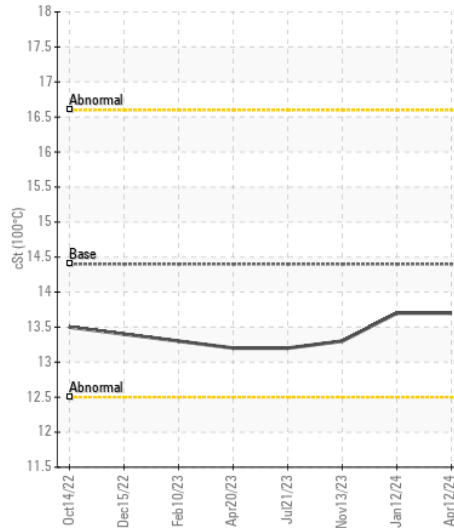

**Base Number**

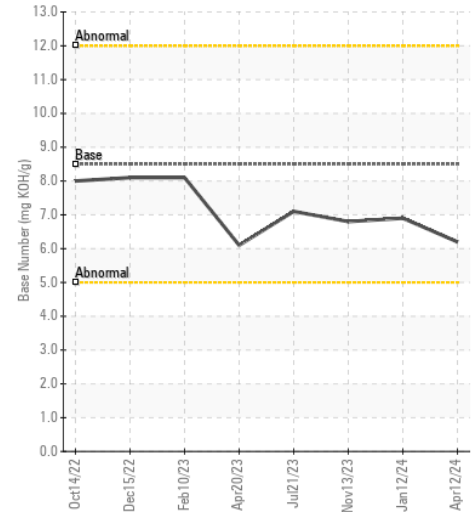

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513

**Sample No.** : ARI0007517

**Lab Number** : 06151486

**Unique Number** : 10981564

**Test Package** : CONST ( Additional Tests: TBN )

**Received** : 17 Apr 2024

**Tested** : 18 Apr 2024

**Diagnosed** : 18 Apr 2024 - Wes Davis

**INSITUFORM TECHNOLOGIES, INC**

709 EAST ORDNANCE ROAD SUITE 501

BALTIMORE, MD

US 21226

Contact: ALBERT FRIEDRICH

AFRIEDRICH@INSITUFORM.COM

T: (240)388-1832

F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)