



WEAR	<b>NORMAL</b>
CONTAMINATION	<b>NORMAL</b>
FLUID CONDITION	<b>NORMAL</b>

Area

**(EMN615)**

Machine Id

**10621C**

Component

**Natural Gas Engine**

Fluid

**CHEVRON DELO 400 NG (8 GAL)**

**RECOMMENDATION**

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		<b>GFL0111510</b>	GFL0111548	GFL0111544
Sample Date		Client Info		<b>12 Apr 2024</b>	25 Mar 2024	06 Mar 2024
Machine Age	hrs	Client Info		<b>0</b>	0	0
Oil Age	hrs	Client Info		<b>0</b>	0	0
Filter Age	hrs	Client Info		<b>0</b>	0	0
Oil Changed		Client Info		<b>N/A</b>	Not Changd	Not Changd
Filter Changed		Client Info		<b>N/A</b>	N/A	N/A
Sample Status				<b>NORMAL</b>	NORMAL	NORMAL

**WEAR**

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>50	<b>18</b>	23	23
Chromium	ppm	ASTM D5185m	>4	<b>&lt;1</b>	<1	1
Nickel	ppm	ASTM D5185m	>2	<b>0</b>	1	<1
Titanium	ppm	ASTM D5185m		<b>0</b>	0	0
Silver	ppm	ASTM D5185m	>3	<b>0</b>	0	0
Aluminum	ppm	ASTM D5185m	>9	<b>2</b>	3	4
Lead	ppm	ASTM D5185m	>30	<b>1</b>	2	<1
Copper	ppm	ASTM D5185m	>35	<b>0</b>	1	1
Tin	ppm	ASTM D5185m	>4	<b>&lt;1</b>	<1	<1
Vanadium	ppm	ASTM D5185m		<b>0</b>	0	0
White Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE

**CONTAMINATION**








There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>+100	<b>4</b>	4	5
Potassium	ppm	ASTM D5185m	>20	<b>0</b>	<1	2
Water		WC Method	>0.1	<b>NEG</b>	NEG	NEG
Soot %	%	*ASTM D7844		<b>0.1</b>	0.1	0
Nitration	Abs/cm	*ASTM D7624	>20	<b>10.9</b>	11.9	10.4
Sulfation	Abs/.1mm	*ASTM D7415	>30	<b>22.8</b>	23.6	22.0
Silt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Debris	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Appearance	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Odor	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Emulsified Water	scalar	*Visual	>0.1	<b>NEG</b>	NEG	NEG

**FLUID CONDITION**

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m		<b>4</b>	5	20
Boron	ppm	ASTM D5185m		<b>21</b>	12	17
Barium	ppm	ASTM D5185m		<b>0</b>	0	0
Molybdenum	ppm	ASTM D5185m		<b>56</b>	57	57
Manganese	ppm	ASTM D5185m		<b>0</b>	<1	0
Magnesium	ppm	ASTM D5185m		<b>598</b>	618	586
Calcium	ppm	ASTM D5185m		<b>1563</b>	1597	1520
Phosphorus	ppm	ASTM D5185m	800	<b>754</b>	732	726
Zinc	ppm	ASTM D5185m	880	<b>951</b>	994	965
Sulfur	ppm	ASTM D5185m		<b>2744</b>	2803	2420
Oxidation	Abs/.1mm	*ASTM D7414	>25	<b>19.1</b>	19.9	18.1
Base Number (BN)	mg KOH/g	ASTM D2896	6.1	<b>5.0</b>	3.8	5.1
Visc @ 100°C	cSt	ASTM D445	15.8	<b>14.5</b>	14.7	14.6

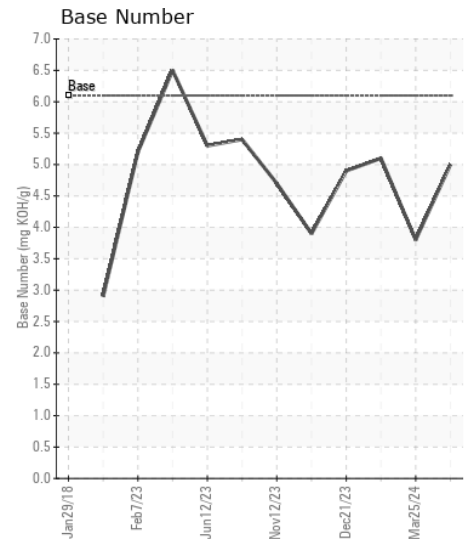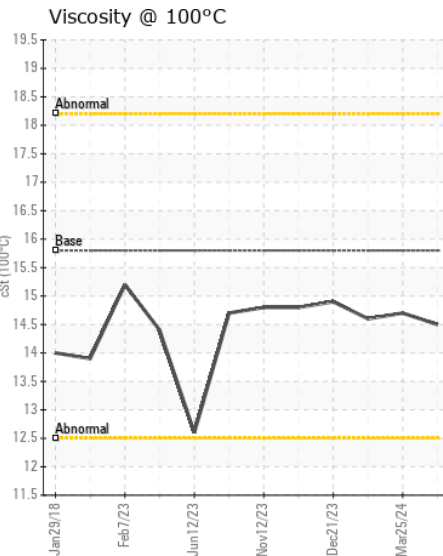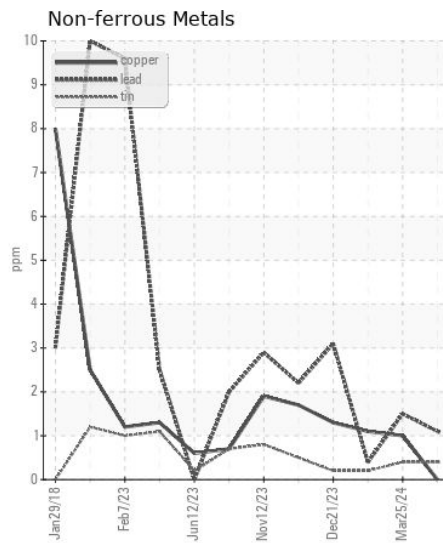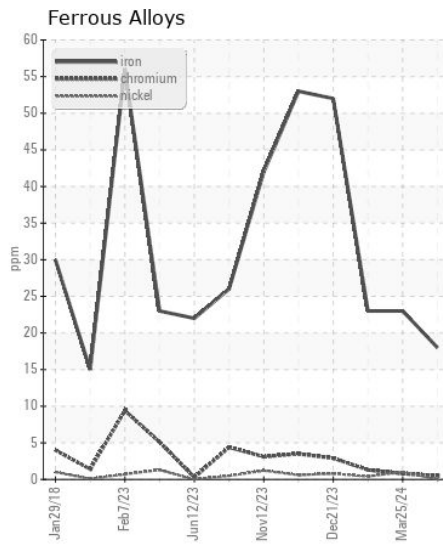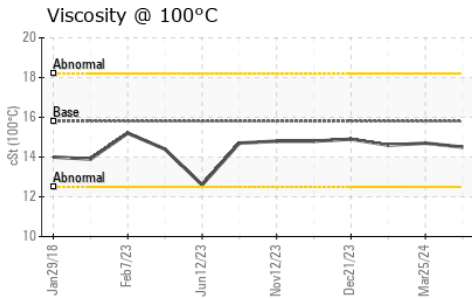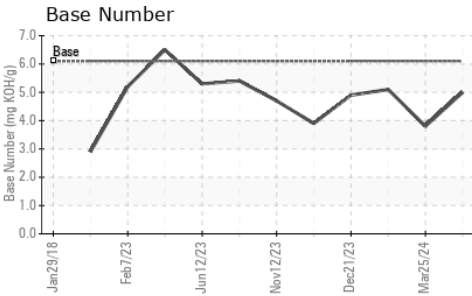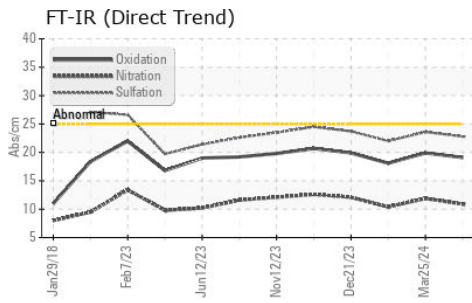

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : GFL0111510  
**Lab Number** : 06151487  
**Unique Number** : 10981565  
**Test Package** : FLEET

**Received** : 17 Apr 2024  
**Tested** : 18 Apr 2024  
**Diagnosed** : 18 Apr 2024 - Wes Davis

**GFL Environmental - 074 - Douglas - Transwaste**  
 1219 Landfill Road  
 Douglas, GA  
 US 31533

Contact: CURTIS JACOBS  
 CURTIS.JACOBS@GFLENV.COM

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T: (912)384-6001  
 F: