



WEAR CHECK

OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Area
2M34
Machine Id
Component
JTK9528
Diesel Engine
Fluid
DIESEL ENGINE OIL SAE 40 (--- QTS)

RECOMMENDATION

Resample at the next service interval to monitor. Please specify the component make and model with your next sample. Please specify the brand, type, and viscosity of the oil on your next sample.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		ARI0007523	ARI0007484	ARI0006846
Sample Date		Client Info		27 Mar 2024	28 Dec 2023	19 Oct 2023
Machine Age	mls	Client Info		18727	16634	13791
Oil Age	mls	Client Info		4936	2843	4815
Filter Age	mls	Client Info		4936	2843	4815
Oil Changed		Client Info		Changed	Changed	Changed
Filter Changed		Client Info		Changed	Changed	Changed
Sample Status				NORMAL	NORMAL	NORMAL

WEAR

Metal levels are typical for a new component breaking in.

Iron	ppm	ASTM D5185m	>100	14	8	19
Chromium	ppm	ASTM D5185m	>20	1	<1	<1
Nickel	ppm	ASTM D5185m	>4	0	0	<1
Titanium	ppm	ASTM D5185m		0	<1	<1
Silver	ppm	ASTM D5185m	>3	0	0	<1
Aluminum	ppm	ASTM D5185m	>20	12	6	4
Lead	ppm	ASTM D5185m	>40	0	<1	<1
Copper	ppm	ASTM D5185m	>330	0	<1	3
Tin	ppm	ASTM D5185m	>15	<1	<1	0
Vanadium	ppm	ASTM D5185m		0	0	0
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE

CONTAMINATION








There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>25	5	5	8
Potassium	ppm	ASTM D5185m	>20	7	8	6
Fuel		WC Method	>5	<1.0	<1.0	<1.0
Water		WC Method	>0.2	NEG	NEG	NEG
Glycol		WC Method		NEG	NEG	NEG
Soot %	%	*ASTM D7844	>3	0.3	0.6	0.4
Nitration	Abs/cm	*ASTM D7624	>20	9.1	9.6	7.6
Sulfation	Abs/.1mm	*ASTM D7415	>30	18.2	21.0	22.4
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	LIGHT	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG	NEG

FLUID CONDITION

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m	>216	0	1	0
Boron	ppm	ASTM D5185m	250	83	100	388
Barium	ppm	ASTM D5185m	10	0	0	4
Molybdenum	ppm	ASTM D5185m	100	88	88	92
Manganese	ppm	ASTM D5185m		0	0	<1
Magnesium	ppm	ASTM D5185m	450	93	120	364
Calcium	ppm	ASTM D5185m	3000	2110	1873	1382
Phosphorus	ppm	ASTM D5185m	1150	979	1043	1105
Zinc	ppm	ASTM D5185m	1350	1125	1153	1216
Sulfur	ppm	ASTM D5185m	4250	3932	3630	3488
Oxidation	Abs/.1mm	*ASTM D7414	>25	13.7	16.7	16.6
Base Number (BN)	mg KOH/g	ASTM D2896	8.5	6.8	7.2	7.8
Visc @ 100°C	cSt	ASTM D445	14.4	13.3	13.0	13.3

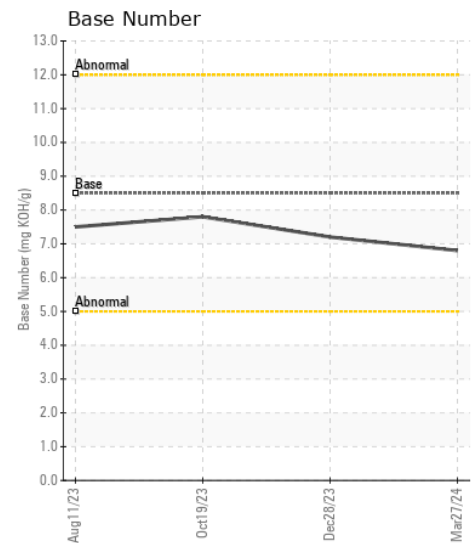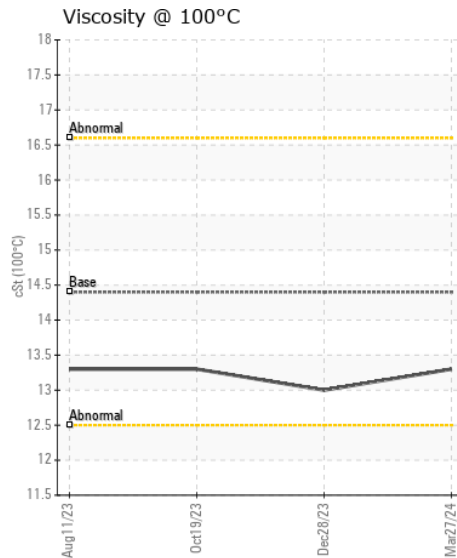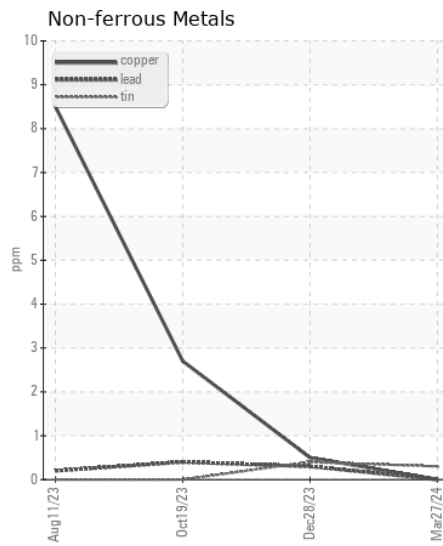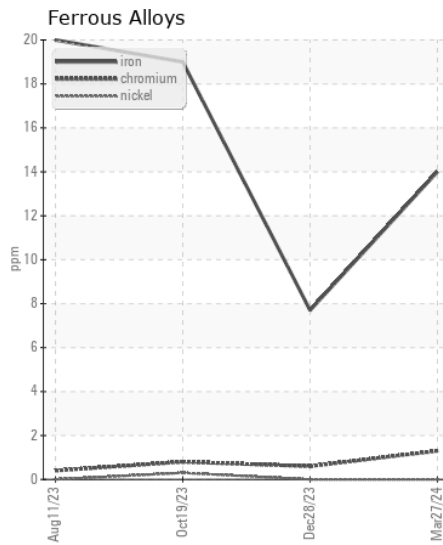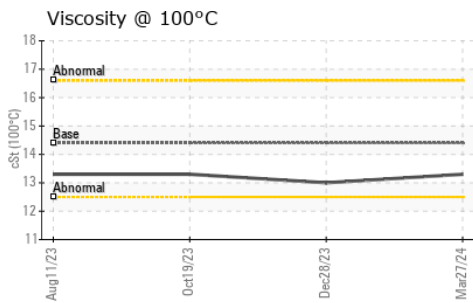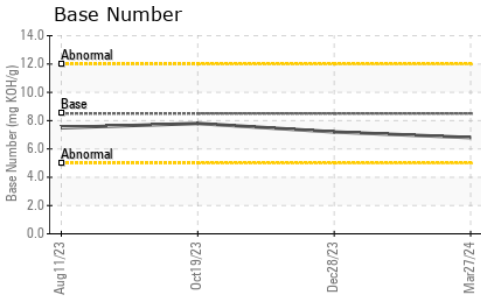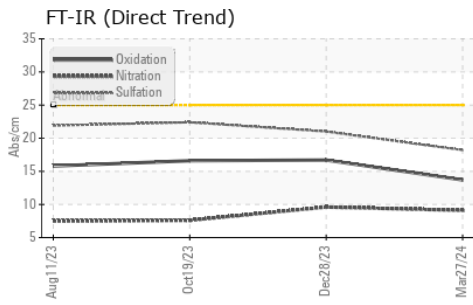

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513

Sample No. : ARI0007523

Lab Number : 06151495

Unique Number : 10981573

Test Package : CONST (Additional Tests: TBN)

Received : 17 Apr 2024

Tested : 18 Apr 2024

Diagnosed : 18 Apr 2024 - Wes Davis

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

INSITUFORM TECHNOLOGIES, INC

709 EAST ORDNANCE ROAD SUITE 501

BALTIMORE, MD

US 21226

Contact: ALBERT FRIEDRICH

AFRIEDRICH@INSITUFORM.COM

T: (240)388-1832

F: