



# OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Machine Id  
**1708**  
 Component  
**Diesel Engine**  
 Fluid  
**DIESEL ENGINE OIL SAE 15W40 (--- GAL)**

## RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		<b>WC0897916</b>	WC0894027	WC0893985
Sample Date		Client Info		<b>10 Apr 2024</b>	13 Mar 2024	17 Jan 2024
Machine Age	mls	Client Info		<b>348276</b>	0	0
Oil Age	mls	Client Info		<b>0</b>	0	0
Filter Age	mls	Client Info		<b>0</b>	0	0
Oil Changed		Client Info		<b>N/A</b>	N/A	N/A
Filter Changed		Client Info		<b>N/A</b>	N/A	N/A
Sample Status				<b>NORMAL</b>	NORMAL	NORMAL

## WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>100	<b>6</b>	10	12
Chromium	ppm	ASTM D5185m	>20	<b>&lt;1</b>	<1	<1
Nickel	ppm	ASTM D5185m	>4	<b>0</b>	0	1
Titanium	ppm	ASTM D5185m		<b>0</b>	<1	0
Silver	ppm	ASTM D5185m	>3	<b>0</b>	<1	<1
Aluminum	ppm	ASTM D5185m	>20	<b>&lt;1</b>	3	2
Lead	ppm	ASTM D5185m	>40	<b>0</b>	0	<1
Copper	ppm	ASTM D5185m	>330	<b>0</b>	4	13
Tin	ppm	ASTM D5185m	>15	<b>&lt;1</b>	<1	<1
Vanadium	ppm	ASTM D5185m		<b>0</b>	<1	<1
White Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE

## CONTAMINATION












There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>25	<b>11</b>	6	6
Potassium	ppm	ASTM D5185m	>20	<b>0</b>	3	3
Fuel		WC Method	>5	<b>&lt;1.0</b>	<1.0	<1.0
Water		WC Method	>0.2	<b>NEG</b>	NEG	NEG
Glycol		WC Method		<b>NEG</b>	NEG	NEG
Soot %	%	*ASTM D7844	>3	<b>0.3</b>	0.2	0.3
Nitration	Abs/cm	*ASTM D7624	>20	<b>8.4</b>	8.2	8.3
Sulfation	Abs/.1mm	*ASTM D7415	>30	<b>22.8</b>	22.9	23.0
Silt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Debris	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Appearance	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Odor	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	<b>NEG</b>	NEG	NEG

## FLUID CONDITION

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m	>158	<b>&lt;1</b>	<1	3
Boron	ppm	ASTM D5185m	250	<b>2</b>	<1	4
Barium	ppm	ASTM D5185m	10	<b>0</b>	2	0
Molybdenum	ppm	ASTM D5185m	100	<b>54</b>	59	56
Manganese	ppm	ASTM D5185m		<b>0</b>	<1	<1
Magnesium	ppm	ASTM D5185m	450	<b>873</b>	888	918
Calcium	ppm	ASTM D5185m	3000	<b>1042</b>	1157	976
Phosphorus	ppm	ASTM D5185m	1150	<b>976</b>	1016	1007
Zinc	ppm	ASTM D5185m	1350	<b>1170</b>	1205	1236
Sulfur	ppm	ASTM D5185m	4250	<b>3229</b>	3223	2835
Oxidation	Abs/.1mm	*ASTM D7414	>25	<b>23.8</b>	24.0	24.0
Base Number (BN)	mg KOH/g	ASTM D2896	8.5	<b>6.5</b>	6.9	7.0
Visc @ 100°C	cSt	ASTM D445	14.4	<b>13.6</b>	13.5	13.4

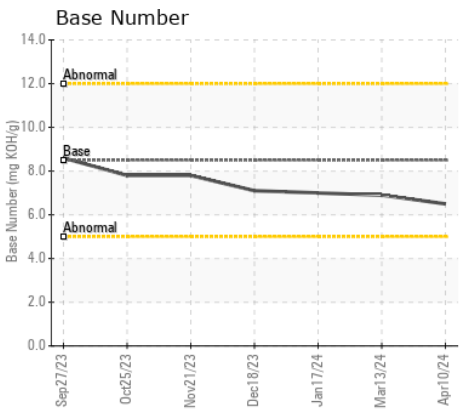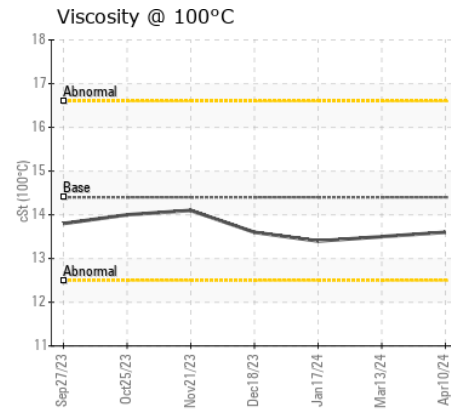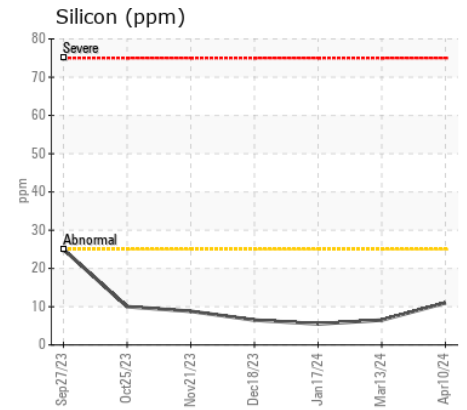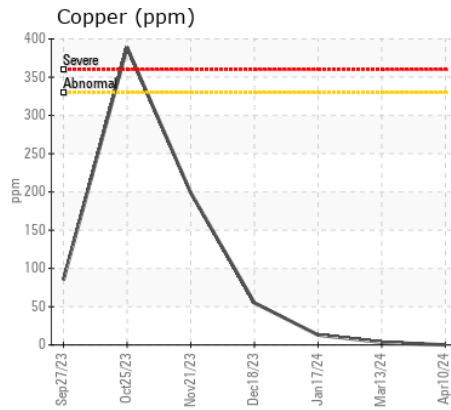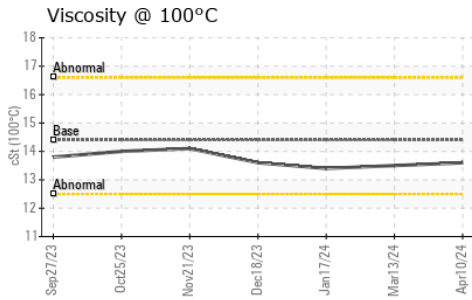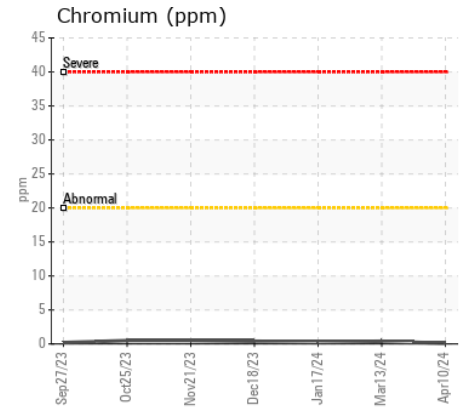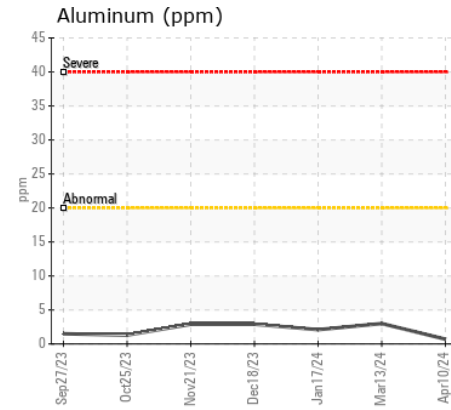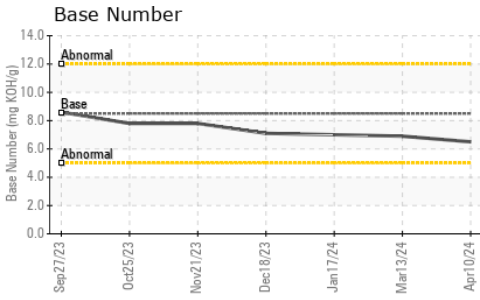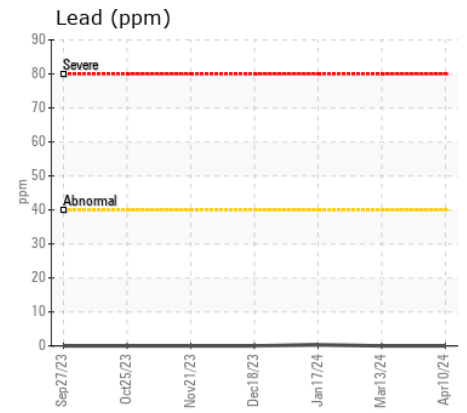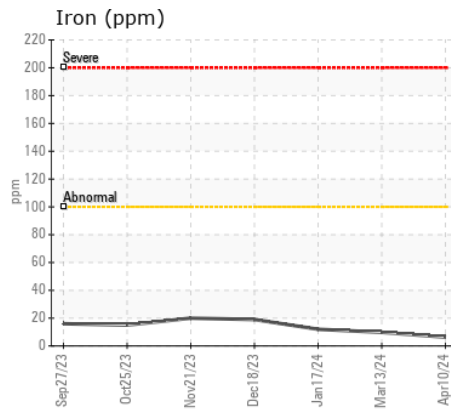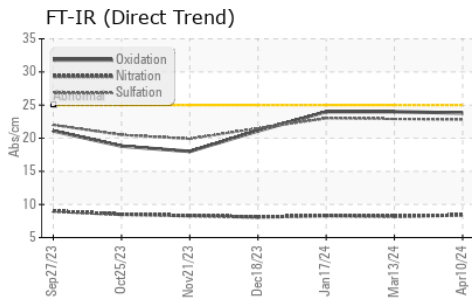

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : WC0897916 **Received** : 17 Apr 2024  
**Lab Number** : 06151528 **Tested** : 18 Apr 2024  
**Unique Number** : 10981606 **Diagnosed** : 18 Apr 2024 - Wes Davis  
**Test Package** : MOB 1 ( Additional Tests: TBN )

**GO DURHAM - RAPT**  
 1903 FAYETTEVILLE ST  
 DURHAM, NC  
 US 27701  
 Contact: Robert Iosiniecki  
 Robert.iosiniecki@ratpdev.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:  
F: