



WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL



Machine Id
922043
Component
Diesel Engine
Fluid
PETRO CANADA DURON SHP 15W40 (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		GFL0116514	GFL0084860	---
Sample Date		Client Info		04 Apr 2024	27 Dec 2023	---
Machine Age	hrs	Client Info		24876	24618	---
Oil Age	hrs	Client Info		24618	0	---
Filter Age	hrs	Client Info		0	0	---
Oil Changed		Client Info		Changed	Changed	---
Filter Changed		Client Info		Changed	Changed	---
Sample Status				NORMAL	NORMAL	---

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>120	54	9	---
Chromium	ppm	ASTM D5185m	>20	1	0	---
Nickel	ppm	ASTM D5185m	>5	5	<1	---
Titanium	ppm	ASTM D5185m	>2	0	0	---
Silver	ppm	ASTM D5185m	>2	0	0	---
Aluminum	ppm	ASTM D5185m	>20	6	2	---
Lead	ppm	ASTM D5185m	>40	<1	<1	---
Copper	ppm	ASTM D5185m	>330	4	<1	---
Tin	ppm	ASTM D5185m	>15	0	<1	---
Vanadium	ppm	ASTM D5185m		<1	0	---
White Metal	scalar	*Visual	NONE	NONE	NONE	---
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	---

CONTAMINATION








There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>25	5	4	---
Potassium	ppm	ASTM D5185m	>20	0	1	---
Fuel		WC Method	>3.0	<1.0	<1.0	---
Water		WC Method	>0.2	NEG	NEG	---
Glycol		WC Method		NEG	NEG	---
Soot %	%	*ASTM D7844	>4	0.3	0.2	---
Nitration	Abs/cm	*ASTM D7624	>20	11.0	6.7	---
Sulfation	Abs/.1mm	*ASTM D7415	>30	19.5	18.0	---
Silt	scalar	*Visual	NONE	NONE	NONE	---
Debris	scalar	*Visual	NONE	NONE	NONE	---
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	NORML	---
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG	---

FLUID CONDITION

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m		6	2	---
Boron	ppm	ASTM D5185m	0	7	7	---
Barium	ppm	ASTM D5185m	0	0	0	---
Molybdenum	ppm	ASTM D5185m	60	54	52	---
Manganese	ppm	ASTM D5185m	0	<1	<1	---
Magnesium	ppm	ASTM D5185m	1010	885	913	---
Calcium	ppm	ASTM D5185m	1070	1030	1008	---
Phosphorus	ppm	ASTM D5185m	1150	939	1056	---
Zinc	ppm	ASTM D5185m	1270	1116	1219	---
Sulfur	ppm	ASTM D5185m	2060	3266	3089	---
Oxidation	Abs/.1mm	*ASTM D7414	>25	17.7	14.7	---
Base Number (BN)	mg KOH/g	ASTM D2896	9.8	7.6	8.6	---
Visc @ 100°C	cSt	ASTM D445	15.4	13.1	13.8	---

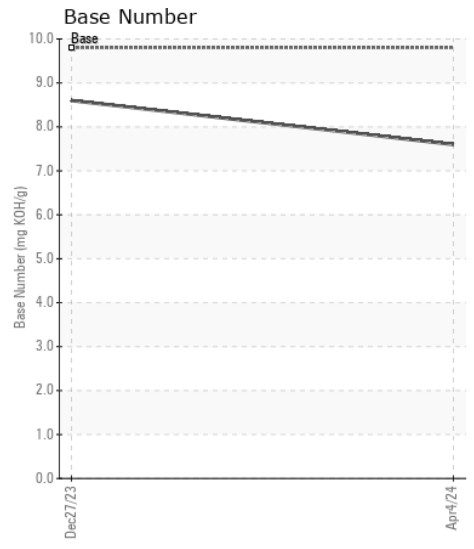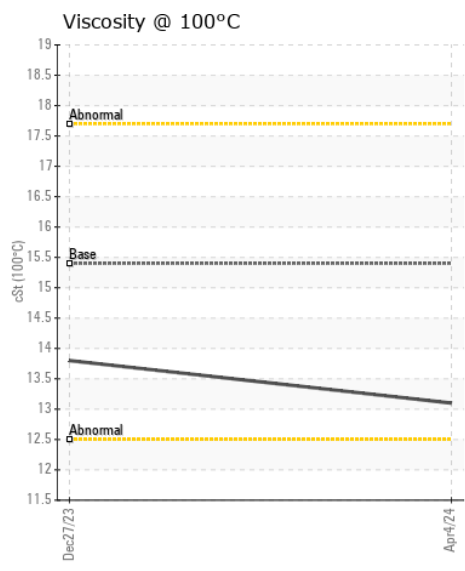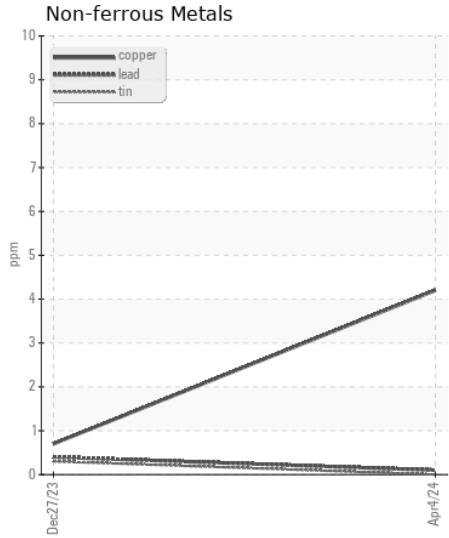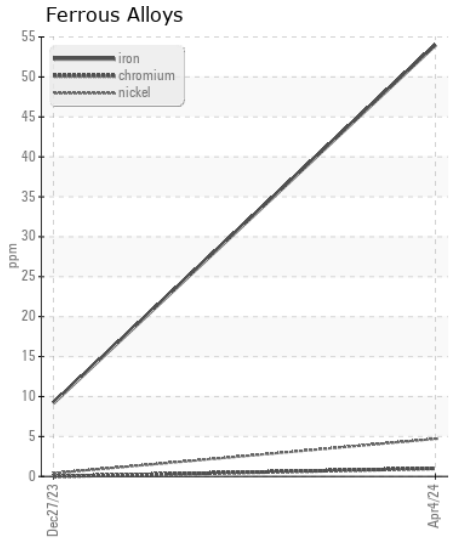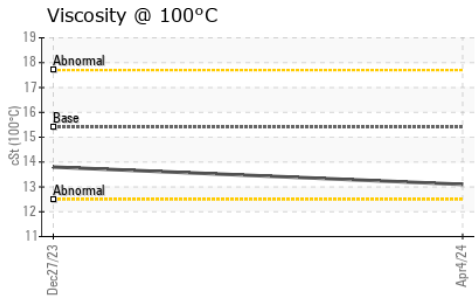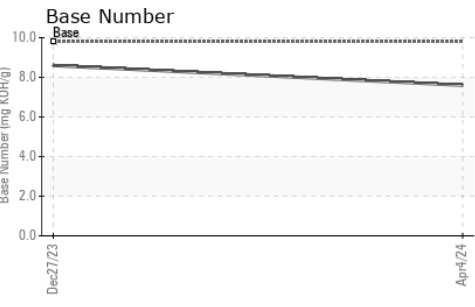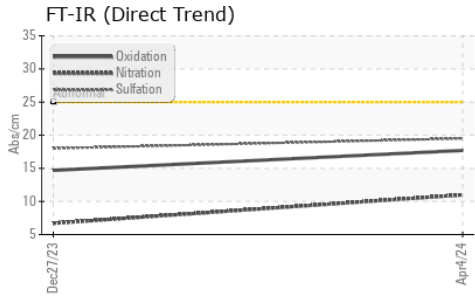

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : GFL0116514 **Received** : 17 Apr 2024
Lab Number : 06151552 **Tested** : 19 Apr 2024
Unique Number : 10981630 **Diagnosed** : 19 Apr 2024 - Wes Davis
Test Package : FLEET

GFL Environmental - 959A - Urbana HC
 4808 cunningham Rd
 Urbana, IL
 US 61802
 Contact: Kristine Tryon
 Ktryon@gflenv.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.
 * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)