



WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Machine Id
8412954
 Component
Diesel Engine
 Fluid
{not provided} (--- QTS)

RECOMMENDATION

Resample at the next service interval to monitor. Please specify the brand, type, and viscosity of the oil on your next sample.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		IL0031060	IL06009316	---
Sample Date		Client Info		01 Apr 2024	25 Oct 2023	---
Machine Age	mls	Client Info		22819	11384	---
Oil Age	mls	Client Info		0	11384	---
Filter Age	mls	Client Info		0	0	---
Oil Changed		Client Info		N/A	N/A	---
Filter Changed		Client Info		N/A	N/A	---
Sample Status				NORMAL	NORMAL	---

WEAR

Metal levels are typical for a new component breaking in.

Iron	ppm	ASTM D5185m	>100	35	21	---
Chromium	ppm	ASTM D5185m	>20	<1	<1	---
Nickel	ppm	ASTM D5185m	>4	<1	<1	---
Titanium	ppm	ASTM D5185m		0	0	---
Silver	ppm	ASTM D5185m	>3	<1	<1	---
Aluminum	ppm	ASTM D5185m	>20	9	8	---
Lead	ppm	ASTM D5185m	>40	3	2	---
Copper	ppm	ASTM D5185m	>330	18	13	---
Tin	ppm	ASTM D5185m	>15	1	2	---
Vanadium	ppm	ASTM D5185m		<1	0	---
White Metal	scalar	*Visual	NONE	NONE	NONE	---
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	---

CONTAMINATION

There is no indication of any contamination in the oil.


Silicon	ppm	ASTM D5185m	>25	32	33	---
Potassium	ppm	ASTM D5185m	>20	34	27	---
Fuel	%	ASTM D3524	>5	<1.0	<1.0	---
Water		WC Method	>0.2	NEG	NEG	---
Glycol		WC Method		NEG	NEG	---
Soot %	%	*ASTM D7844	>3	0.3	0.2	---
Nitration	Abs/cm	*ASTM D7624	>20	9.7	7.0	---
Sulfation	Abs/.1mm	*ASTM D7415	>30	22.2	20.3	---
Silt	scalar	*Visual	NONE	NONE	NONE	---
Debris	scalar	*Visual	NONE	NONE	NONE	---
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	NORML	---
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG	---

FLUID CONDITION


The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m		5	4	---
Boron	ppm	ASTM D5185m		37	80	---
Barium	ppm	ASTM D5185m		3	1	---
Molybdenum	ppm	ASTM D5185m		53	53	---
Manganese	ppm	ASTM D5185m		4	4	---
Magnesium	ppm	ASTM D5185m		416	419	---
Calcium	ppm	ASTM D5185m		1613	1609	---
Phosphorus	ppm	ASTM D5185m		850	945	---
Zinc	ppm	ASTM D5185m		1018	1172	---
Sulfur	ppm	ASTM D5185m		2819	3011	---
Oxidation	Abs/.1mm	*ASTM D7414	>25	20.9	16.4	---
Base Number (BN)	mg KOH/g	ASTM D2896		6.5	8.6	---
Visc @ 100°C	cSt	ASTM D445		11.8	11.6	---


FT-IR (Direct Trend)

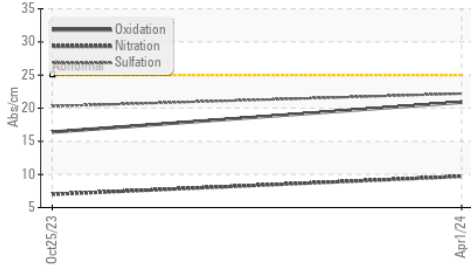


Base Number

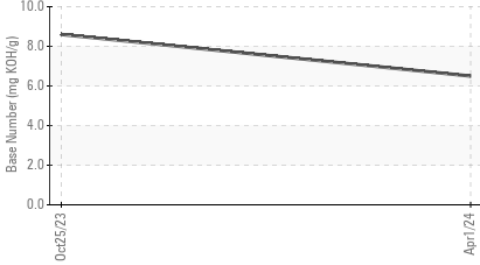


Ferrous Alloys

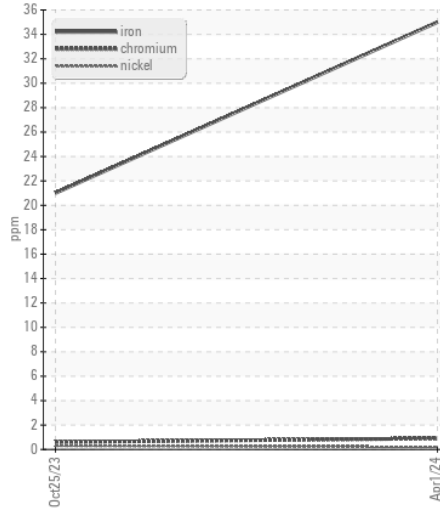


Non-ferrous Metals

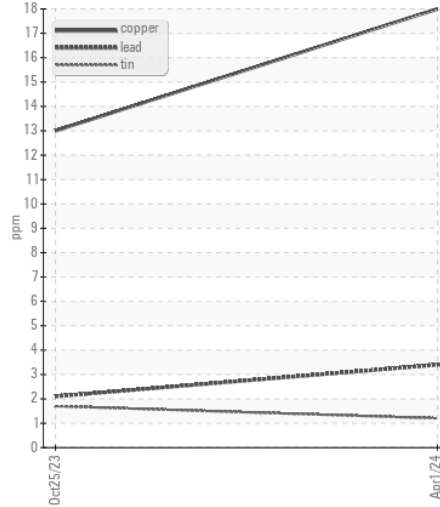


Viscosity @ 100°C

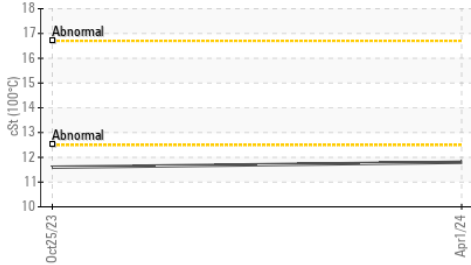

Viscosity @ 100°C

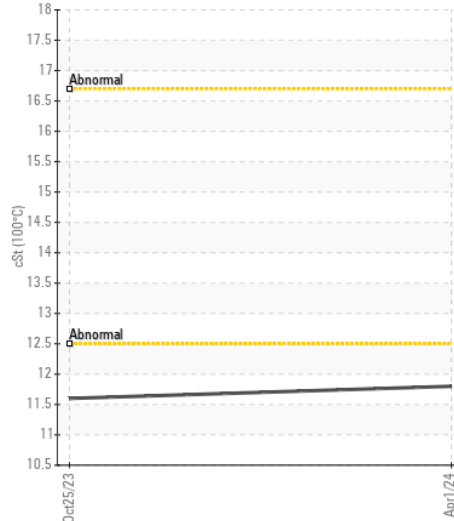

Base Number

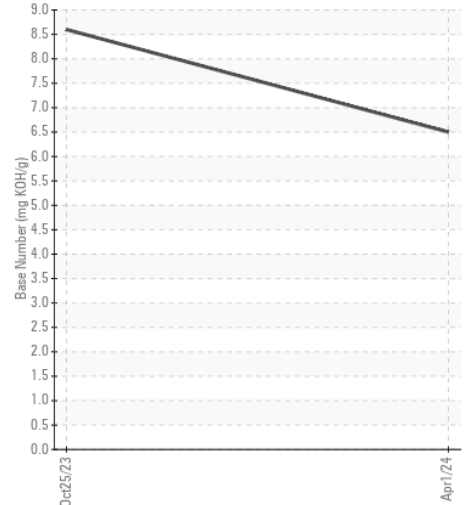

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : IL0031060 **Received** : 17 Apr 2024
Lab Number : 06151593 **Tested** : 18 Apr 2024
Unique Number : 10981671 **Diagnosed** : 19 Apr 2024 - Jonathan Hester
Test Package : FLEET (Additional Tests: FuelDilution)

IDEALRELEASE OF ATLANTA - FULTON
 4675 BAKERS FERRY ROAD
 ATLANTA, GA
 US 30331

Contact: DAVID JOHNS
 davidjohns@idealease.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T: (404)699-5571
 F: (404)699-7420