



WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Machine Id
142458
Component
Diesel Engine
Fluid
{not provided} (--- QTS)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		IL06151611	IL06068903	---
Sample Date		Client Info		05 Apr 2024	19 Dec 2023	---
Machine Age	hrs	Client Info		646	477	---
Oil Age	hrs	Client Info		0	0	---
Filter Age	hrs	Client Info		0	0	---
Oil Changed		Client Info		N/A	N/A	---
Filter Changed		Client Info		N/A	N/A	---
Sample Status				NORMAL	NORMAL	---

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>100	33	67	---
Chromium	ppm	ASTM D5185m	>20	1	2	---
Nickel	ppm	ASTM D5185m	>4	0	<1	---
Titanium	ppm	ASTM D5185m		0	<1	---
Silver	ppm	ASTM D5185m	>3	0	0	---
Aluminum	ppm	ASTM D5185m	>20	5	10	---
Lead	ppm	ASTM D5185m	>40	0	1	---
Copper	ppm	ASTM D5185m	>330	11	64	---
Tin	ppm	ASTM D5185m	>15	0	0	---
Vanadium	ppm	ASTM D5185m		<1	<1	---
White Metal	scalar	*Visual	NONE	NONE	NONE	---
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	---

CONTAMINATION

There is no indication of any contamination in the oil.


Silicon	ppm	ASTM D5185m	>25	7	23	---
Potassium	ppm	ASTM D5185m	>20	8	28	---
Fuel	%	ASTM D3524	>5	<1.0	1.2	---
Water		WC Method	>0.2	NEG	NEG	---
Glycol		WC Method		NEG	NEG	---
Soot %	%	*ASTM D7844	>3	0.2	0.4	---
Nitration	Abs/cm	*ASTM D7624	>20	7.6	12.2	---
Sulfation	Abs/.1mm	*ASTM D7415	>30	19.5	22.9	---
Silt	scalar	*Visual	NONE	NONE	NONE	---
Debris	scalar	*Visual	NONE	NONE	NONE	---
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	NORML	---
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG	---

FLUID CONDITION


The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m		2	7	---
Boron	ppm	ASTM D5185m		7	26	---
Barium	ppm	ASTM D5185m		<1	4	---
Molybdenum	ppm	ASTM D5185m		58	51	---
Manganese	ppm	ASTM D5185m		1	6	---
Magnesium	ppm	ASTM D5185m		886	889	---
Calcium	ppm	ASTM D5185m		1079	1315	---
Phosphorus	ppm	ASTM D5185m		926	744	---
Zinc	ppm	ASTM D5185m		1104	985	---
Sulfur	ppm	ASTM D5185m		3331	2272	---
Oxidation	Abs/.1mm	*ASTM D7414	>25	15.9	23.5	---
Base Number (BN)	mg KOH/g	ASTM D2896		5.03	6.6	---
Visc @ 100°C	cSt	ASTM D445		12.3	11.6	---


FT-IR (Direct Trend)

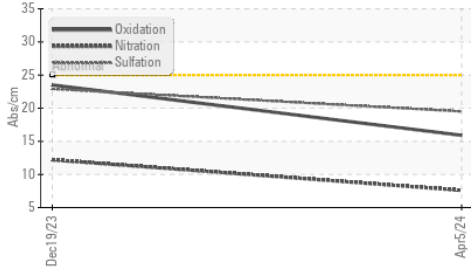


Ferrous Alloys

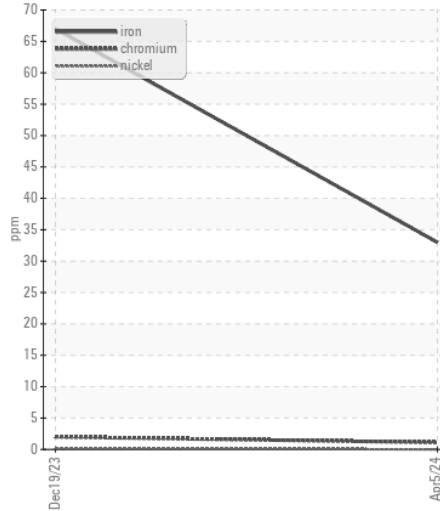


Base Number

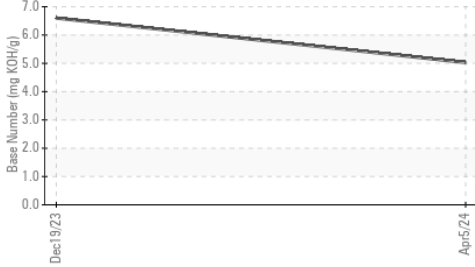


Non-ferrous Metals

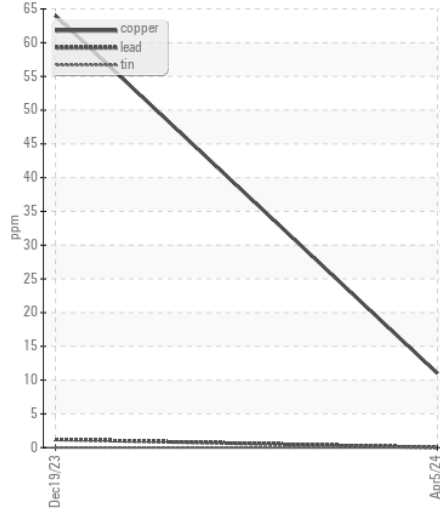


Viscosity @ 100°C

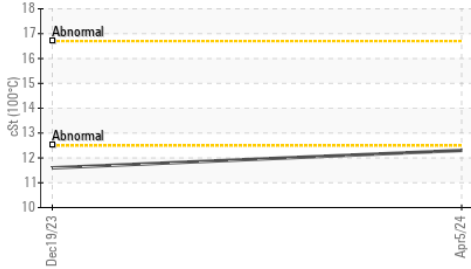


Fuel Dilution

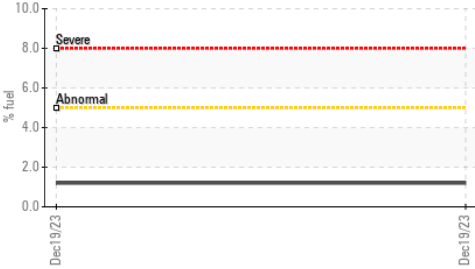

Viscosity @ 100°C

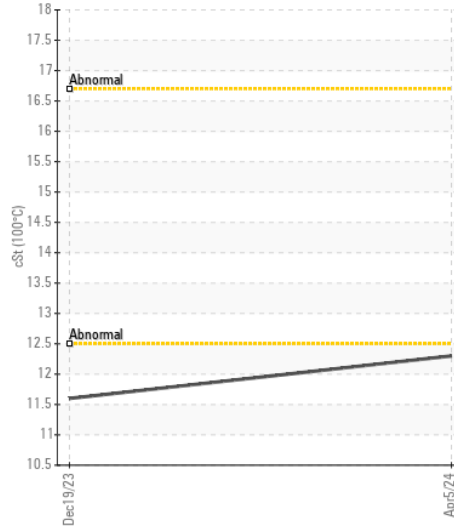

Base Number

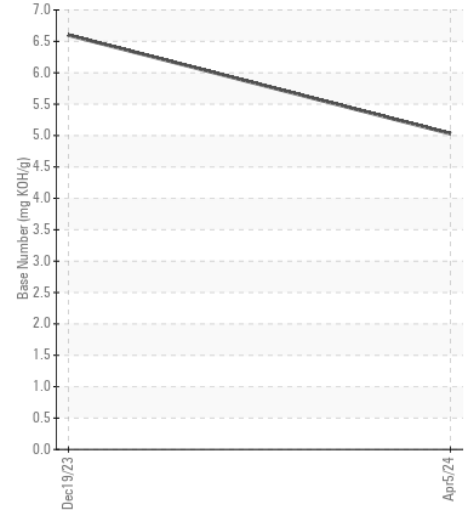

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : IL06151611 **Received** : 17 Apr 2024
Lab Number : 061516111 **Tested** : 23 Apr 2024
Unique Number : 10981689 **Diagnosed** : 23 Apr 2024 - Jonathan Hester
Test Package : FLEET (Additional Tests: FuelDilution)

RUSH TRUCK LEASING - CINCINNATI IDEALEASE
 11777 HIGHWAY DRIVE
 CINCINNATI, OH
 US 45241
 Contact: ROBERT BAIER
 baierr@rushenterprises.com
 T: (513)657-7901
 F: (513)733-0537

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)