



PacLease

OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Machine Id
1XPBD9X1RD659876
 Component
Diesel Engine
 Fluid
{not provided} (--- LTR)

RECOMMENDATION

Resample at the next service interval to monitor. Please specify the brand, type, and viscosity of the oil on your next sample.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		RPL06151646	---	---
Sample Date		Client Info		28 Mar 2024	---	---
Machine Age	mls	Client Info		25813	---	---
Oil Age	mls	Client Info		190	---	---
Filter Age	mls	Client Info		0	---	---
Oil Changed		Client Info		N/A	---	---
Filter Changed		Client Info		N/A	---	---
Sample Status				NORMAL	---	---

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>100	44	---	---
Chromium	ppm	ASTM D5185m	>20	2	---	---
Nickel	ppm	ASTM D5185m	>4	0	---	---
Titanium	ppm	ASTM D5185m		0	---	---
Silver	ppm	ASTM D5185m	>3	<1	---	---
Aluminum	ppm	ASTM D5185m	>20	44	---	---
Lead	ppm	ASTM D5185m	>40	0	---	---
Copper	ppm	ASTM D5185m	>330	13	---	---
Tin	ppm	ASTM D5185m	>15	1	---	---
Vanadium	ppm	ASTM D5185m		0	---	---
White Metal	scalar	*Visual	NONE	NONE	---	---
Yellow Metal	scalar	*Visual	NONE	NONE	---	---

CONTAMINATION








There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>25	16	---	---
Potassium	ppm	ASTM D5185m	>20	128	---	---
Fuel	%	ASTM D3524	>5	<1.0	---	---
Water		WC Method	>0.2	NEG	---	---
Glycol		WC Method		NEG	---	---
Soot %	%	*ASTM D7844	>3	0.2	---	---
Nitration	Abs/cm	*ASTM D7624	>20	10.9	---	---
Sulfation	Abs/.1mm	*ASTM D7415	>30	24.8	---	---
Silt	scalar	*Visual	NONE	NONE	---	---
Debris	scalar	*Visual	NONE	NONE	---	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---	---
Appearance	scalar	*Visual	NORML	NORML	---	---
Odor	scalar	*Visual	NORML	NORML	---	---
Emulsified Water	scalar	*Visual	>0.2	NEG	---	---

FLUID CONDITION

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m		2	---	---
Boron	ppm	ASTM D5185m		26	---	---
Barium	ppm	ASTM D5185m		0	---	---
Molybdenum	ppm	ASTM D5185m		<1	---	---
Manganese	ppm	ASTM D5185m		1	---	---
Magnesium	ppm	ASTM D5185m		731	---	---
Calcium	ppm	ASTM D5185m		1466	---	---
Phosphorus	ppm	ASTM D5185m		774	---	---
Zinc	ppm	ASTM D5185m		873	---	---
Sulfur	ppm	ASTM D5185m		3411	---	---
Oxidation	Abs/.1mm	*ASTM D7414	>25	20.7	---	---
Base Number (BN)	mg KOH/g	ASTM D2896		5.2	---	---
Visc @ 100°C	cSt	ASTM D445		12.0	---	---

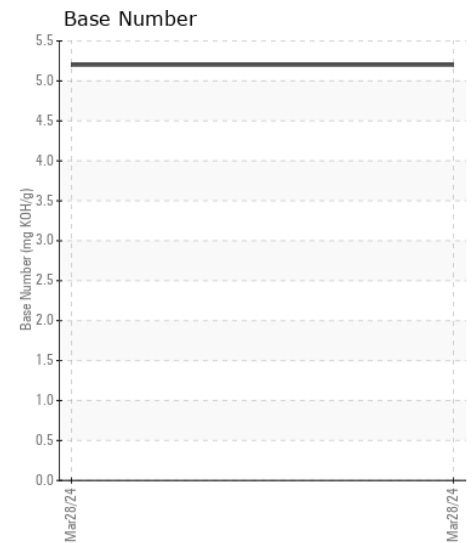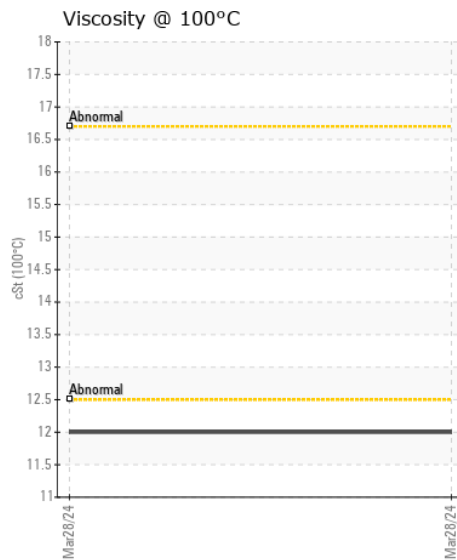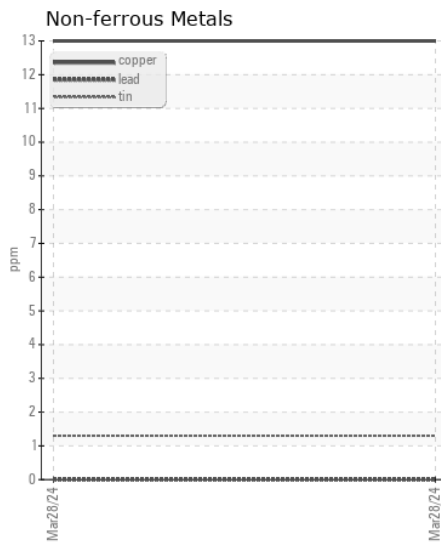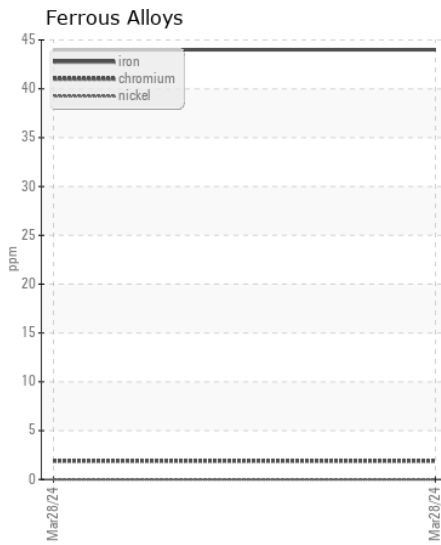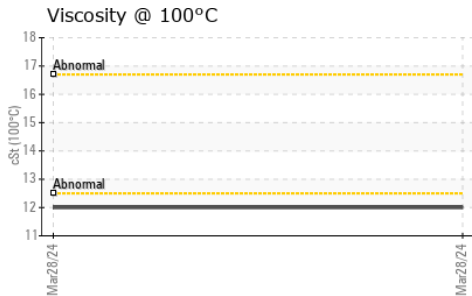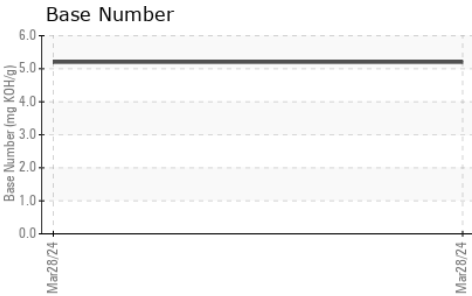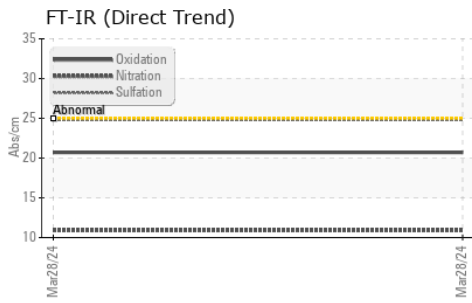

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : RPL06151646 **Received** : 17 Apr 2024
Lab Number : 06151646 **Tested** : 18 Apr 2024
Unique Number : 10981724 **Diagnosed** : 22 Apr 2024 - Jonathan Hester
Test Package : FLEET (Additional Tests: FuelDilution)

RTL PACLEASE - 7050 -Leasing Tyler
 10791 Hwy 69 North
 Tyler, TX
 US 75706
 Contact: Justin Cooper
 CooperJ1@RushEnterprises.Com
 T: (903)405-3000
 F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.
 * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)