



WEAR	ABNORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	ABNORMAL



Machine Id
JOHN DEERE 700H 940783
Component
Diesel Engine
Fluid
DIESEL ENGINE OIL SAE 50 (--- GAL)

RECOMMENDATION

No corrective action is recommended at this time. Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		JR0212439	---	---
Sample Date		Client Info		16 Apr 2024	---	---
Machine Age	hrs	Client Info		15344	---	---
Oil Age	hrs	Client Info		15344	---	---
Filter Age	hrs	Client Info		0	---	---
Oil Changed		Client Info		N/A	---	---
Filter Changed		Client Info		N/A	---	---
Sample Status				ABNORMAL	---	---

WEAR

Cylinder, crank, or cam shaft wear is indicated.

Iron	ppm	ASTM D5185m	>51	▲ 101	---	---
Chromium	ppm	ASTM D5185m	>11	2	---	---
Nickel	ppm	ASTM D5185m	>5	5	---	---
Titanium	ppm	ASTM D5185m		<1	---	---
Silver	ppm	ASTM D5185m	>3	0	---	---
Aluminum	ppm	ASTM D5185m	>31	11	---	---
Lead	ppm	ASTM D5185m	>26	9	---	---
Copper	ppm	ASTM D5185m	>26	3	---	---
Tin	ppm	ASTM D5185m	>4	<1	---	---
Vanadium	ppm	ASTM D5185m		0	---	---
White Metal	scalar	*Visual	NONE	NONE	---	---
Yellow Metal	scalar	*Visual	NONE	NONE	---	---

CONTAMINATION










There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>22	14	---	---
Potassium	ppm	ASTM D5185m	>20	6	---	---
Fuel		WC Method	>2.1	<1.0	---	---
Water		WC Method	>0.21	NEG	---	---
Glycol		WC Method		NEG	---	---
Soot %	%	*ASTM D7844	>3	1.4	---	---
Nitration	Abs/cm	*ASTM D7624	>20	12.9	---	---
Sulfation	Abs/.1mm	*ASTM D7415	>30	29.9	---	---
Silt	scalar	*Visual	NONE	NONE	---	---
Debris	scalar	*Visual	NONE	NONE	---	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---	---
Appearance	scalar	*Visual	NORML	NORML	---	---
Odor	scalar	*Visual	NORML	NORML	---	---
Emulsified Water	scalar	*Visual	>0.21	NEG	---	---

FLUID CONDITION

The oil viscosity is higher than normal. The BN result indicates that there is suitable alkalinity remaining in the oil.

Sodium	ppm	ASTM D5185m	>31	2	---	---
Boron	ppm	ASTM D5185m	250	82	---	---
Barium	ppm	ASTM D5185m	10	0	---	---
Molybdenum	ppm	ASTM D5185m	100	177	---	---
Manganese	ppm	ASTM D5185m		0	---	---
Magnesium	ppm	ASTM D5185m	450	663	---	---
Calcium	ppm	ASTM D5185m	3000	2088	---	---
Phosphorus	ppm	ASTM D5185m	1150	1223	---	---
Zinc	ppm	ASTM D5185m	1350	1428	---	---
Sulfur	ppm	ASTM D5185m	4250	3592	---	---
Oxidation	Abs/.1mm	*ASTM D7414	>25	25.5	---	---
Base Number (BN)	mg KOH/g	ASTM D2896	8.5	8.0	---	---
Visc @ 100°C	cSt	ASTM D445	19.1	▲ 17.2	---	---

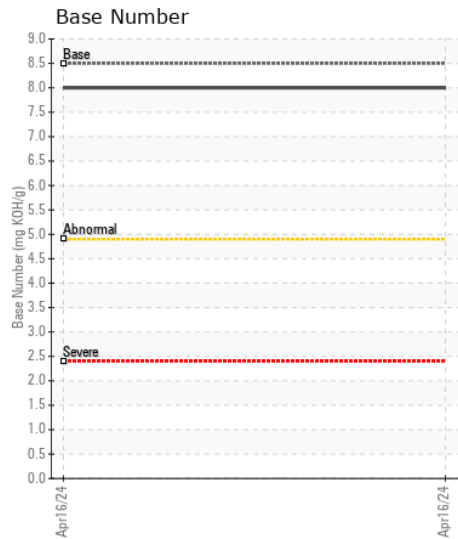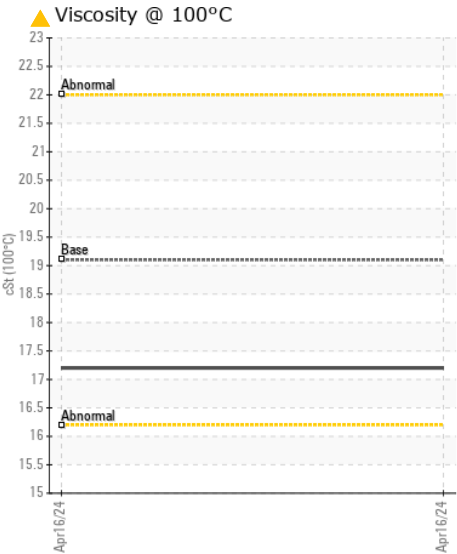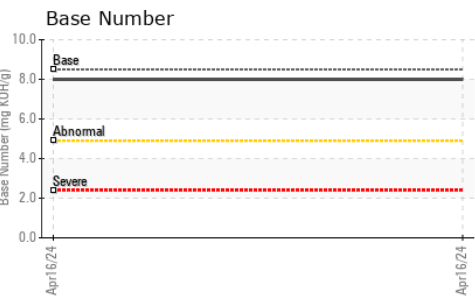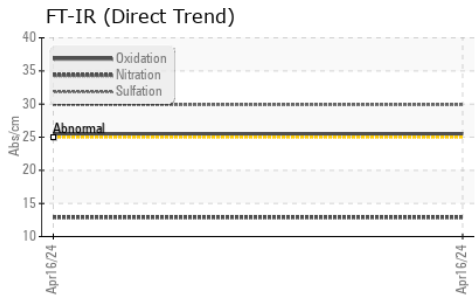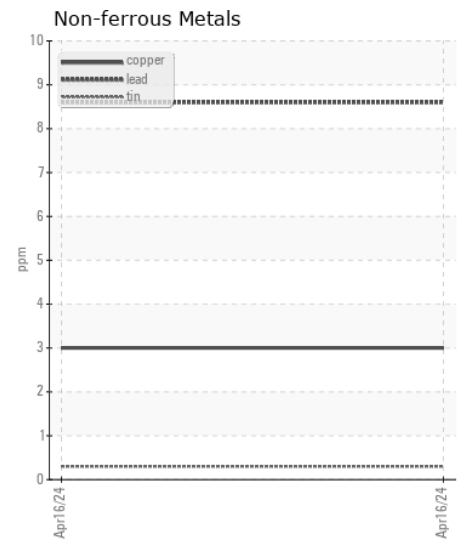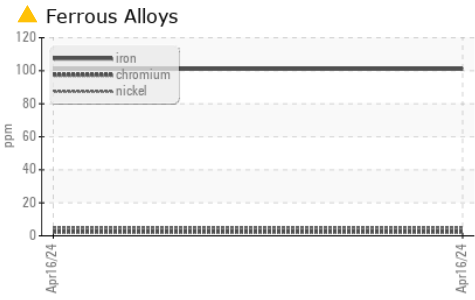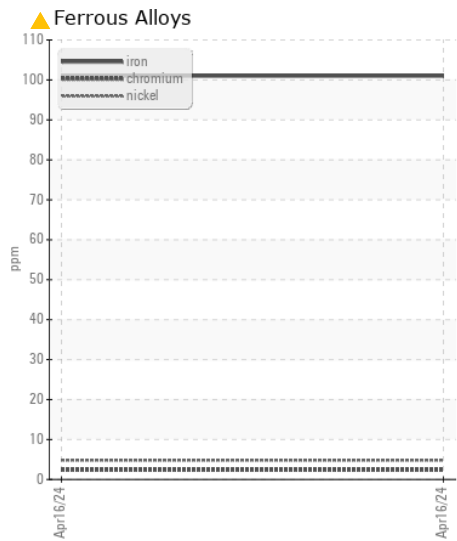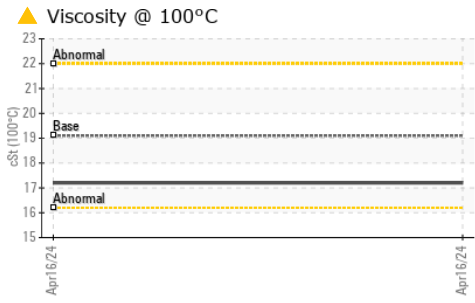

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : JR0212439 **Received** : 17 Apr 2024
Lab Number : 06151734 **Tested** : 18 Apr 2024
Unique Number : 10981812 **Diagnosed** : 19 Apr 2024 - Sean Felton
Test Package : CONST (Additional Tests: TBN)

JRE - GARNER
 4161 AUBURN CHURCH RD
 GARNER, NC
 US 27529
 Contact: RALEIGH SHOP
 sean.betts@jamesriverequipment.com; catherine.anastasio@wearcheck.com
 T: (919)614-2260
 F: (919)779-5432

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)