



WEAR	<b>NORMAL</b>
CONTAMINATION	<b>NORMAL</b>
FLUID CONDITION	<b>NORMAL</b>



Machine Id  
**JOHN DEERE 650K-II 1T0650KKTNF433022**  
 Component  
**Hydraulic System**  
 Fluid  
**{not provided} (--- GAL)**

### RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		<b>JR0212964</b>	JR0194587	---
Sample Date		Client Info		<b>14 Apr 2024</b>	01 Jan 2024	---
Machine Age	hrs	Client Info		<b>2157</b>	1592	---
Oil Age	hrs	Client Info		<b>2157</b>	0	---
Filter Age	hrs	Client Info		<b>0</b>	0	---
Oil Changed		Client Info		<b>Changed</b>	N/A	---
Filter Changed		Client Info		<b>Changed</b>	N/A	---
Sample Status				<b>NORMAL</b>	NORMAL	---

### WEAR

All component wear rates are normal.

PQ		ASTM D8184	>50	<b>13</b>	13	---
Iron	ppm	ASTM D5185m	>23	<b>5</b>	5	---
Chromium	ppm	ASTM D5185m	>9	<b>&lt;1</b>	0	---
Nickel	ppm	ASTM D5185m	>5	<b>0</b>	0	---
Titanium	ppm	ASTM D5185m		<b>0</b>	0	---
Silver	ppm	ASTM D5185m		<b>0</b>	0	---
Aluminum	ppm	ASTM D5185m	>9	<b>0</b>	0	---
Lead	ppm	ASTM D5185m	>28	<b>&lt;1</b>	<1	---
Copper	ppm	ASTM D5185m	>51	<b>12</b>	11	---
Tin	ppm	ASTM D5185m	>5	<b>0</b>	0	---
Vanadium	ppm	ASTM D5185m		<b>0</b>	0	---
White Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	---
Yellow Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	---

### CONTAMINATION











The amount and size of particulates present in the system are acceptable. There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>31	<b>&lt;1</b>	1	---
Potassium	ppm	ASTM D5185m	>20	<b>7</b>	<1	---
Water		WC Method	>0.075	<b>NEG</b>	NEG	---
Particles >4µm		ASTM D7647	>80000	<b>994</b>	1426	---
Particles >6µm		ASTM D7647	>20000	<b>199</b>	181	---
Particles >14µm		ASTM D7647	>640	<b>21</b>	15	---
Particles >21µm		ASTM D7647	>160	<b>8</b>	4	---
Particles >38µm		ASTM D7647	>40	<b>1</b>	0	---
Particles >71µm		ASTM D7647	>10	<b>0</b>	0	---
Oil Cleanliness		ISO 4406 (c)	>23/21/16	<b>17/15/12</b>	18/15/11	---
Silt	scalar	*Visual	NONE	<b>NONE</b>	NONE	---
Debris	scalar	*Visual	NONE	<b>NONE</b>	NONE	---
Sand/Dirt	scalar	*Visual	NONE	<b>NONE</b>	NONE	---
Appearance	scalar	*Visual	NORML	<b>NORML</b>	NORML	---
Odor	scalar	*Visual	NORML	<b>NORML</b>	NORML	---
Emulsified Water	scalar	*Visual	>0.075	<b>NEG</b>	NEG	---

### FLUID CONDITION

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m	>21	<b>2</b>	<1	---
Boron	ppm	ASTM D5185m		<b>0</b>	0	---
Barium	ppm	ASTM D5185m		<b>&lt;1</b>	0	---
Molybdenum	ppm	ASTM D5185m		<b>0</b>	0	---
Manganese	ppm	ASTM D5185m		<b>0</b>	0	---
Magnesium	ppm	ASTM D5185m		<b>0</b>	0	---
Calcium	ppm	ASTM D5185m		<b>75</b>	94	---
Phosphorus	ppm	ASTM D5185m		<b>575</b>	696	---
Zinc	ppm	ASTM D5185m		<b>722</b>	896	---
Sulfur	ppm	ASTM D5185m		<b>1660</b>	1750	---
Acid Number (AN)	mg KOH/g	ASTM D8045		<b>0.78</b>	0.81	---
Visc @ 40°C	cSt	ASTM D445		<b>55.3</b>	55.9	---

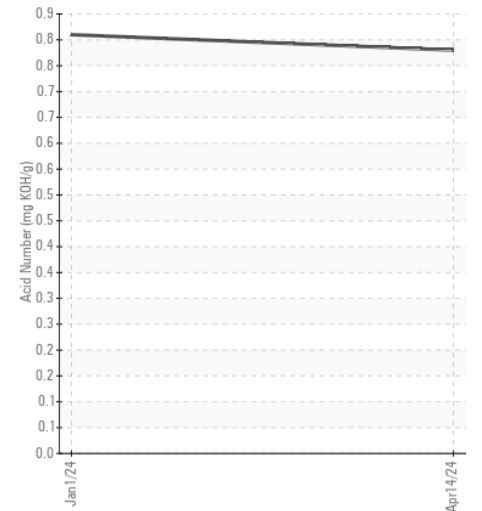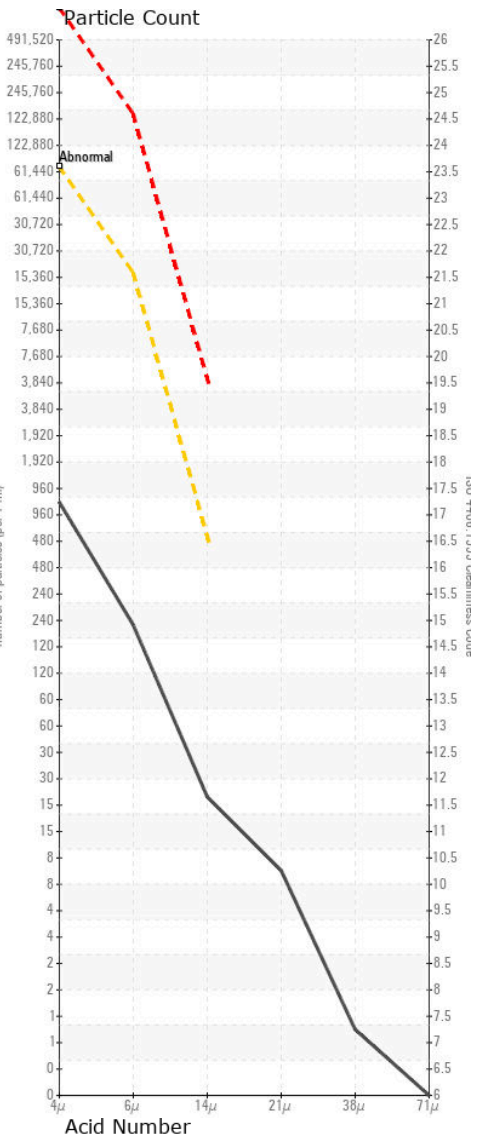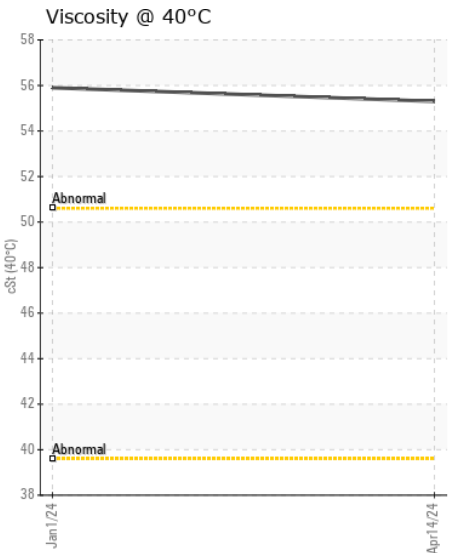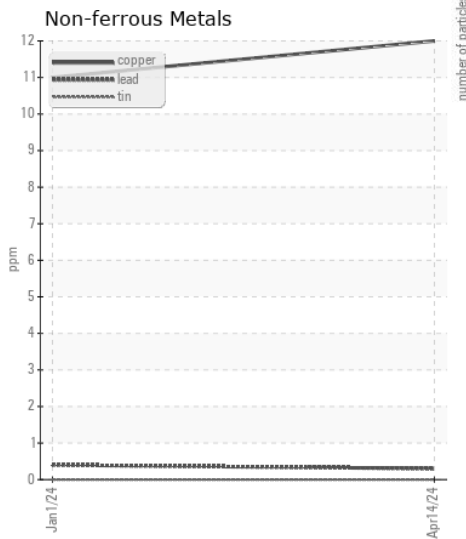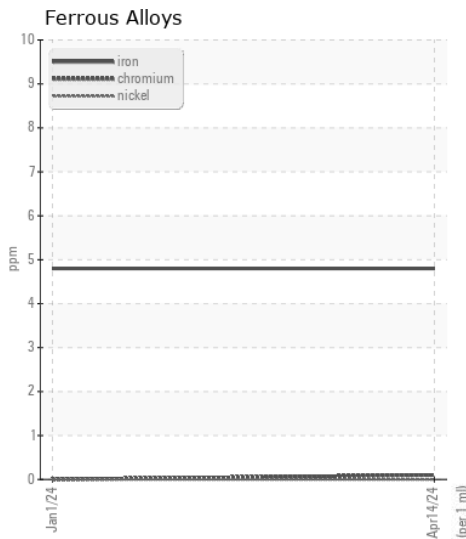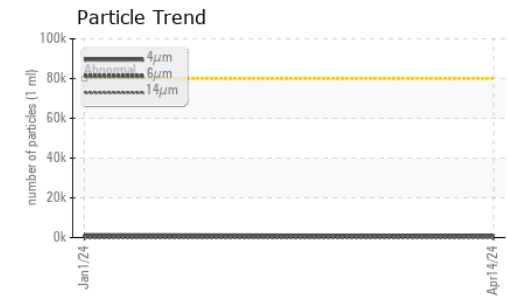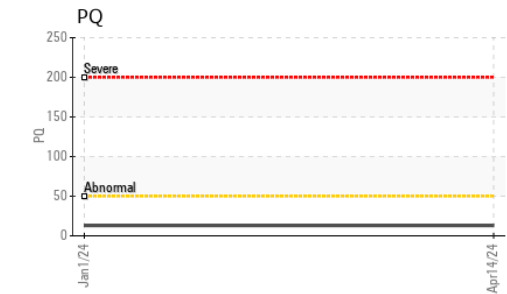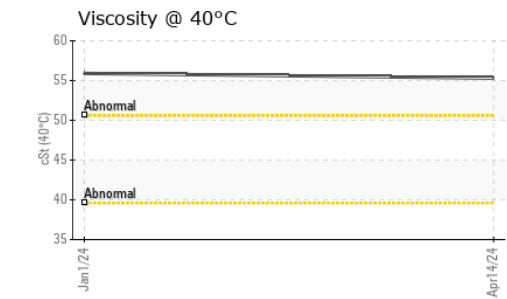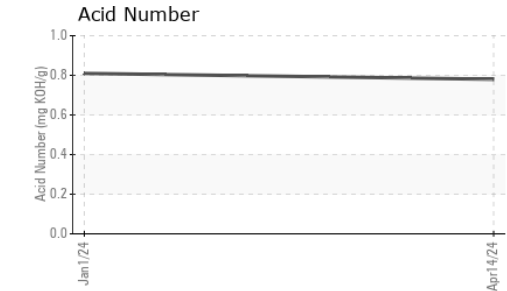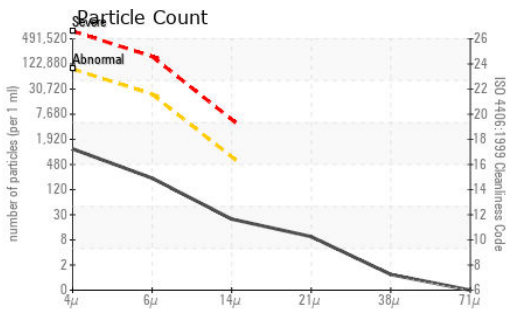

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513

Sample No. : JR0212964

Lab Number : 06151889

Unique Number : 10981967

Test Package : CONST ( Additional Tests: PQ )

Received : 17 Apr 2024

Tested : 18 Apr 2024

Diagnosed : 19 Apr 2024 - Don Baldrige

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

JRE - GARNER

4161 AUBURN CHURCH RD

GARNER, NC

US 27529

Contact: RALEIGH SHOP

sean.betts@jamesriverequipment.com; catherine.anastasio@wearcheck.com

T: (919)614-2260

F: (919)779-5432