



OIL ANALYSIS REPORT

WEAR	ABNORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Machine Id
MANITOU MHT12330 MH9040 (S/N P20967)
 Component
Rear Right Final Drive
 Fluid
GEAR OIL LS 80W90 (--- GAL)

RECOMMENDATION

No corrective action is recommended at this time. We recommend an early resample to monitor this condition.

WEAR

Gear wear is indicated.

CONTAMINATION




There is no indication of any contamination in the oil.

FLUID CONDITION





The AN level is acceptable for this fluid. The condition of the oil is acceptable for the time in service.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		HPL0002649	HPL0002430	---
Sample Date		Client Info		15 Apr 2024	13 Sep 2023	---
Machine Age	hrs	Client Info		0	364	---
Oil Age	hrs	Client Info		0	0	---
Filter Age	hrs	Client Info		0	0	---
Oil Changed		Client Info		N/A	N/A	---
Filter Changed		Client Info		N/A	N/A	---
Sample Status				ABNORMAL	ABNORMAL	---
Iron	ppm	ASTM D5185m	>500	▲ 529	151	---
Chromium	ppm	ASTM D5185m	>10	▲ 14	5	---
Nickel	ppm	ASTM D5185m	>10	1	<1	---
Titanium	ppm	ASTM D5185m		<1	<1	---
Silver	ppm	ASTM D5185m		0	0	---
Aluminum	ppm	ASTM D5185m	>25	2	<1	---
Lead	ppm	ASTM D5185m	>25	0	<1	---
Copper	ppm	ASTM D5185m	>50	1	<1	---
Tin	ppm	ASTM D5185m	>10	<1	<1	---
Vanadium	ppm	ASTM D5185m		0	0	---
White Metal	scalar	*Visual	NONE	NONE	▲ HEAVY	---
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	---
Silicon	ppm	ASTM D5185m	>75	21	6	---
Potassium	ppm	ASTM D5185m	>20	8	7	---
Water		WC Method	>0.2	NEG	NEG	---
Silt	scalar	*Visual	NONE	NONE	NONE	---
Debris	scalar	*Visual	NONE	NONE	NONE	---
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	NORML	---
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG	---
Sodium	ppm	ASTM D5185m		3	8	---
Boron	ppm	ASTM D5185m	150	18	1	---
Barium	ppm	ASTM D5185m		0	0	---
Molybdenum	ppm	ASTM D5185m		8	6	---
Manganese	ppm	ASTM D5185m		17	10	---
Magnesium	ppm	ASTM D5185m	10	10	15	---
Calcium	ppm	ASTM D5185m	70	633	2812	---
Phosphorus	ppm	ASTM D5185m	2000	1923	1022	---
Zinc	ppm	ASTM D5185m	50	325	1235	---
Sulfur	ppm	ASTM D5185m	20000	27882	11440	---
Acid Number (AN)	mg KOH/g	ASTM D8045		1.68	1.61	---
Visc @ 40°C	cSt	ASTM D445	140	200	81.9	---





▲ Ferrous Alloys

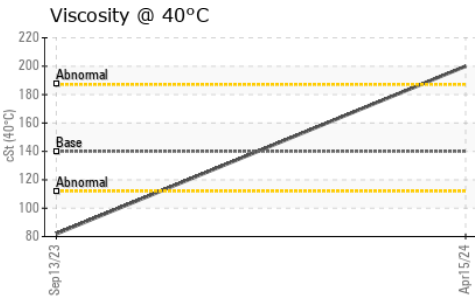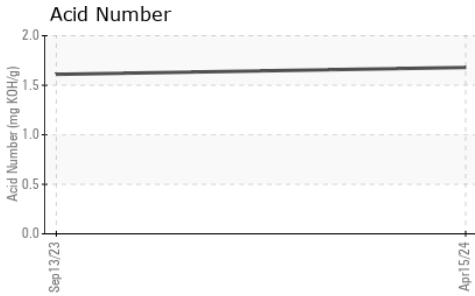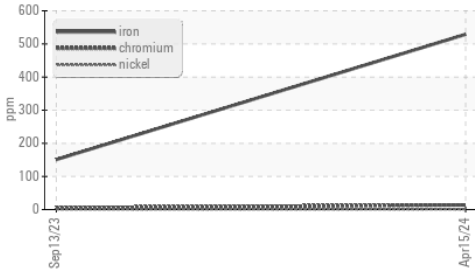

▲ Iron (ppm)

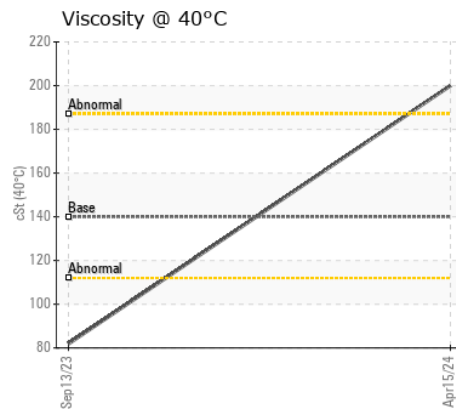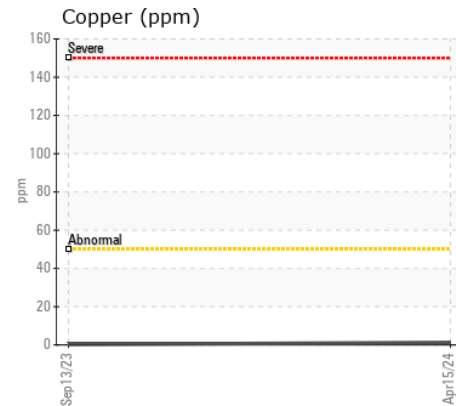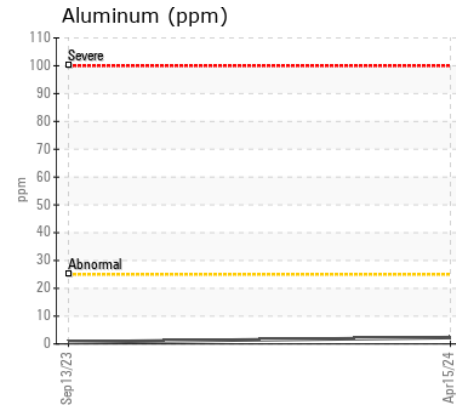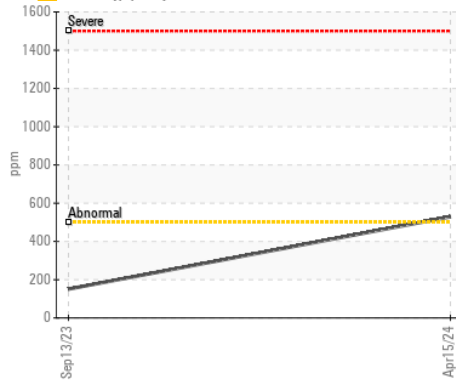

Lead (ppm)

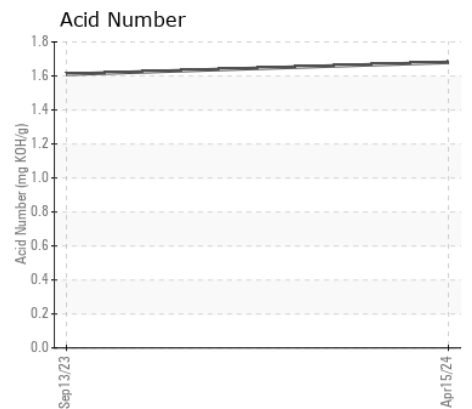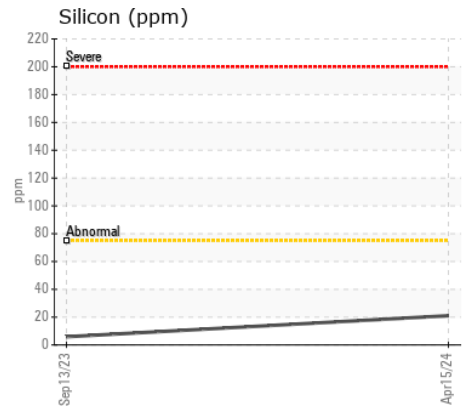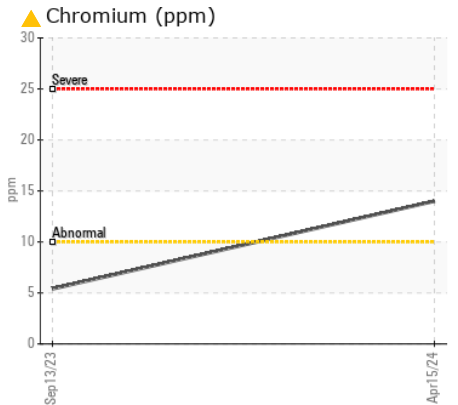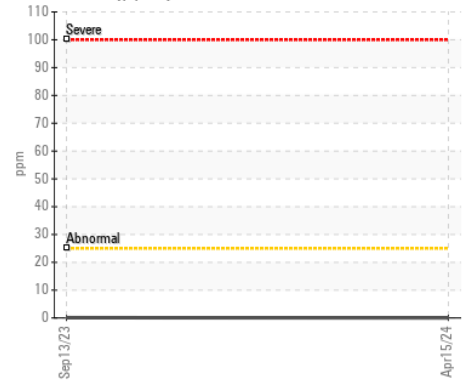

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513

Sample No. : HPL0002649

Lab Number : 06152159

Unique Number : 10982237

Test Package : MOB 2

Received : 17 Apr 2024

Tested : 19 Apr 2024

Diagnosed : 22 Apr 2024 - Don Baldrige

STEVENS ON CRANE

410 STEVENSON DR

BOLINGBROOK, IL

US 60440

Contact: DAVE KOEHNE

davidk@stevensoncrane.com

T: (630)972-9199

F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)