



# OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Area  
**WCLSNC**  
 Machine Id  
**QC230801DE**  
 Component  
**Diesel Engine**  
 Fluid  
**PETRO CANADA DURON SHP 15W40 (--- GAL)**

## RECOMMENDATION

Little or no information is provided as to the component and lubricant being tested. Recommendations are therefore generic in nature and may not apply to the current application. Please forward information as to equipment type, reservoir capacity, lubricant type and any pertinent information to allow for a more accurate assessment. Resample at the next service interval to monitor. NOTE: Please provide information regarding reservoir capacity, filter type and micron rating with next sample. Please specify the brand, type, and viscosity of the oil on your next sample.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		<b>WC0929371</b>	WC0929370	WC0929369
Sample Date		Client Info		<b>17 Apr 2024</b>	16 Apr 2024	15 Apr 2024
Machine Age	hrs	Client Info		<b>0</b>	0	0
Oil Age	hrs	Client Info		<b>0</b>	0	0
Filter Age	hrs	Client Info		<b>0</b>	0	0
Oil Changed		Client Info		<b>N/A</b>	N/A	N/A
Filter Changed		Client Info		<b>N/A</b>	N/A	N/A
Sample Status				<b>NORMAL</b>	NORMAL	NORMAL

## WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>11	<b>8</b>	9	9
Chromium	ppm	ASTM D5185m	>3	<b>&lt;1</b>	<1	<1
Nickel	ppm	ASTM D5185m	>2	<b>&lt;1</b>	0	0
Titanium	ppm	ASTM D5185m	>2	<b>0</b>	0	0
Silver	ppm	ASTM D5185m	>2	<b>&lt;1</b>	0	0
Aluminum	ppm	ASTM D5185m	>5	<b>3</b>	2	2
Lead	ppm	ASTM D5185m	>2	<b>0</b>	0	0
Copper	ppm	ASTM D5185m	>7	<b>4</b>	4	4
Tin	ppm	ASTM D5185m	>2	<b>&lt;1</b>	0	0
Vanadium	ppm	ASTM D5185m		<b>0</b>	0	<1
White Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE

## CONTAMINATION














The system cleanliness is acceptable for your target ISO 4406 cleanliness code. The water content is negligible. The system and fluid cleanliness is acceptable.

Silicon	ppm	ASTM D5185m	>14	<b>4</b>	4	4
Potassium	ppm	ASTM D5185m	>20	<b>5</b>	3	<1
Fuel	%	ASTM D3524	>4.1	<b>2.5</b>	2.5	2.4
Water	%	ASTM D6304	>0.2	<b>NEG</b>	NEG	NEG
Glycol	%	*ASTM D2982		<b>NEG</b>	NEG	0.0
Soot %	%	*ASTM D7844	>0.3	<b>0.1</b>	0.1	0.1
Nitration	Abs/cm	*ASTM D7624	>10.8	<b>10.4</b>	10.4	10.4
Sulfation	Abs/.1mm	*ASTM D7415	>20.8	<b>20.2</b>	20.2	20.2
Silt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Debris	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Appearance	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Odor	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	<b>NEG</b>	NEG	NEG

## FLUID CONDITION

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m	>13	<b>8</b>	7	8
Boron	ppm	ASTM D5185m	0	<b>10</b>	6	5
Barium	ppm	ASTM D5185m	0	<b>0</b>	0	0
Molybdenum	ppm	ASTM D5185m	60	<b>48</b>	53	52
Manganese	ppm	ASTM D5185m	0	<b>&lt;1</b>	0	<1
Magnesium	ppm	ASTM D5185m	1010	<b>526</b>	525	564
Calcium	ppm	ASTM D5185m	1070	<b>1444</b>	1517	1639
Phosphorus	ppm	ASTM D5185m	1150	<b>713</b>	728	702
Zinc	ppm	ASTM D5185m	1270	<b>920</b>	947	917
Sulfur	ppm	ASTM D5185m	2060	<b>2726</b>	2344	2986
Oxidation	Abs/.1mm	*ASTM D7414	>17.9	<b>17.4</b>	17.5	17.4
Acid Number (AN)	mg KOH/g	ASTM D8045	3.2	<b>0.44</b>	0.85	0.47
Base Number (BN)	mg KOH/g	ASTM D2896	9.8	<b>7.44</b>	6.63	7.98
Visc @ 40°C	cSt	ASTM D445	113.9	<b>98.3</b>	98.8	98.6
Visc @ 100°C	cSt	ASTM D445	15.4	<b>13.4</b>	13.3	13.4
Viscosity Index (VI)	Scale	ASTM D2270	142	<b>135</b>	133	135

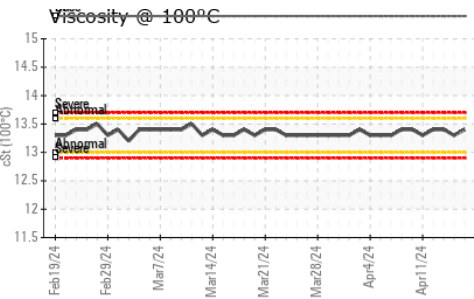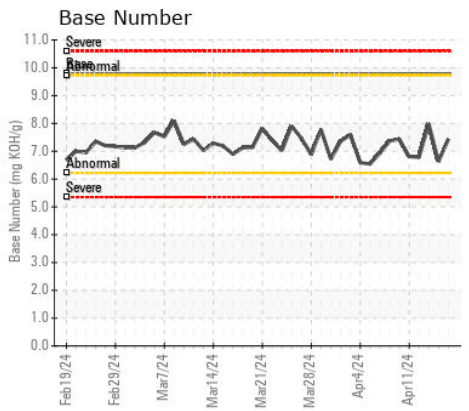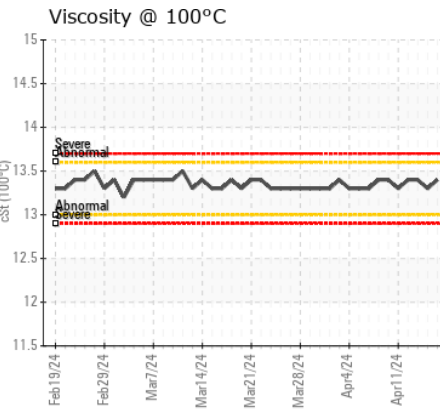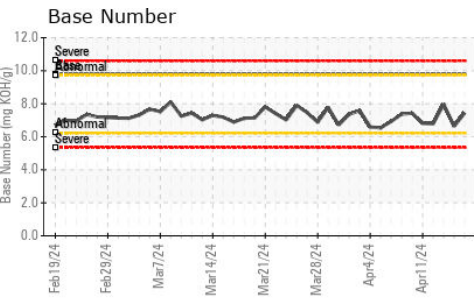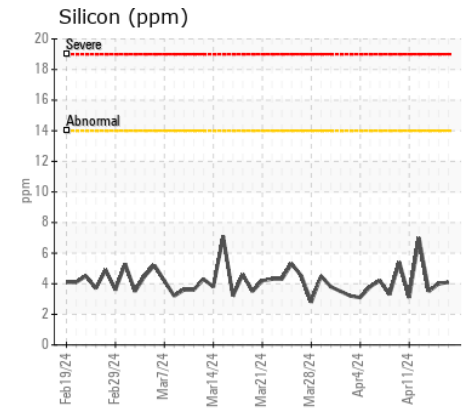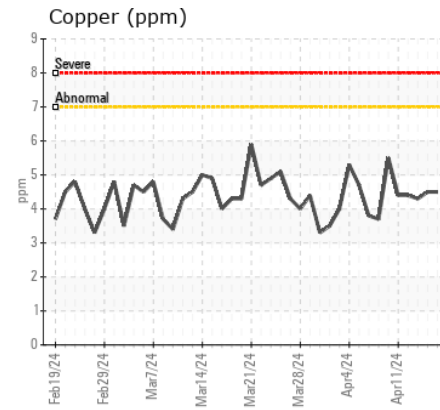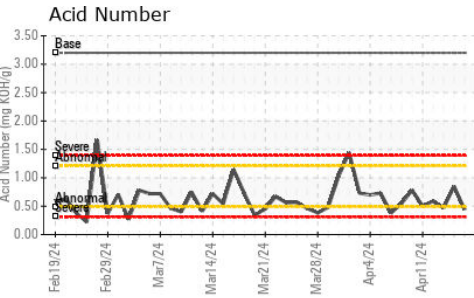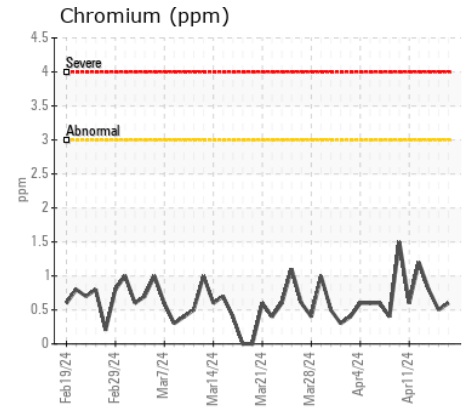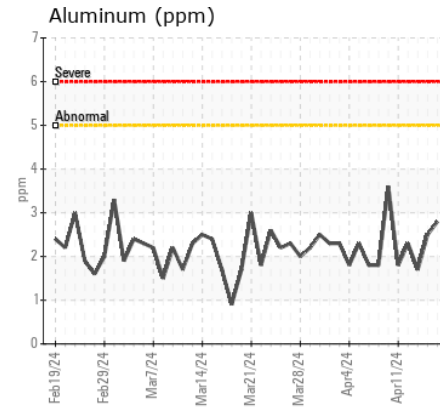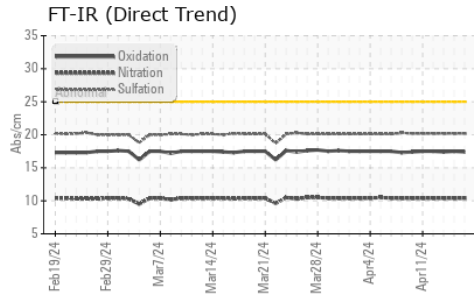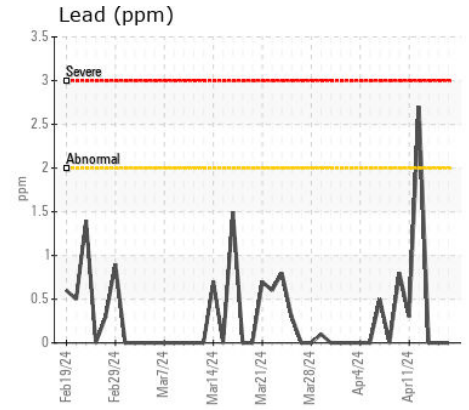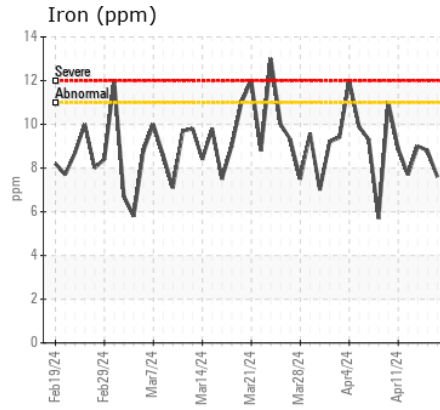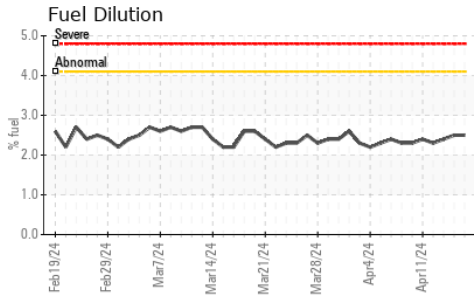

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : WC0929371  
**Lab Number** : 06152171  
**Unique Number** : 10982249  
**Test Package** : MOB 2 ( Additional Tests: FuelDilution, Glycol, KF, KV40, PercentFuel, VI )

**Received** : 17 Apr 2024  
**Tested** : 22 Apr 2024  
**Diagnosed** : 22 Apr 2024 - Sean Felton

**WEARCHECK LUBRICATION SERVICES QA ACCOUNT**  
 501 Madison Ave  
 Cary, NC  
 US 27513  
 Contact: WCLS CARY NC

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T: (919)379-4102  
 F: (919)379-4050