



# OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL



Machine Id  
**MACK MD-6 VD1338**  
Component  
**Diesel Engine**  
Fluid  
**DURALENE Dura-Max Xtreme 15W40 (--- GAL)**

## RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		DC0033837	---	---
Sample Date		Client Info		16 Apr 2024	---	---
Machine Age	mls	Client Info		25036	---	---
Oil Age	mls	Client Info		10000	---	---
Filter Age	mls	Client Info		10000	---	---
Oil Changed		Client Info		Changed	---	---
Filter Changed		Client Info		Changed	---	---
Sample Status				NORMAL	---	---

## WEAR

Metal levels are typical for a new component breaking in.

Iron	ppm	ASTM D5185m	>120	47	---	---
Chromium	ppm	ASTM D5185m	>20	2	---	---
Nickel	ppm	ASTM D5185m	>5	0	---	---
Titanium	ppm	ASTM D5185m	>2	0	---	---
Silver	ppm	ASTM D5185m	>2	0	---	---
Aluminum	ppm	ASTM D5185m	>20	11	---	---
Lead	ppm	ASTM D5185m	>40	0	---	---
Copper	ppm	ASTM D5185m	>330	9	---	---
Tin	ppm	ASTM D5185m	>15	1	---	---
Vanadium	ppm	ASTM D5185m		0	---	---
White Metal	scalar	*Visual	NONE	NONE	---	---
Yellow Metal	scalar	*Visual	NONE	NONE	---	---

## CONTAMINATION












There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>25	14	---	---
Potassium	ppm	ASTM D5185m	>20	15	---	---
Fuel		WC Method	>3.0	<1.0	---	---
Water		WC Method	>0.2	NEG	---	---
Glycol		WC Method		NEG	---	---
Soot %	%	*ASTM D7844	>4	0.4	---	---
Nitration	Abs/cm	*ASTM D7624	>20	11.0	---	---
Sulfation	Abs/.1mm	*ASTM D7415	>30	22.9	---	---
Silt	scalar	*Visual	NONE	NONE	---	---
Debris	scalar	*Visual	NONE	NONE	---	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---	---
Appearance	scalar	*Visual	NORML	NORML	---	---
Odor	scalar	*Visual	NORML	NORML	---	---
Emulsified Water	scalar	*Visual	>0.2	NEG	---	---

## FLUID CONDITION

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m		5	---	---
Boron	ppm	ASTM D5185m		38	---	---
Barium	ppm	ASTM D5185m		0	---	---
Molybdenum	ppm	ASTM D5185m		53	---	---
Manganese	ppm	ASTM D5185m		2	---	---
Magnesium	ppm	ASTM D5185m		499	---	---
Calcium	ppm	ASTM D5185m		1722	---	---
Phosphorus	ppm	ASTM D5185m		949	---	---
Zinc	ppm	ASTM D5185m		1125	---	---
Sulfur	ppm	ASTM D5185m		3563	---	---
Oxidation	Abs/.1mm	*ASTM D7414	>25	22.4	---	---
Base Number (BN)	mg KOH/g	ASTM D2896		7.36	---	---
Visc @ 100°C	cSt	ASTM D445		12.5	---	---

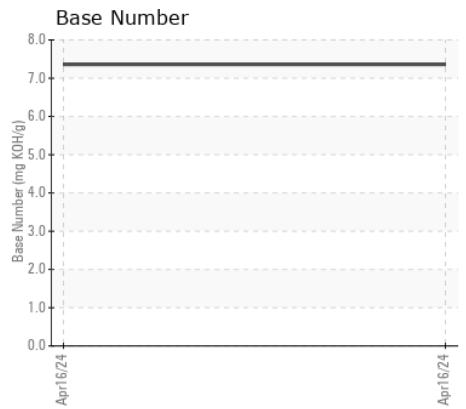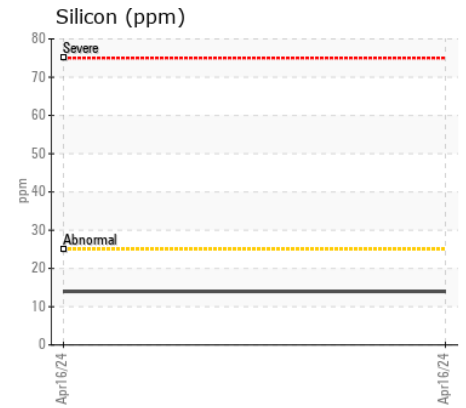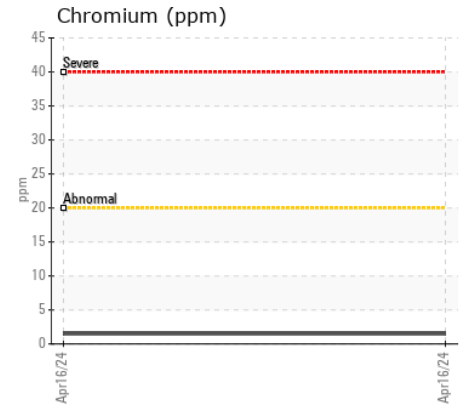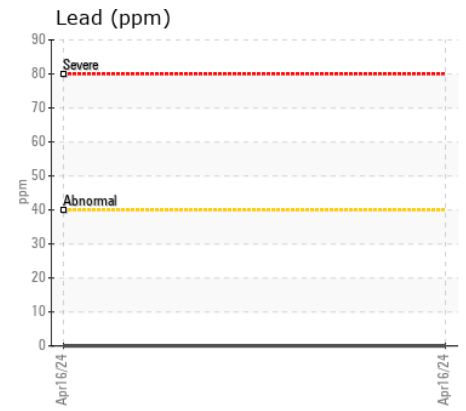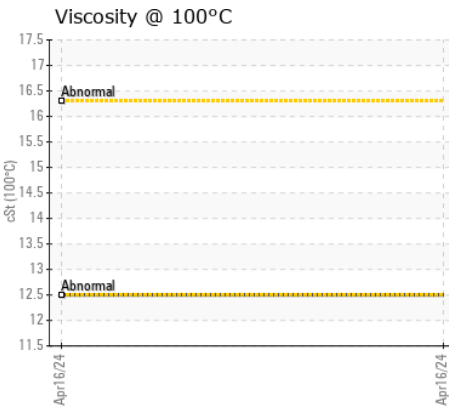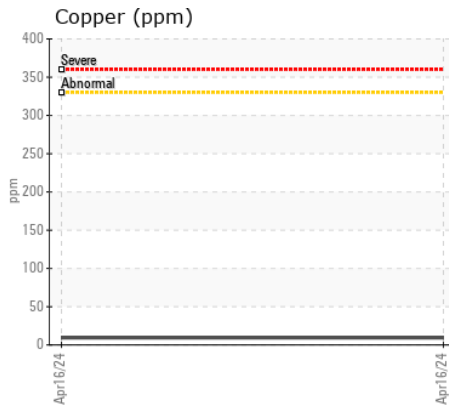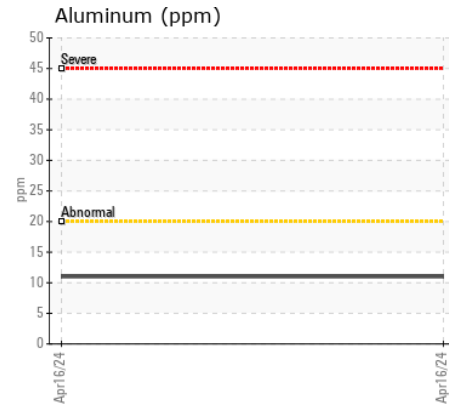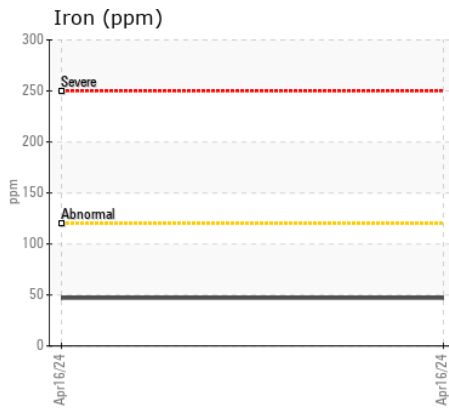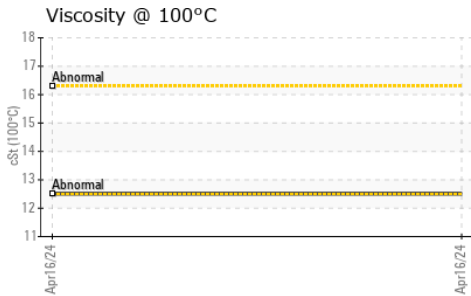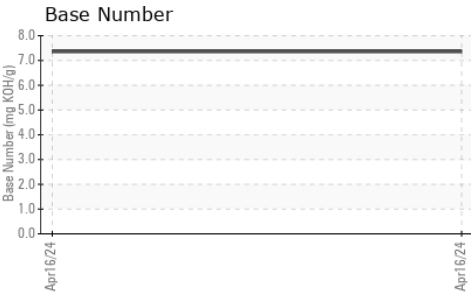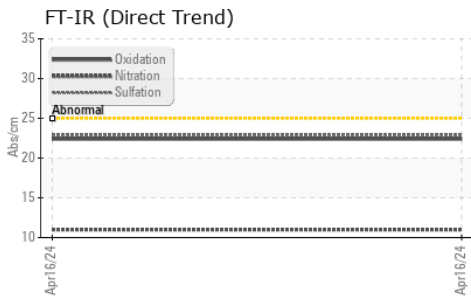

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : DC0033837 **Received** : 17 Apr 2024  
**Lab Number** : 06152189 **Tested** : 18 Apr 2024  
**Unique Number** : 10982267 **Diagnosed** : 18 Apr 2024 - Wes Davis  
**Test Package** : MOB 2

**COMER CONSTRUCTION**  
 2100 SLADE LANE  
 FOREST HILL, MD  
 US 21050  
 Contact: DONALD FOX  
 dfox@comerconstruction.com  
 T: (443)269-1379  
 F: (410)638-0289

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)