



OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Area

[G14819]

Machine Id

JOHN DEERE 530545

Component

Pump Drive

Fluid

JOHN DEERE ENGINE OIL PLUS 50 II 15W40 (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		WE0007189	---	---
Sample Date		Client Info		11 Apr 2024	---	---
Machine Age	hrs	Client Info		1294	---	---
Oil Age	hrs	Client Info		0	---	---
Filter Age	hrs	Client Info		0	---	---
Oil Changed		Client Info		Not Changd	---	---
Filter Changed		Client Info		Not Changd	---	---
Sample Status				NORMAL	---	---

WEAR

All component wear rates are normal.

PQ		ASTM D8184		27	---	---
Iron	ppm	ASTM D5185m	>151	89	---	---
Chromium	ppm	ASTM D5185m	>11	2	---	---
Nickel	ppm	ASTM D5185m	>10	0	---	---
Titanium	ppm	ASTM D5185m		<1	---	---
Silver	ppm	ASTM D5185m		0	---	---
Aluminum	ppm	ASTM D5185m	>21	4	---	---
Lead	ppm	ASTM D5185m	>51	0	---	---
Copper	ppm	ASTM D5185m	>51	3	---	---
Tin	ppm	ASTM D5185m	>4	<1	---	---
Vanadium	ppm	ASTM D5185m		0	---	---
White Metal	scalar	*Visual	NONE	NONE	---	---
Yellow Metal	scalar	*Visual	NONE	NONE	---	---

CONTAMINATION







There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>31	18	---	---
Potassium	ppm	ASTM D5185m	>20	3	---	---
Water		WC Method	>0.1	NEG	---	---
Silt	scalar	*Visual	NONE	NONE	---	---
Debris	scalar	*Visual	NONE	NONE	---	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---	---
Appearance	scalar	*Visual	NORML	NORML	---	---
Odor	scalar	*Visual	NORML	NORML	---	---
Emulsified Water	scalar	*Visual	>0.1	NEG	---	---

FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185m	>51	5	---	---
Boron	ppm	ASTM D5185m		64	---	---
Barium	ppm	ASTM D5185m		4	---	---
Molybdenum	ppm	ASTM D5185m		100	---	---
Manganese	ppm	ASTM D5185m		3	---	---
Magnesium	ppm	ASTM D5185m		14	---	---
Calcium	ppm	ASTM D5185m		3904	---	---
Phosphorus	ppm	ASTM D5185m		1266	---	---
Zinc	ppm	ASTM D5185m		1351	---	---
Sulfur	ppm	ASTM D5185m		9391	---	---
Visc @ 40°C	cSt	ASTM D445	117	61.7	---	---

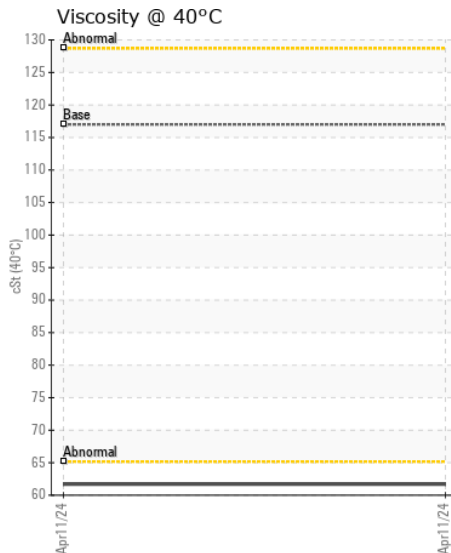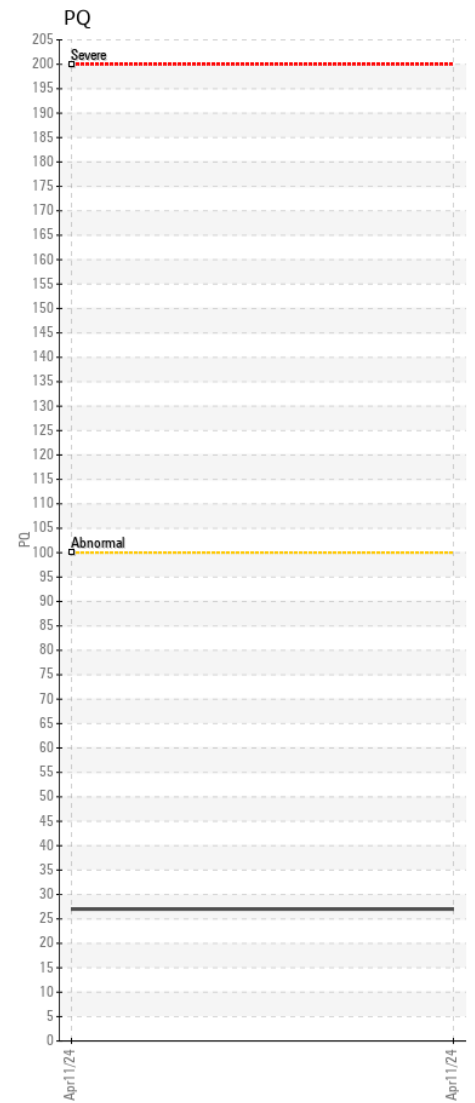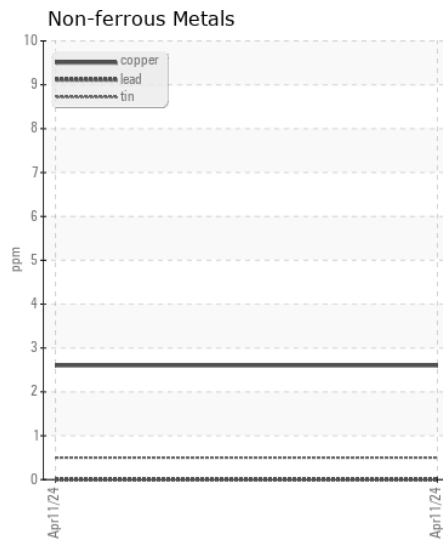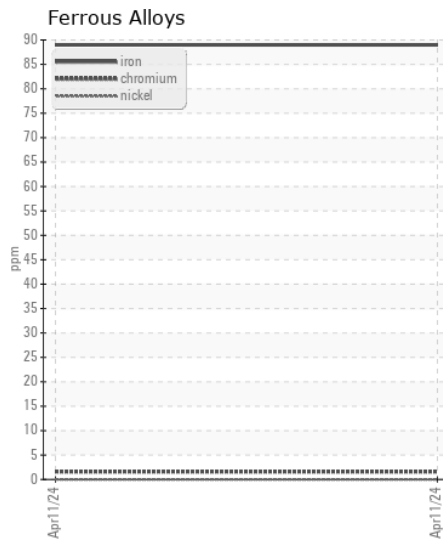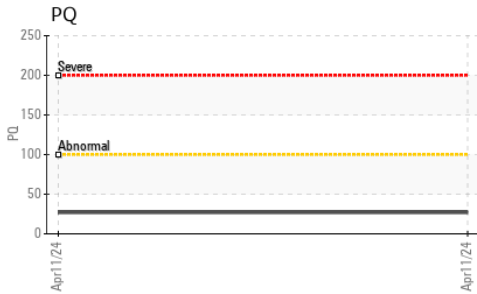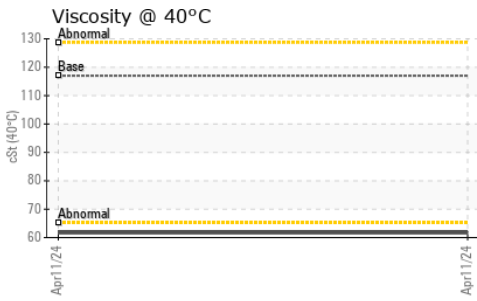

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513

Sample No. : WE0007189

Lab Number : 06152220

Unique Number : 10982298

Test Package : CONST (Additional Tests: PQ)

Received : 17 Apr 2024

Tested : 18 Apr 2024

Diagnosed : 22 Apr 2024 - Don Baldrige

WARRIOR TRACTOR AND EQUIPMENT - GRAYSVILLE

4308 WATER TRAIL

GRAYSVILLE, AL

US 35073

Contact: BEN BYRKET

bbyrket@warriortractor.com

T: (205)675-9045

F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)