



WEAR	<b>NORMAL</b>
CONTAMINATION	<b>NORMAL</b>
FLUID CONDITION	<b>NORMAL</b>



Machine Id  
**JOHN DEERE 700H 940783**  
 Component  
**Left Final Drive**  
 Fluid  
**{not provided} (--- GAL)**

### RECOMMENDATION

Resample at the next service interval to monitor. Please specify the brand, type, and viscosity of the oil on your next sample. ( Customer Sample Comment: Final drive, left side, overfilled with trans oil )

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		<b>JR0212435</b>	---	---
Sample Date		Client Info		<b>16 Apr 2024</b>	---	---
Machine Age	hrs	Client Info		<b>15344</b>	---	---
Oil Age	hrs	Client Info		<b>15344</b>	---	---
Filter Age	hrs	Client Info		<b>0</b>	---	---
Oil Changed		Client Info		<b>N/A</b>	---	---
Filter Changed		Client Info		<b>N/A</b>	---	---
Sample Status				<b>NORMAL</b>	---	---

### WEAR

All component wear rates are normal.

PQ		ASTM D8184	>1250	<b>115</b>	---	---
Iron	ppm	ASTM D5185m	>750	<b>306</b>	---	---
Chromium	ppm	ASTM D5185m	>9	<b>3</b>	---	---
Nickel	ppm	ASTM D5185m	>10	<b>2</b>	---	---
Titanium	ppm	ASTM D5185m		<b>&lt;1</b>	---	---
Silver	ppm	ASTM D5185m		<b>&lt;1</b>	---	---
Aluminum	ppm	ASTM D5185m	>40	<b>6</b>	---	---
Lead	ppm	ASTM D5185m	>15	<b>2</b>	---	---
Copper	ppm	ASTM D5185m	>40	<b>4</b>	---	---
Tin	ppm	ASTM D5185m	>10	<b>&lt;1</b>	---	---
Vanadium	ppm	ASTM D5185m		<b>&lt;1</b>	---	---
White Metal	scalar	*Visual	NONE	<b>NONE</b>	---	---
Yellow Metal	scalar	*Visual	NONE	<b>NONE</b>	---	---

### CONTAMINATION







There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>75	<b>27</b>	---	---
Potassium	ppm	ASTM D5185m	>20	<b>4</b>	---	---
Water		WC Method	>0.075	<b>NEG</b>	---	---
Silt	scalar	*Visual	NONE	<b>NONE</b>	---	---
Debris	scalar	*Visual	NONE	<b>NONE</b>	---	---
Sand/Dirt	scalar	*Visual	NONE	<b>NONE</b>	---	---
Appearance	scalar	*Visual	NORML	<b>NORML</b>	---	---
Odor	scalar	*Visual	NORML	<b>NORML</b>	---	---
Emulsified Water	scalar	*Visual	>0.075	<b>NEG</b>	---	---

### FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185m	>51	<b>2</b>	---	---
Boron	ppm	ASTM D5185m		<b>161</b>	---	---
Barium	ppm	ASTM D5185m		<b>&lt;1</b>	---	---
Molybdenum	ppm	ASTM D5185m		<b>119</b>	---	---
Manganese	ppm	ASTM D5185m		<b>4</b>	---	---
Magnesium	ppm	ASTM D5185m		<b>416</b>	---	---
Calcium	ppm	ASTM D5185m		<b>2224</b>	---	---
Phosphorus	ppm	ASTM D5185m		<b>1057</b>	---	---
Zinc	ppm	ASTM D5185m		<b>1067</b>	---	---
Sulfur	ppm	ASTM D5185m		<b>3733</b>	---	---
Visc @ 40°C	cSt	ASTM D445		<b>55.5</b>	---	---

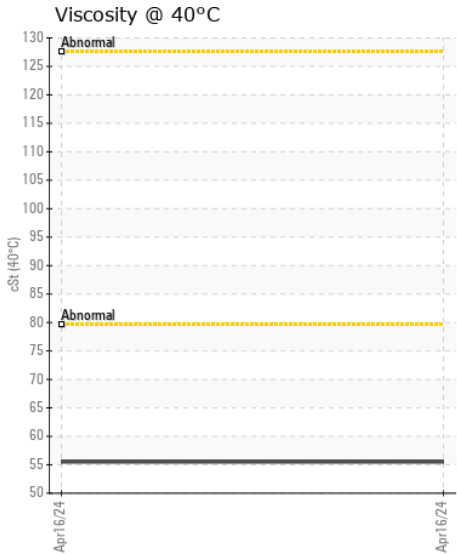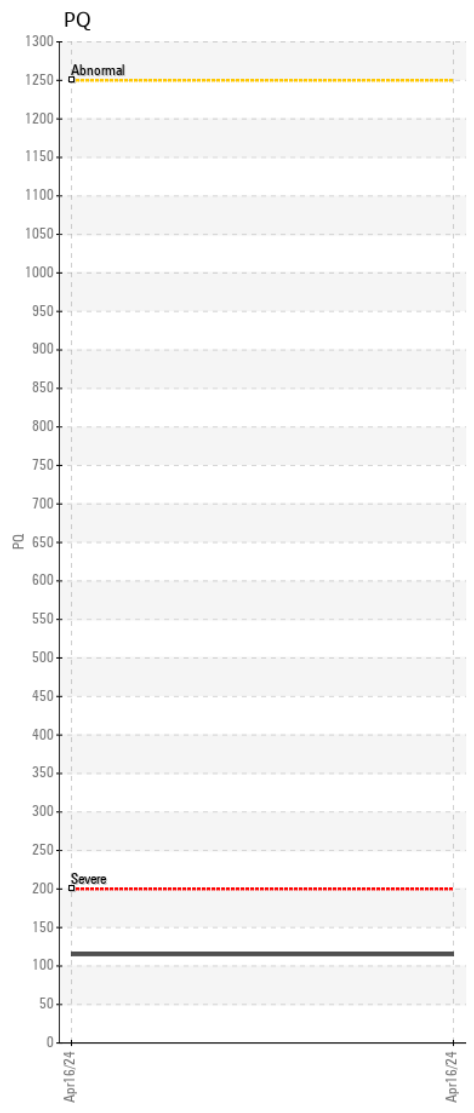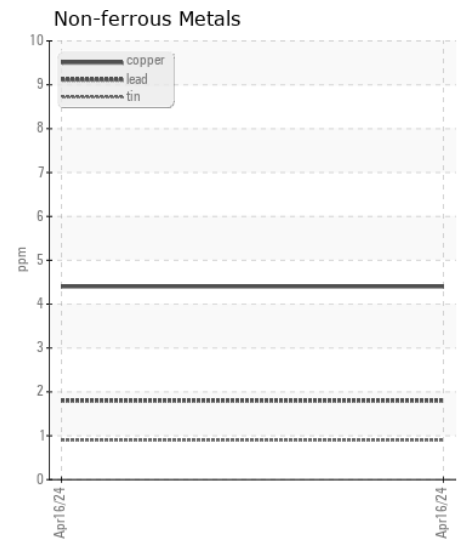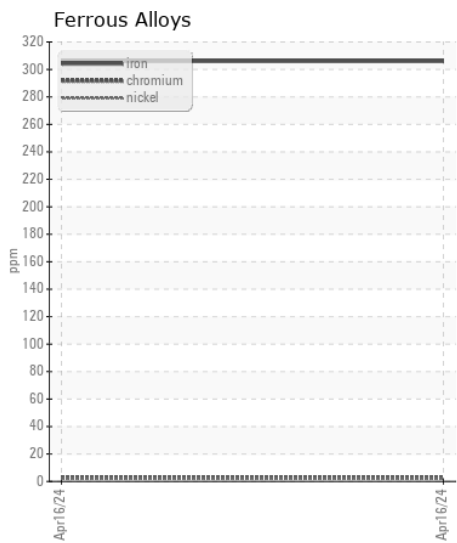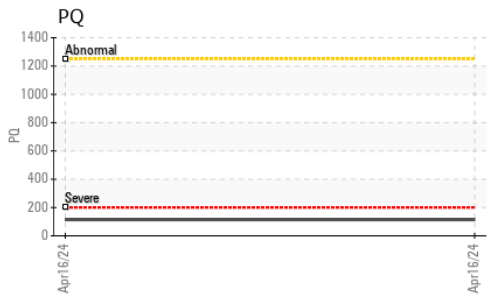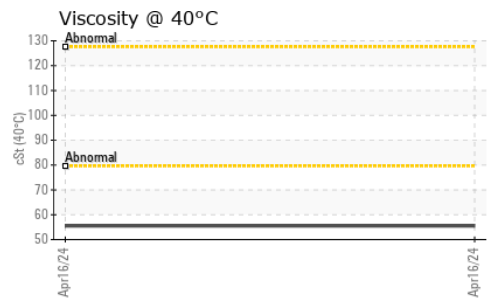

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : JR0212435 **Received** : 17 Apr 2024  
**Lab Number** : 06152305 **Tested** : 18 Apr 2024  
**Unique Number** : 10982383 **Diagnosed** : 22 Apr 2024 - Sean Felton  
**Test Package** : CONST ( Additional Tests: PQ )

**JRE - GARNER**  
 4161 AUBURN CHURCH RD  
 GARNER, NC  
 US 27529  
 Contact: RALEIGH SHOP

To discuss this sample report, contact Customer Service at 1-800-237-1369.

sean.betts@jamesriverequipment.com; catherine.anastasio@wearcheck.com

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

T: (919)614-2260

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

F: (919)779-5432