



WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Area  
**MONKEY FIST MARINE [1610062]**  
Machine Id  
**VOLVO PENTA A584125 - INBOARD**  
Component  
**Center Gearbox**  
Fluid  
**GEAR OIL SAE 75W90 (--- GAL)**

### RECOMMENDATION

No corrective action is recommended at this time. Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		VPA054933	---	---
Sample Date		Client Info		25 Mar 2024	---	---
Machine Age	hrs	Client Info		0	---	---
Oil Age	hrs	Client Info		0	---	---
Filter Age	hrs	Client Info		0	---	---
Oil Changed		Client Info		N/A	---	---
Filter Changed		Client Info		N/A	---	---
Sample Status				NORMAL	---	---

### WEAR

All component wear rates are normal.

PQ		ASTM D8184		24	---	---
Iron	ppm	ASTM D5185m	>150	90	---	---
Chromium	ppm	ASTM D5185m	>10	1	---	---
Nickel	ppm	ASTM D5185m	>10	3	---	---
Titanium	ppm	ASTM D5185m		1	---	---
Silver	ppm	ASTM D5185m		<1	---	---
Aluminum	ppm	ASTM D5185m	>5	9	---	---
Lead	ppm	ASTM D5185m	>65	2	---	---
Copper	ppm	ASTM D5185m	>80	4	---	---
Tin	ppm	ASTM D5185m	>8	1	---	---
Vanadium	ppm	ASTM D5185m		<1	---	---
White Metal	scalar	*Visual	NONE	NONE	---	---
Yellow Metal	scalar	*Visual	NONE	NONE	---	---

### CONTAMINATION










There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>20	4	---	---
Potassium	ppm	ASTM D5185m	>20	2	---	---
Water		WC Method	>0.2	NEG	---	---
Silt	scalar	*Visual	NONE	NONE	---	---
Debris	scalar	*Visual	NONE	NONE	---	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---	---
Appearance	scalar	*Visual	NORML	NORML	---	---
Odor	scalar	*Visual	NORML	NORML	---	---
Emulsified Water	scalar	*Visual	>0.2	NEG	---	---

### FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185m		7	---	---
Boron	ppm	ASTM D5185m	400	155	---	---
Barium	ppm	ASTM D5185m	200	0	---	---
Molybdenum	ppm	ASTM D5185m	12	2	---	---
Manganese	ppm	ASTM D5185m		3	---	---
Magnesium	ppm	ASTM D5185m	12	7	---	---
Calcium	ppm	ASTM D5185m	150	89	---	---
Phosphorus	ppm	ASTM D5185m	1650	1218	---	---
Zinc	ppm	ASTM D5185m	125	74	---	---
Sulfur	ppm	ASTM D5185m	22500	25773	---	---
Visc @ 40°C	cSt	ASTM D445	109	94.9	---	---

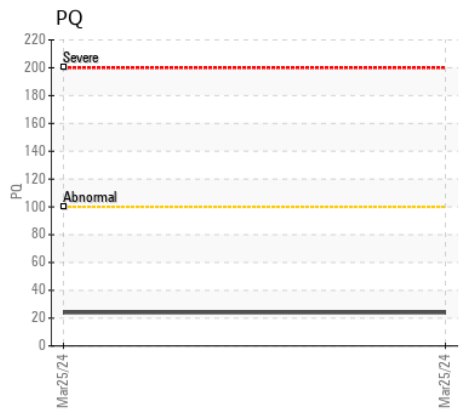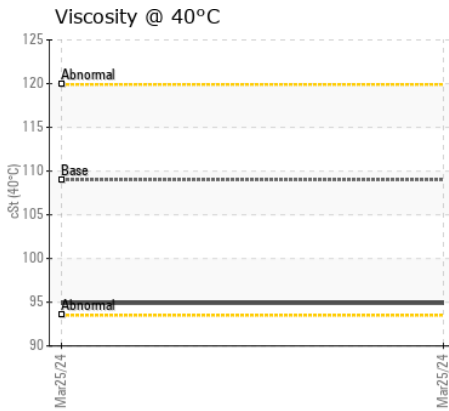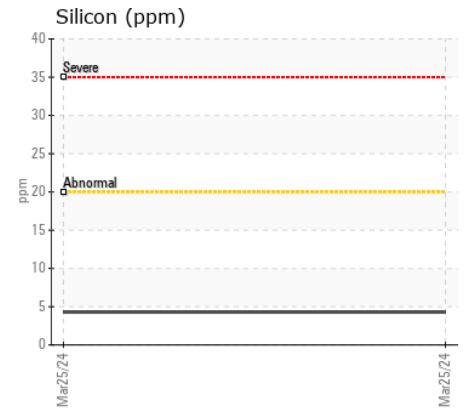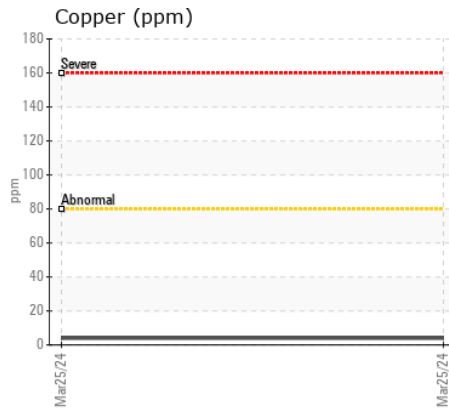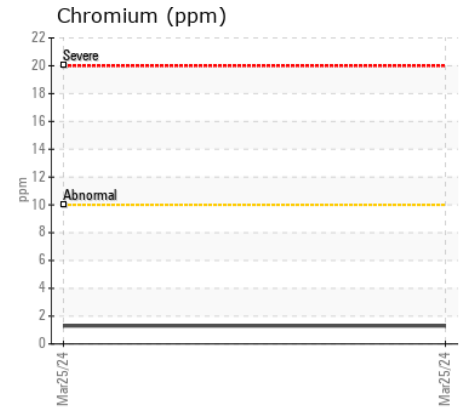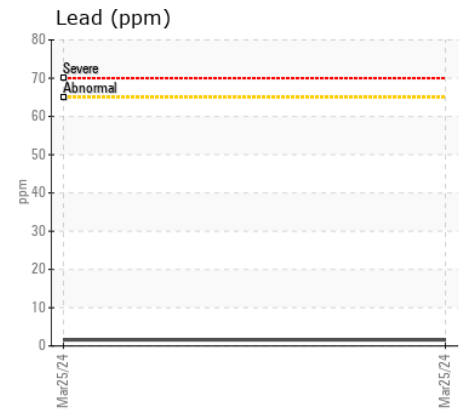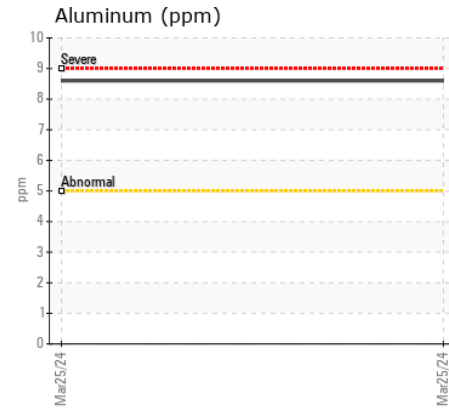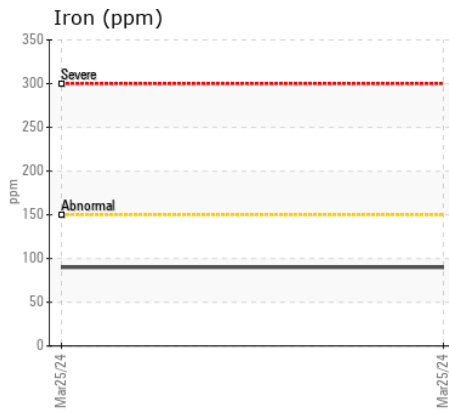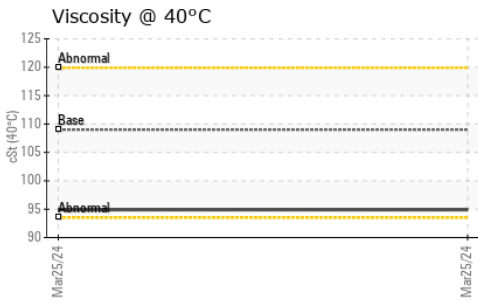

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : VPA054933 **Received** : 17 Apr 2024  
**Lab Number** : **06152312** **Tested** : 19 Apr 2024  
**Unique Number** : 10982390 **Diagnosed** : 22 Apr 2024 - Sean Felton  
**Test Package** : MOB 1 ( Additional Tests: PQ )

**Pacific Power Group - VP981534**  
 7215 S 228th St  
 Kent, WA  
 US 98032  
 Contact: PAT RYAN  
 pryan@pacificpowergroup.com  
 T: (253)520-5163  
 F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)